

Workstation solutions


POWER AND DATA DISTRIBUTION
FOR THE OFFICE ENVIRONMENT

CATALOGUE

**Floor system:
raised access floor and
screed floor**




P. 12-14
Floor box
screed &
raised floor




P. 15-18
Screed & raised
floor boxes
for carpet

**Connections:
pop-up box, grommets,
desktop module, flush
mounting and mini-columns**




P.56-57
Pop-up
boxes




P. 60-61
Desk
grommets

**Wall and ceiling systems:
DLP wall trunking and
columns**




P. 74-78
Snap-on
trunking



P. 83-92
DLP U-PVC
trunking system

Selection charts:



P. 26-27
Soluflex




P. 72-73
Snap-on
trunking

DISCOVER THE NEW SYSTEMS



Floor boxes
(p. 08)

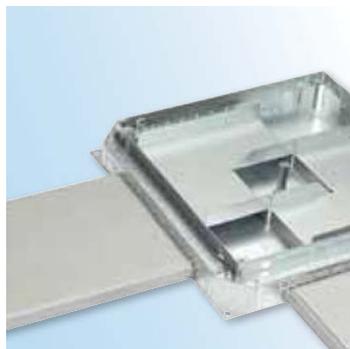

**Junction boxes &
Raceways**
(p. 43)




Pop up boxes
(p. 54)




P. 19-22
Floor boxes
for tiles




P. 23
Floor
access unit
for raised floor




P. 28-29
Soluflex



P. 44-51
Raceways &
junction boxes
for screed floor



P. 64-65
Desktop
module




P. 68-69
Flush
mounting




P. 96-99
DLP
aluminium
trunking system



P. 101-104
Aluminium
snap-on
column



P. 80-82
DLP U-PVC



P. 94-95
DLP
aluminium



Desk grommet
(p. 58)




Other systems
(p. 100)

**INTEGRATED SOLUTIONS
FOR COMMERCIAL, INDUSTRIAL
AND RESIDENTIAL PROJECTS**

With products and solutions tailored to commercial, industrial and residential markets, Legrand is a worldwide benchmark. From control and command devices to cable management, power distribution and voice-data-image (VDI) systems, Legrand provides many solutions designed to manage lighting, heating, energy, networks and building access.

The Legrand catalog features nearly 200,000 products in some 78 product families—a wide choice by any measure.

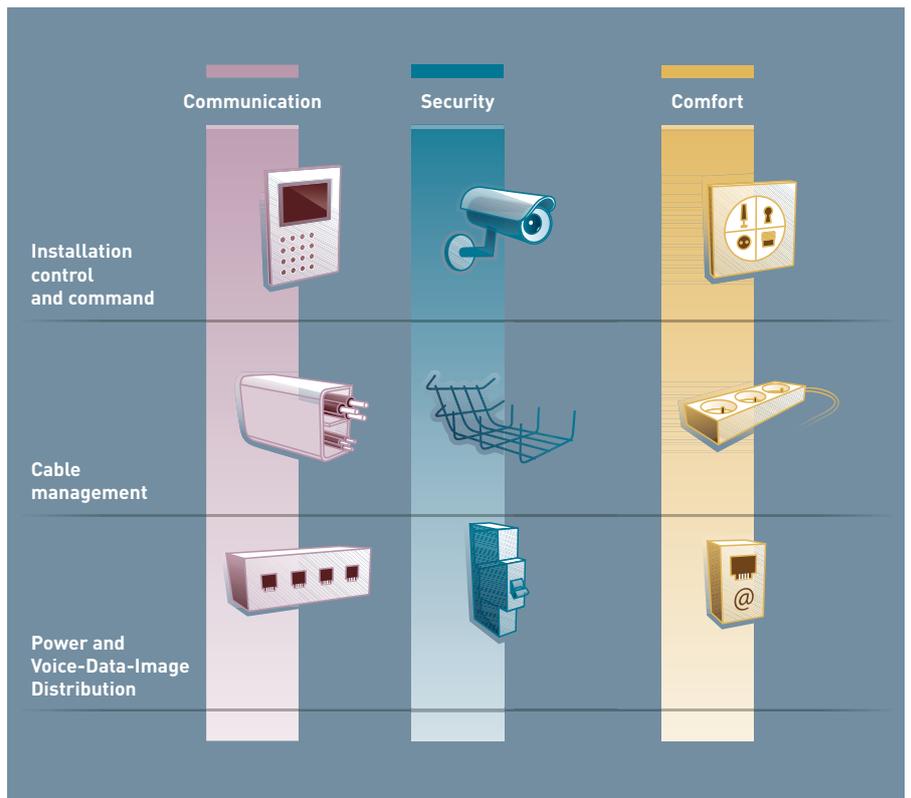

CONTINUOUS INNOVATION

Over 2000 people work at our engineering and design offices, inventing and developing the solutions of tomorrow.



High value-added solutions

Legrand’s competitive edge lies in its ability to provide high value-added products and services for both end users and electrical professionals. For Legrand, creating value means coming up with solutions for lower energy consumption, but also integrating product design into the overall development process. And, of course, finding solutions to fit everyone’s needs

LEGRAND IN INDIA

Legrand (India) has been the leader in the protection business for the last four decades with a range that includes circuit breakers up to 6300A and distribution boards. Taking advantage of this strong position and the expertise of the group we have progressively developed additional product ranges like wiring devices, home automation, door entry, lighting management system, cable management and structured cabling.



LEGRAND A GLOBAL PLAYER


Legrand is established in over 70 countries, with a comprehensive offering of products and systems for electrical and digital infrastructures in commercial, industrial and residential buildings.

A wide-ranging offer and leading positions make the group a worldwide benchmark.

AN ACTIVE INTERNATIONAL PRESENCE

More than 70 subsidiaries and offices, sales in close to 180 countries.



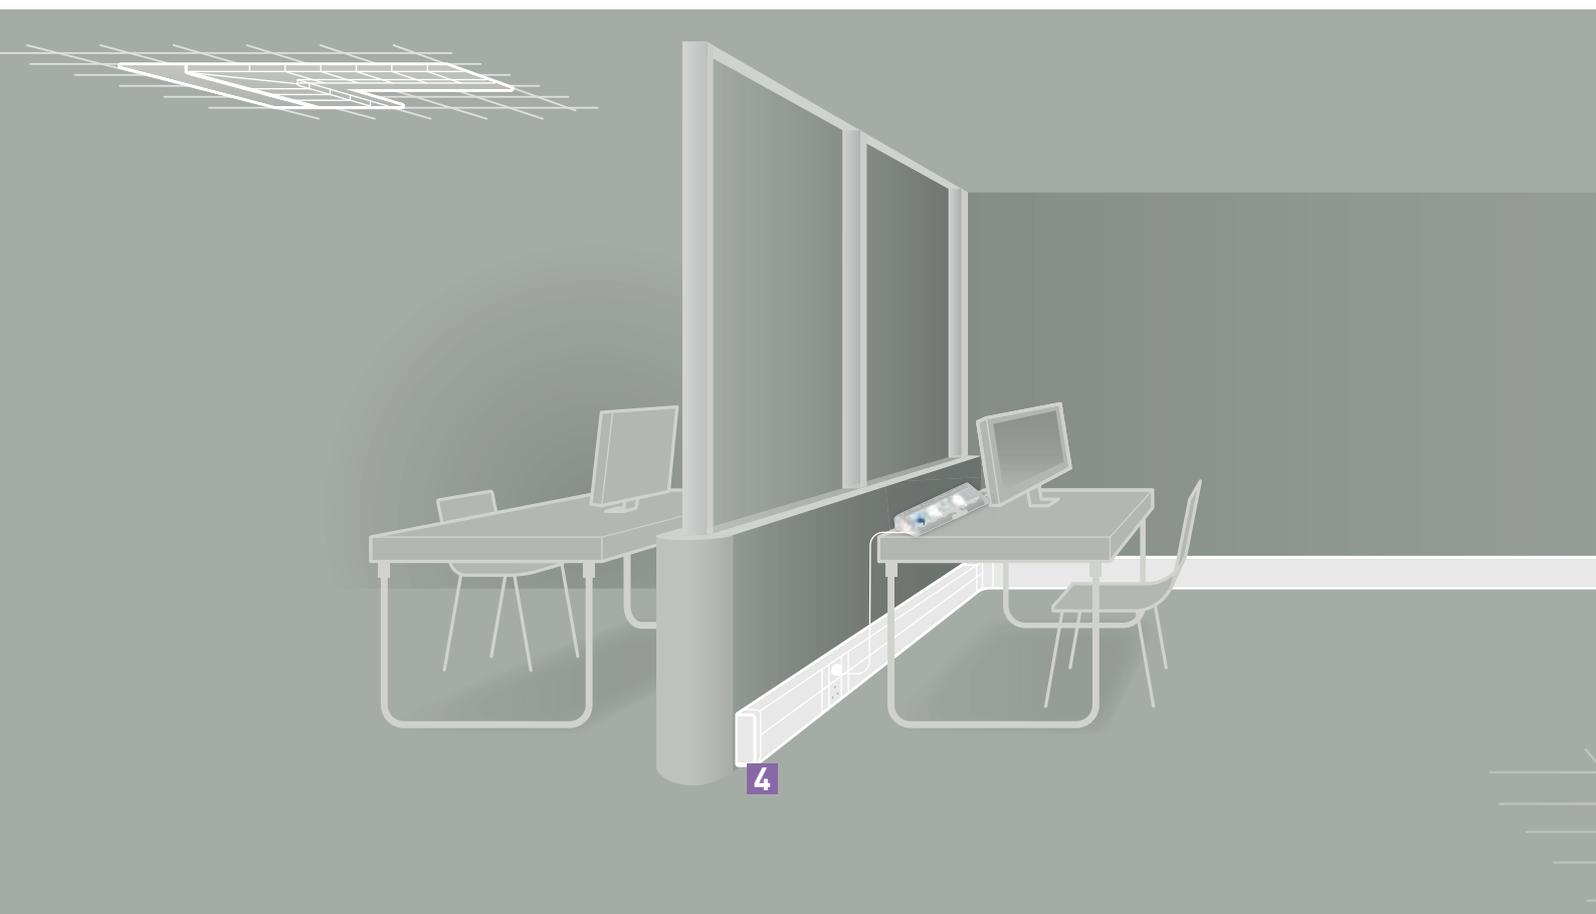

1. FLOOR BOXES




LID & TRIM

The floor boxes for tiles and marble with their neat and attractive design can be used for reception areas, executive offices...

Very discreet, they are perfectly flush with the finished floor. The flip-up floor boxes are ideal solutions to meet occasional connection needs.

2. FLOOR

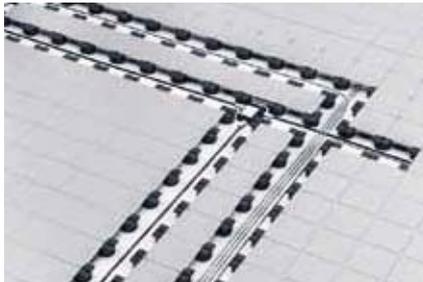

Legrand offer different solution for power & data distribution. Raise access floor & Screed access floor.

Traditional raised access floor trunking system: This trunking system is compatible with any traditional raised access floor and has been especially designed to ensure fast installation, reliability, robustness and flexibility.

Soluflex: Soluflex is the innovative low-level flooring system engineered for a quick installation and ease reconfiguration.

SCREED FLOOR SYSTEMS

Screed PVC and metallic raceways are a quick and easy way to install power and data distribution throughout screed floors. These systems are particularly robust and are designed to support superior loads.

3. CONNECTION



POP-UP BOXES CONNECTION & DESK SOLUTION

Ideal solution for occasional visitors in reception areas, meeting rooms, etc.

Can be installed in screed or raised floor or mounted directly in the desk.

CABLE MANAGEMENT A COMPREHENSIVE OFFER FOR ANY TYPE OF BUILDING



Office space, industrial buildings or housing, whatever the project and its requirements,

Legrand has end-to-end system solutions for power and data cable management. Legrand's floor, overhead and perimeter cable management systems are engineered to make it easy to get power delivered where users need it. Quick and safe to install, these solutions were designed to optimize cost-effectiveness.

4. PERIMETER




TRUNKING

For power distribution and connection, PVC, steel or aluminium trunking offers installations the greatest flexibility and scalability. Wiring device ranges such as Myrius or Arteur can be seamlessly integrated taken from building success together.

1 | SOLUFLEX FLOOR SYSTEM


Soluflex floor box tile allows installation of full backbox or modular backbox.

Minimum floor height: 90 mm.

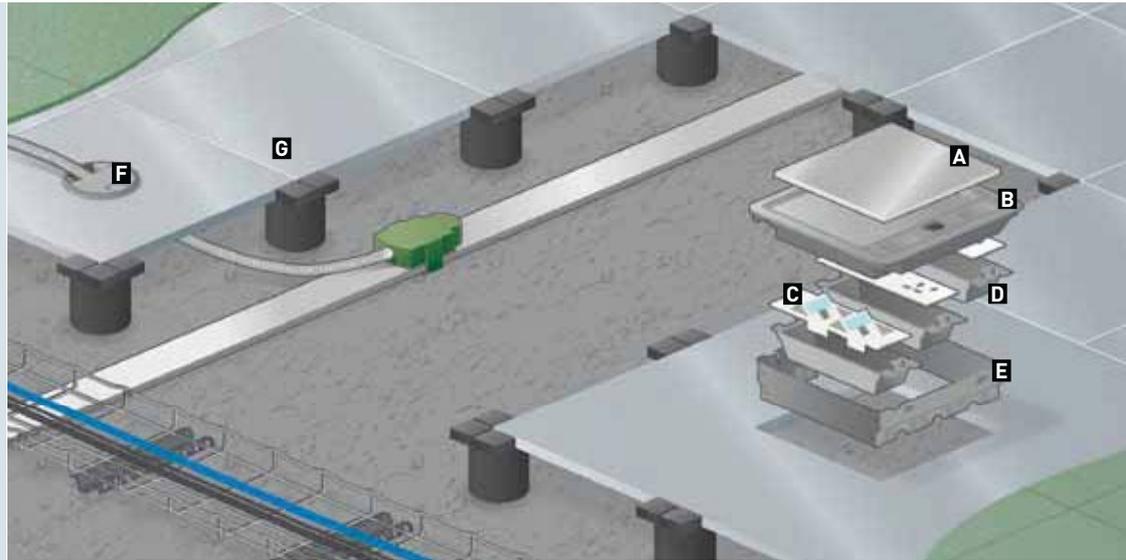

2 | TRADITIONAL RAISED ACCESS FLOORS


Full backbox or adjustable height multi basket support can be easily fitted after cutting floor slabs.

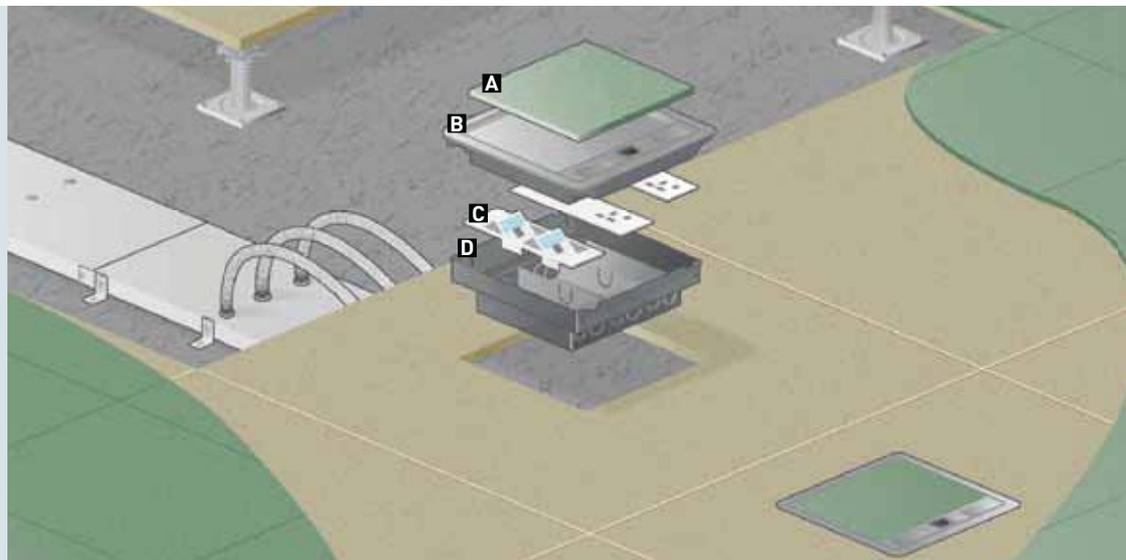

3 | SCREED FLOOR SYSTEMS

The screed floor backbox is supplied with a special cover allowing floor box height adjustment according to different screed thicknesses.

The floor box is also available for tile and marble applications.

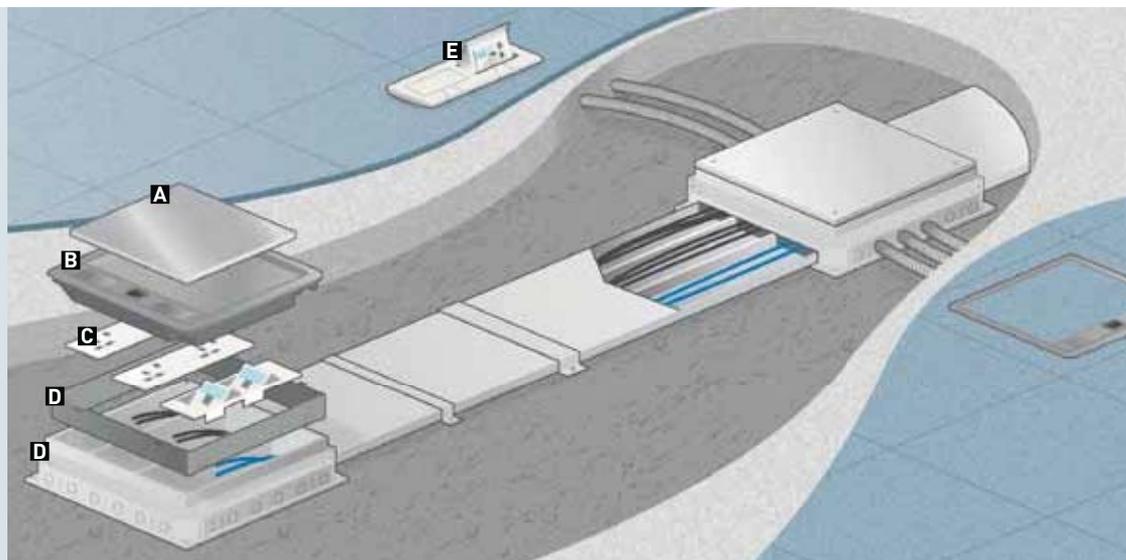

- A** Stainless steel insert
- B** Lid and trim
- C** Wiring devices plates
- D** 3 modules
- E** Support frame
- F** Grommet see
- G** Soluflex floor system



- A** Carpet
- B** Lid and frame
- C** Wiring devices plates
- D** Full backbox

- A** Stainless steel insert
- B** Lid and trim
- C** Wiring devices plates
- D** Backbox
- E** Flip-up floor boxes

FLOOR BOXES

Simplicity and flexibility: the same lid and trim, the same socket outlets and the same wiring device supports are compatible with any type of Legrand floor systems.

floor boxes selection chart

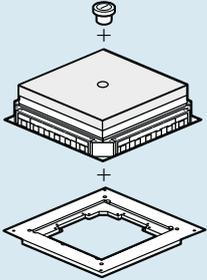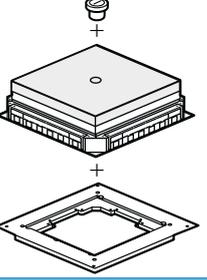Solution for	Type of Floor Box	Lid and Trim			
Screed floor	3 module floor box	0896 44			
	Floor box for carpet	6896 31			
	Floor box for tile / marble	Lid and Trim - SS304; 2 cable outlet	6896 52		
		Lid and Trim - Headband and single cable outlet - Painted Grey RAL 7031	6896 55		
		Lid and Trim - Headband and single cable outlet - Stainless Steel GI	6896 56		
	Floor box without cable exit - IP 66	- 8 KN Load (p. 22)	0896 83 + 0896 85		
		- 20 KN Load	0896 84 + 0896 85		
	Heavy duty floor box	Floor box with cable exit - IP 14 - 8 KN Load	0896 87 + 0896 86 + 0896 83		
			0896 87 + 0896 86 + 0896 84		
	Raised floor	3 module floor box	0896 44		
Floor box for carpet		6896 31			
Access box		0893 07			

Bold catalogue numbers are products normally available with Legrand (India) stockists.
Cat.Nos that are not bold - delivery within 4 - 8 weeks from the date of order.

Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) stockists in multiples of the same.

	Back box	Support plates for power	Waved support plate for data	Plates for data
0896 49		-	-	-
6896 34		6896 17	6896 78	6896 62
0896 04		6896 17	6896 78	6896 62
0896 04		6896 17	6896 78	6896 62
0896 04		6896 17	6896 78	6896 62
0896 34		-	-	-
0896 34		-	-	-
0896 34		-	-	-
0896 34		-	-	-
6896 38		6896 17	6896 78	6896 62
-	-	-	-	-

Bold catalogue numbers are products normally available with Legrand (India) stockists.
Cat.Nos that are not bold - delivery within 4 - 8 weeks from the date of order.
Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) stockists in multiples of the same.




METAL HANDLE AND LOCKING SYSTEM
for easy handling and securing access



Discreet integration with the floor

LID AND TRIM
common to all floor types.
Reversible lid for maximum flexibility

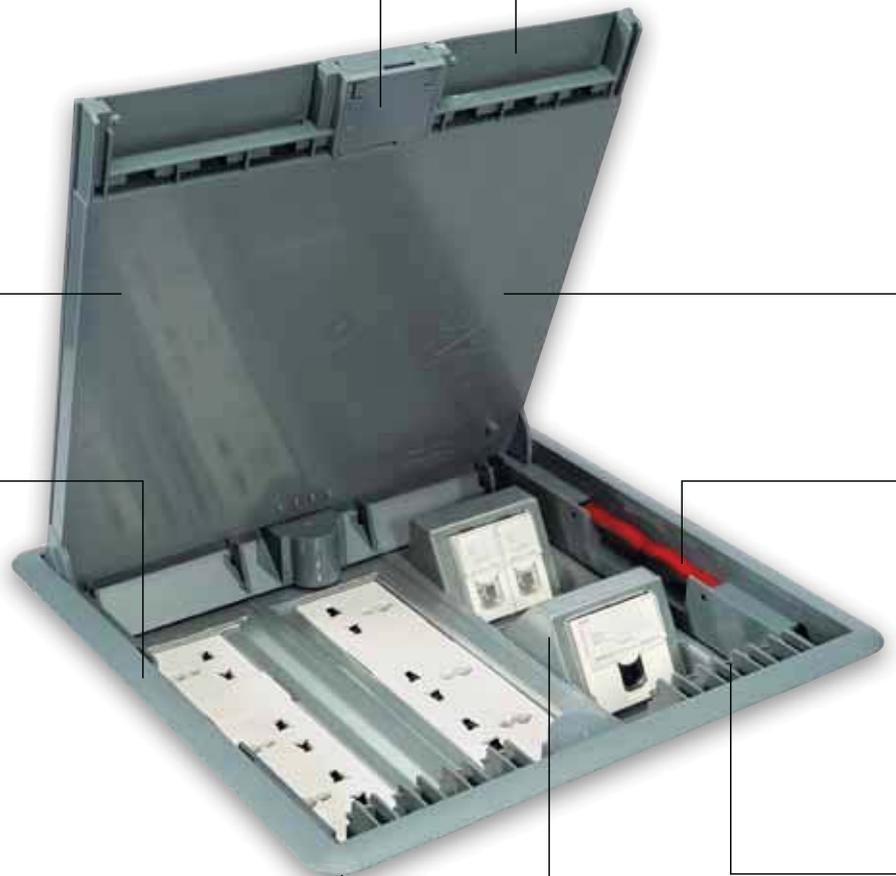

ROUNDED CORNERS



FLEXIBLE CABLE EXITS
for maximum protection of cables

Grey finish to suit the color
of the floor covering.
Supplied with protective
film for a perfect finish



LEVERS
for easier handling and removal
for installing on carpet

CABLE GUIDES

WAVED SUPPORT PLATES
for data connection

LID AND TRIM FOR CARPET

Lid and trim common to all floor types

Simple to use and fast implementation, the floor boxes for carpet can be installed both on raised access and concrete floors.

floor boxes 3 module for screed floor and raised floor

floor boxes 3 modules for screed floor and raised floor



Conform to EN 50 085 - 2.2 and EN 60670-23
Flat and simple installation
Compatible with raised floor and screed floor system

Pack	Cat.Nos	Floor service outlet boxes - 3 modules
1	0896 44	Access units for raised or concrete floor (minimum height 80 mm) Floor service outlet box - 3 modules. Grey RAL 7031. To be Equipped with Arteor Mechanism
1	0896 49	Flush mounting box for concrete for Cat.No 0896 44

Material characteristics

The floor boxes are on plastic PC/ABS RAL 7031.
Temperature of use of transport and storage: -5°C/+60°C

- Conforms to standard NF EN 60.670-1
- IP 20/IK07
- Grey color RAL 7031

Technical information

Compression test, 500N / 1cm² during 1 min :
Comply with norm CEI 60670-23 (2004)

No degradation after 10000 opening/closing

For restoration in the presence of a technical floor low depth or for concrete (height 80mm)


To be equipped with 2 module Arteor sockets & 1 module data or switch

2 covers of independent exit for the cables current low and high tension current

Dimensions


Under floor boxes 3 modules:

Cat.No 0896 44

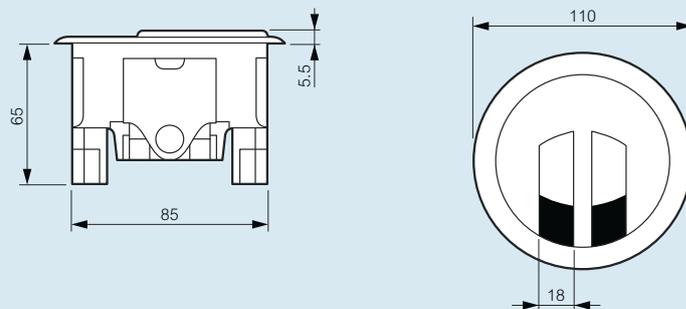

Flush mounting box:

Cat.No 0896 49

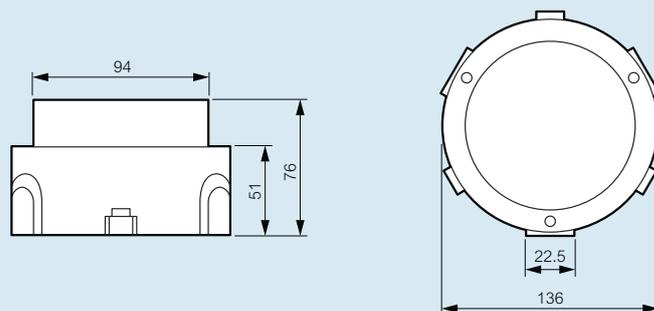


floor boxes 3 modules

for screed floor and raised floor


Installation

In raised floor

Minimum raised floor height: 80 mm

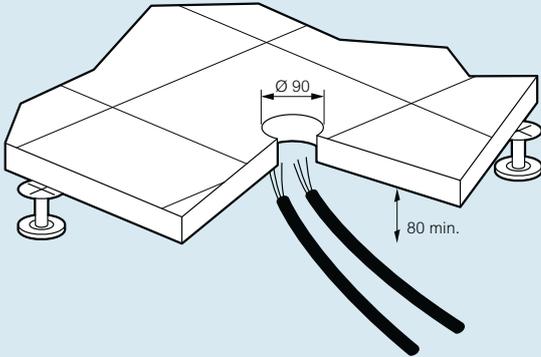


Can be equipped with: 2-module socket outlet and 1-module RJ 45 data socket. Direct clip into 3-module support frames

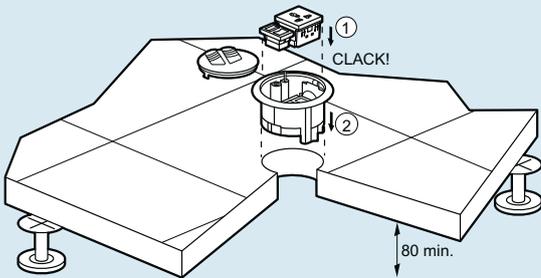


In concrete floor

With flush-mounting box Cat.No 0896 49

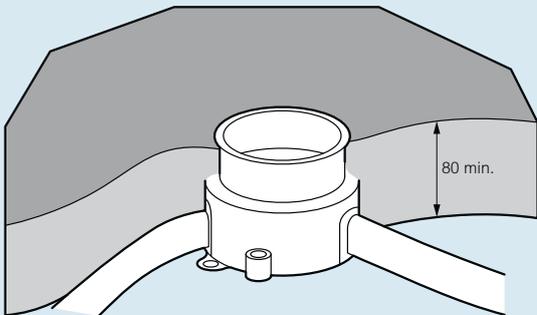

Can be equipped with: 2-module socket outlet and 1-module RJ 45 data socket. Direct clip into 3-module support frames

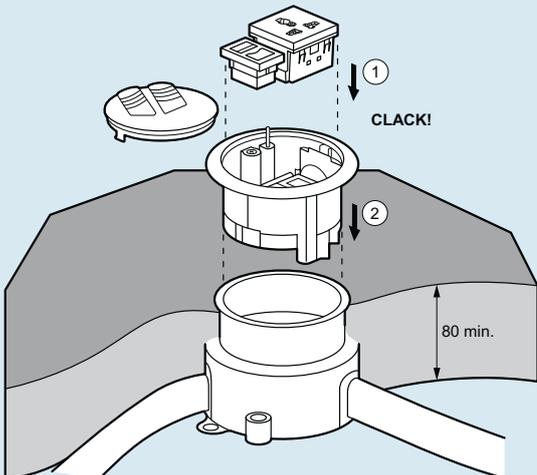

The wiring device support allows to mount:


1 socket Arteor standard 2 modules :




And 1 socket RJ 45 1 module only



Compatible with straight outlet or side outlet plug

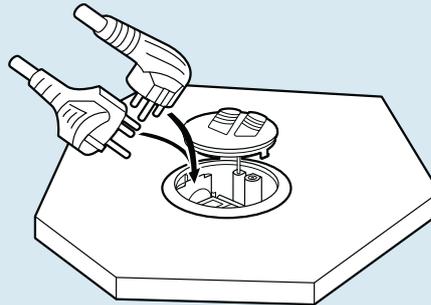

The support frame for wiring devices tilt up in order to accept a straight outlet plug or a side outlet plug

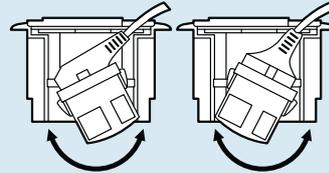

floor boxes for carpet

raised floor and screed floor



Technical characteristics & installations (p. 15-17)

Conform to EN 50 085 - 2.2 and EN 60670-23
 Flat and simple installation
 Compatible with raised floor, flush floor and screed floor system

Pack	Cat.Nos	Floor boxes for raised floor	
1	6896 38	Full backbox for raised floor 3 compartments (264 x 264 mm). Height 86 mm. Backbox to be connected to trunking with flexible conduits.	
5	6896 31	Lid & trim for 3 compartment floor box Grey cover RAL 7031 with flexible cable exits. Size 265 mm x 265 mm	
12	6896 62	Support plates for floor boxes 77 mm width plate Blank plates for floor box. To cover of an unused compartment.	
1	6896 17	Flat support plate 8 module for integration of Myrius/Arteor mechanisms	
4	6896 78	Waved support plates. For 4 modules (2 x 2 modules)	

*Floor box raised floor with support plates & wiring devices
 ** Floor box screed floor with support plates & wiring devices



Pack	Cat.Nos	Floor boxes for screed floor	
1	6896 34	Full backbox for screed floor 3 compartments (325 x 325 mm). Accepts PVC and metal screed floor raceways and conduits with Dia20 and 25 mm. Auto adjustable to screed height 65 to 90 mm	
5	6896 31	Lid & trim for 3 compartment floor box Grey cover RAL 7031 with flexible cable exits. Size 265 mm x 265 mm	
12	6896 62	Support plates for floor boxes 77 mm width plate Blank plates for floor box. To cover of an unused compartment.	
1	6896 17	Flat support plate 8 module for integration of Myrius/Arteor mechanisms	
4	6896 78	Waved support plates. For 4 modules (2 x 2 modules)	
10	6896 92	Stainless steel insert for lid For a metal finish on lid. To be used instead of fitting carpet onto the lid For 3 compartment floor boxes dimension : 245.5 x 210 mm	

lid and trim for carpet floor boxes


■ Application

Lid and trim can be used for all applications: screed and raised access floor systems. It allows a uniform finish within the project

Cat.No 6896 31

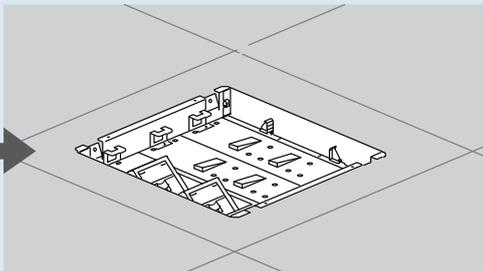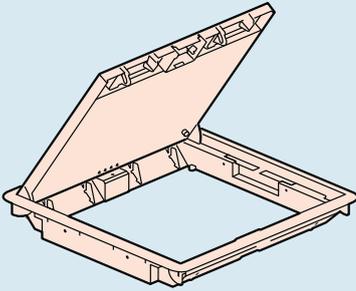

Raised floor

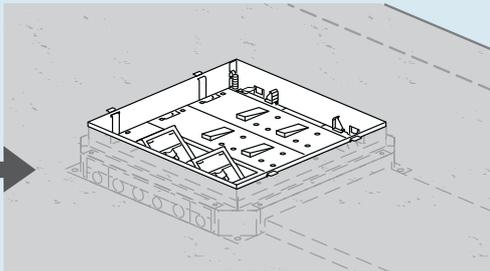


Screed floor

■ Functions

Lid & trim

Flexible cable exits


Flexible cable exits: maximum cable capacity 4 cables Ø7 mm + 3 cables Ø11 mm. Both systems provide maximum protection for cables. Flexible exit does not require closing when not in use.



Soft cable exits




Site protection cover

Lid and trim comes with a building site protection to avoid damages during installation. This site protection should be removed to access the floor box and can be repositioned afterwards. Site protection cover should remain on the floor box until hand-over of the project

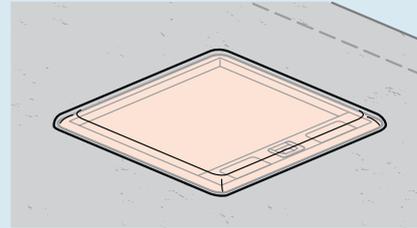

Reversible lid

The lid is reversible (180°) to adapt to office furniture reconfiguration

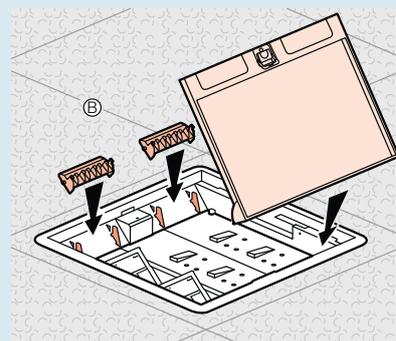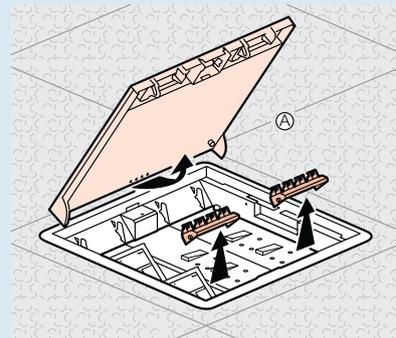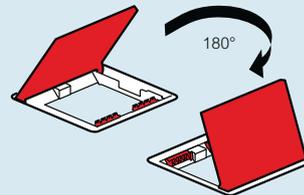



lid and trim for carpet floor boxes

■ Functions

Lid & trim (continued)

Locking system



The floor box can be locked by means of a locking system on the lid (hidden under the opening handle). For safety reasons, floor box should not be locked when in use

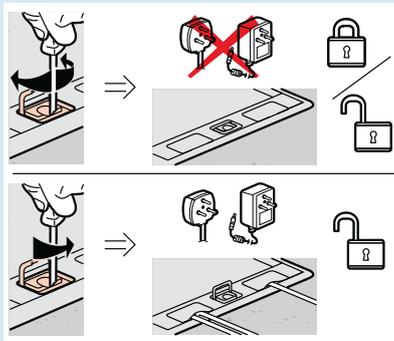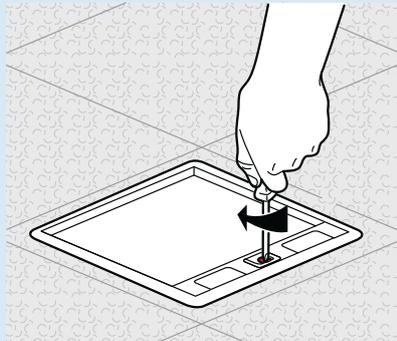

■ Dimension

Lid & trim

Maximum cable capacity 4 cables Ø7mm + 3 cables Ø11mm

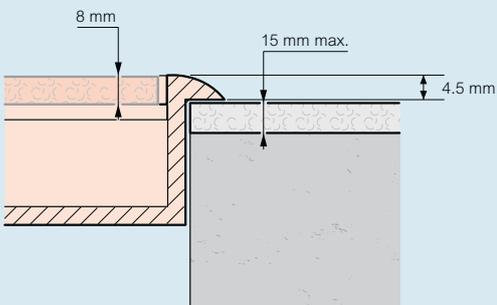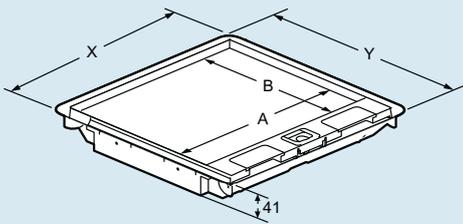


Carpet thickness < 15 mm

Cat.No	X	Y	A	B
6896 31	280	280	245.5	210


- 3 compartments
- Grey RAL 7031

■ Installation process


Fix the lid and trim directly onto the backbox, push and fit system. Lid and trim can be assembled with backbox even before carpet fitting

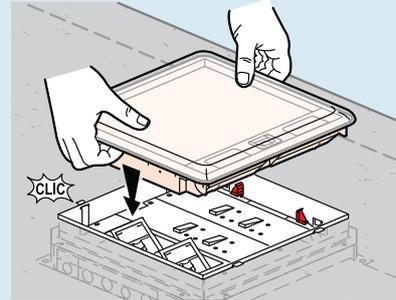


To fit carpet, pull the levers on both sides to take out the lid and trim

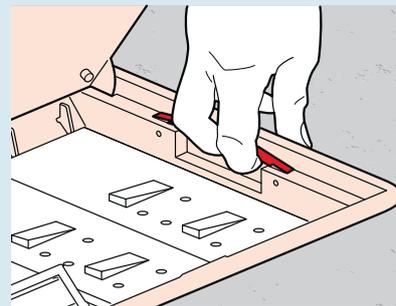


Fit the carpet to the backbox edge

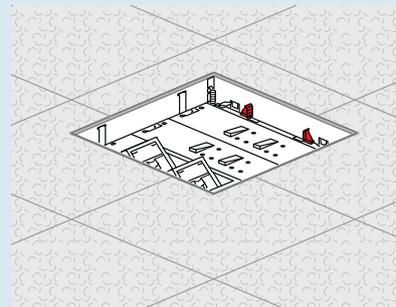

Push the lid and trim back on to the backbox. The trim will adjust to the carpet thickness

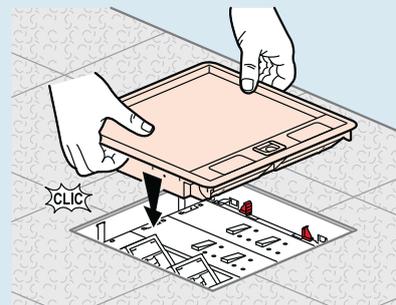


Put 8 mm carpet tile on the lid, to have perfect finish

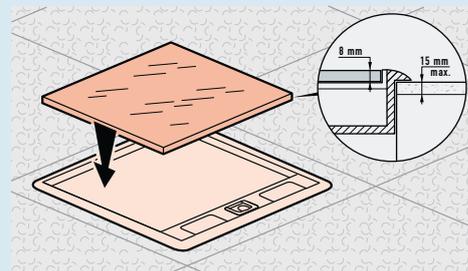

floor box for carpet


raised floor

System overview

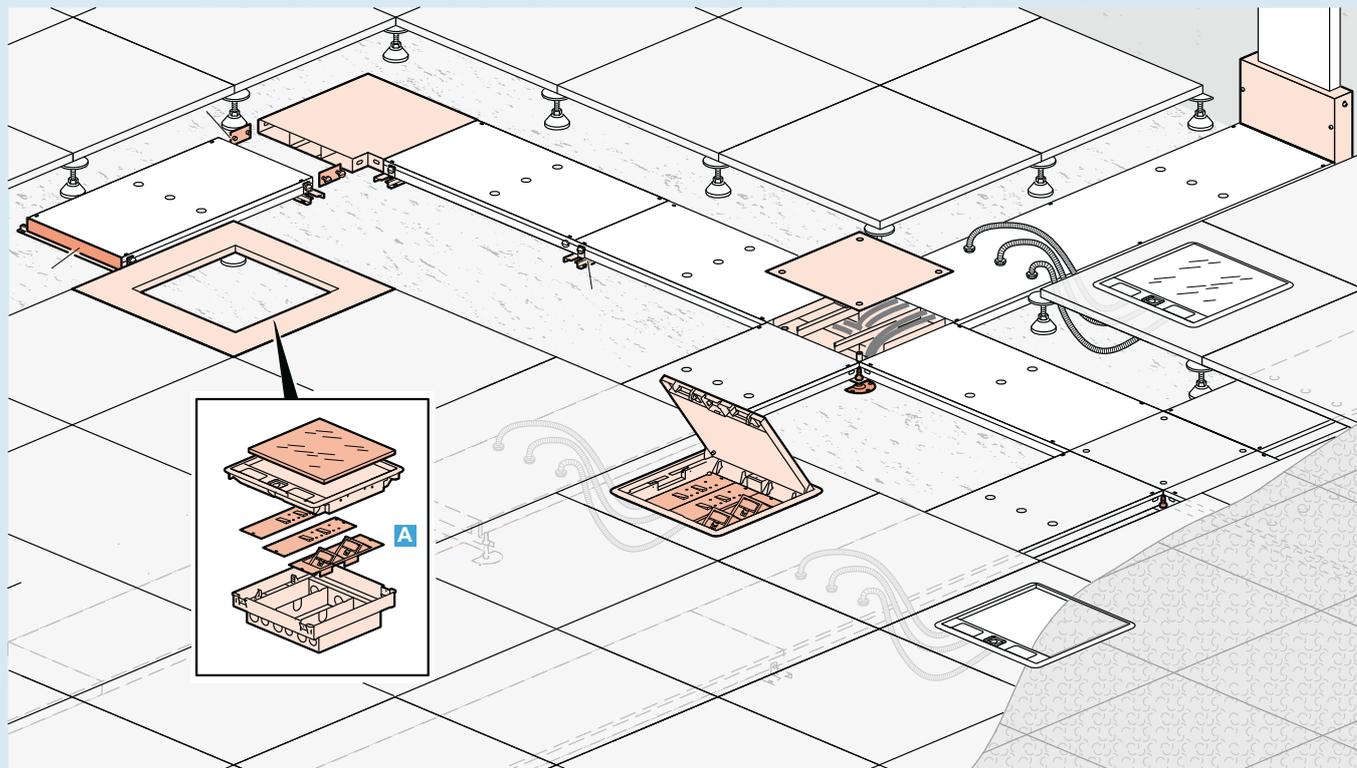


A Floor box (full backbox + lid and trim) Socket outlets and data sockets plates to be ordered separately

Full backbox Cat.No 6896 38 for raised floor

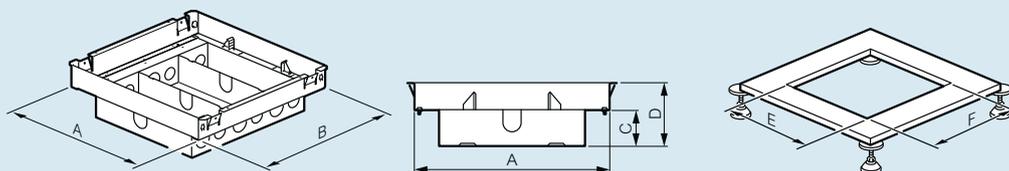


Cat.No	A (mm)	B (mm)	C (mm)	D (mm)	No compartment
6896 38	263	263	48	86	3


Installation principle

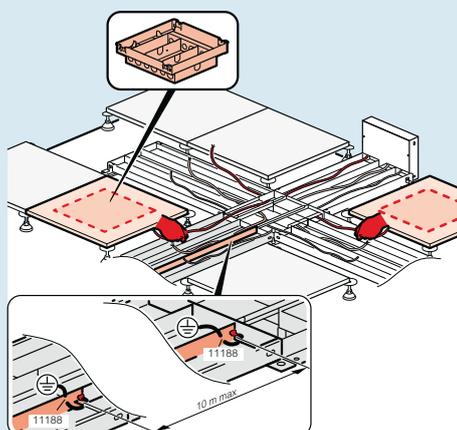

Cut raised access floor tiles according to backbox size and earth the system (minimum every 10 meters)

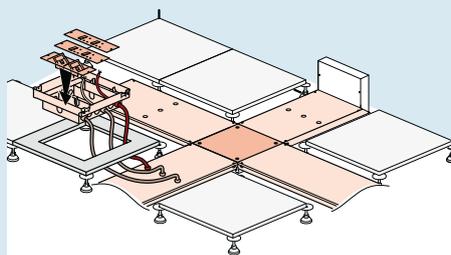


On trunking, remove knockouts to fit flexible conduit. Fix the wiring accessory plates. Earth the system

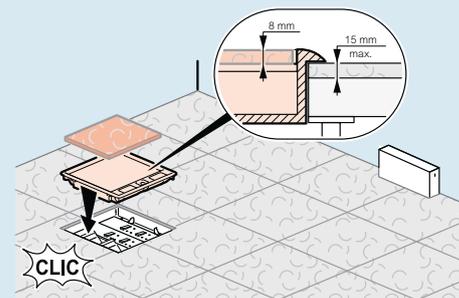

Fit the floor covering (carpet,...) and clip the lid and trim onto the backbox (push and fit principle)

floor boxes for carpet screed floor


System overview

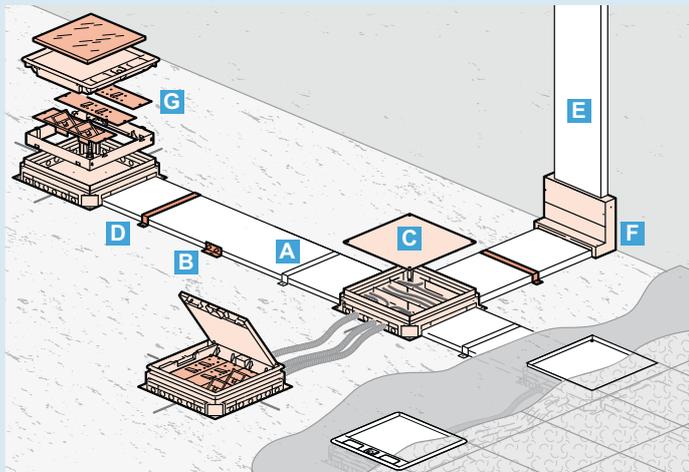

- A** Raceways
- B** Coupler
- C** Junction box
- D** Fixing bracket
- E** Vertical trunking such as DLP
- F** Riser
- G** Floor box (back-box + lid and trim)
Socket outlets and data socket plates to be ordered separately

Backbox Cat.Nos 6896 34 and 0896 04


The backbox should be fixed directly on the slab.
The backbox has to be equipped with wiring accessory plates and lid & trim.
The backbox allows deviation of power and data cable:
Adjustable height from 65 to 90mm.
Side plates are pierced to suit raceways and are supplied with knockouts to fit conduits (20 or 25mm diameter).
Backboxes consist of a base, levelling system and a disposable cover protection

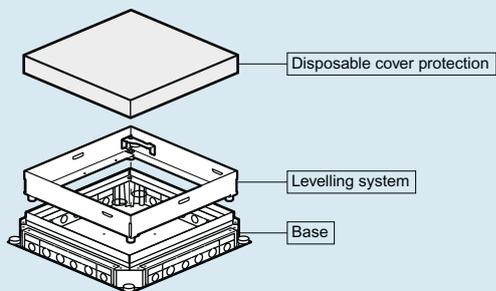

Dimensions

Backbox (mm):

Cat.Nos	X	Y	Z
6896 34 / 0896 04	325	325	90

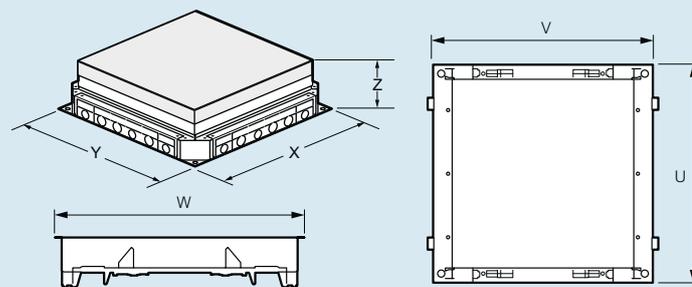

Metal frame (mm):


Cat.Nos	W	V	U
6896 34 / 0896 04	276	264	264

Note: dimensions of the different positions of the metallic frame in the backbox can be found on the page 22 (technical characteristics)


Installation principle

Backboxes are to be used with lid & trim


Once the screed is dry, remove disposable cover protection

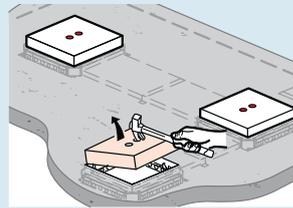


To install the backbox:
Lift the frame (A) and retainers will automatically drop out (B).

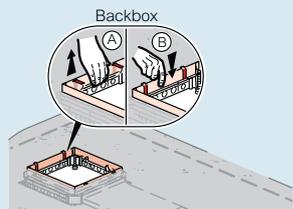


Lock the frame onto the backbox by pushing down clips onto the threaded rods in each corner.

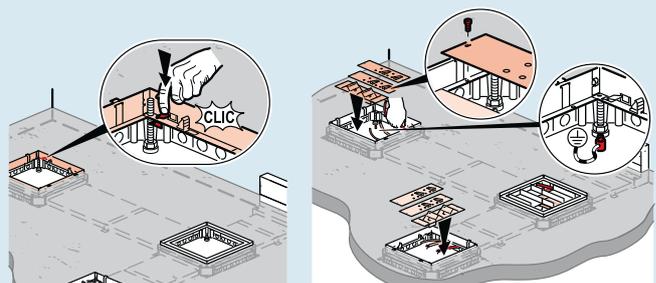

Connect wiring to accessory plates and them fix to the backbox. Finally, earth the system.

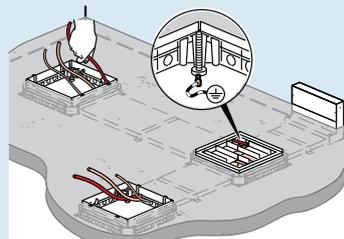

Fit carpet and clip the lid and trim onto the backbox (push and fit principle)

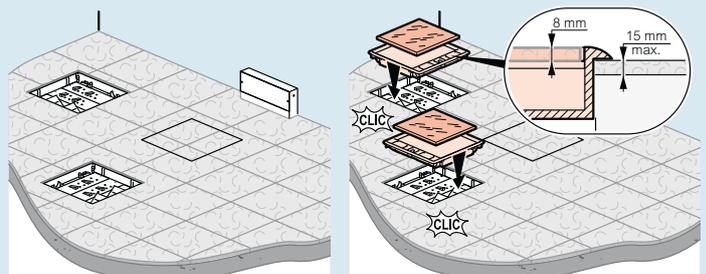

NEW


floor boxes for tile screed floor



0896 04 + 6896 52



6896 52 + 0896 04



6896 52 with cable exit



0896 04 + 6896 56



0896 04 + 6896 55



6896 56 + 0896 04



6896 56 with cable exit



0896 04 + 6896 55*



6896 62



6896 17



6896 78

Technical characteristics & installations (p. 20-21)

Conform to EN 50 085 - 2.2 and EN 60670-23
Flat and simple installation
Compatible with raised floor, flush floor and screed floor system

Pack	Cat.Nos	Floor boxes for tile / marble
1	0896 04	Backbox for screed floor For installation of floor box Cat.No 6896 52 for screed floor system. Screed thickness 65 to 90 mm
1	6896 52	Lid & trim for tiles / marble Double cable outlet (stainless steel 304 lid & trim) Edge trim for tile 15 to 22 mm thickness To be installed in backbox Cat.No 0896 04 for screed floor system.
1	6896 55	Single cable outlet (powder coated head band & cable outlet) Edge trim for tile 8 to 15 mm thickness. To be installed in backbox Cat.No 0896 04 for screed floor system.
1	6896 56	Single cable outlet (stainless steel 304 head band & cable outlet) Edge trim for tile 8 to 15 mm thickness. To be installed in backbox Cat.No 0896 04 for screed floor system.

Pack	Cat.Nos	Floor boxes for tile / marble (continued)
12	6896 62	Support plates for floor boxes 77 mm width plate Blank plates for floor box. To cover of an unused compartment.
1	6896 17	Flat support plate 8 module for integration of Myrius/Arteor mechanisms
4	6896 78	Waved support plates. For 4 modules (2 x 2 modules)

*Floor box for tile (8-15 mm thick) with support plates & wiring devices



Bold catalogue numbers are products normally available with Legrand (India) stockists. **Cat.Nos that are not bold** - delivery within 4 - 8 weeks from the date of order. **Bold packing quantity** is our mandatory packing. Orders to be placed by Legrand (India) stockists in multiples of the same.
Red catalogue numbers : new products

floor boxes for tile

screed floor

■ Lid & trim


Floor box for tile / marbles
Cat.Nos 6896 52 / 55 / 56

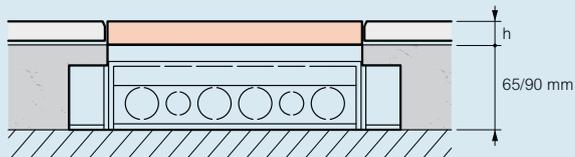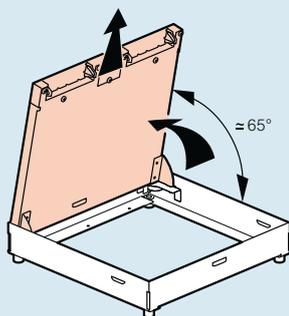

Total screed thickness has to be between 65 and 90 mm

Backbox for tiles/marble	Lid and trim for floor box for tiles/marble	Screed thickness (mm)	Tile thickness h (mm)
0896 04	 6896 52 6896 55 6896 56	65 to 90	15 to 22 8-15 mm 8-15 mm


Dimensions (in mm) Cat.No 6896 52

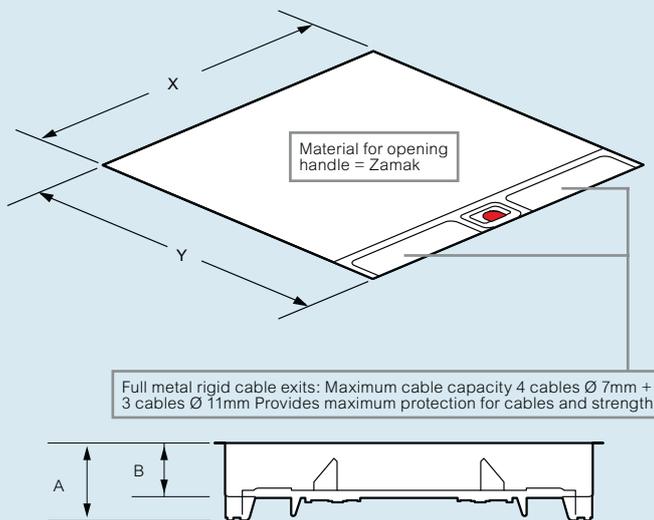


Cat.No	X	Y	A	B
6896 52	264	264	64	54

Material of floor boxes for tiles / marble: stainless steel material AISI 304.

Dimensions (in mm) Cat.Nos 6896 55 / 56

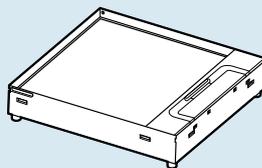

Dimensions (in mm)

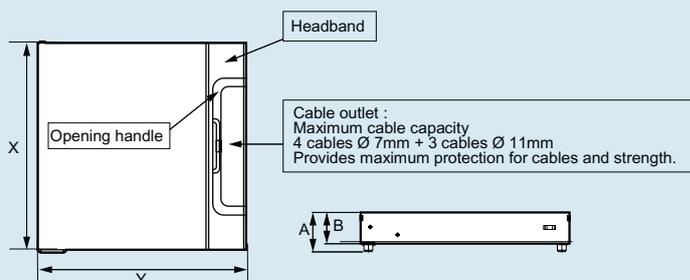

Dimensions (mm):

Cat.Nos	X	Y	A	B
6896 55/56	264	264	57	47

Material of floor boxes for tiles/marble:
galvanised steel (DX51D Z275 MAC)

Material for Headband and Cable outlet:
Cat.No 6896 55 : galvanised steel + paint RAL 7031
Cat.No 6896 56 : stainless steel 304


Material for opening handle:
Cat.No 6896 55 : Zamak + paint RAL 7031
Cat.No 6896 56 : Zamak + send blasting + varnish

■ Functions

Cat.No 6896 52



Rigid cable exits

Full metal rigid cable exits
Maximum cable capacity 4 cables Ø7 mm + 3 cables Ø11 mm
Provides maximum protection for cables and strength

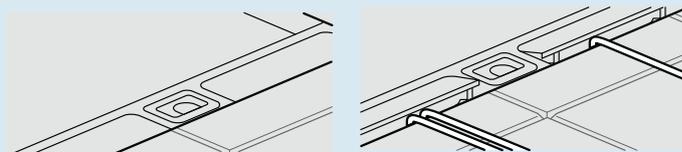


Locking system

The floor box can be locked by means of a locking system on the lid (hidden under the opening handle)
For safety reasons, floor box should not be locked when in use

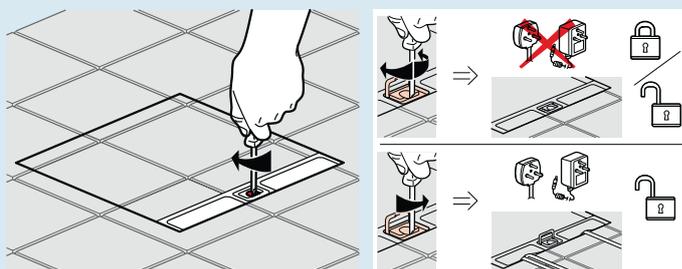


floor boxes for tile for screed floor


■ Installation process

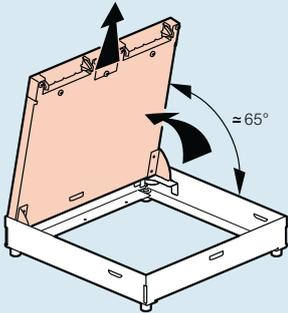


To remove the lid from the trim, hold it under an angle of approximately 65° and pull it out

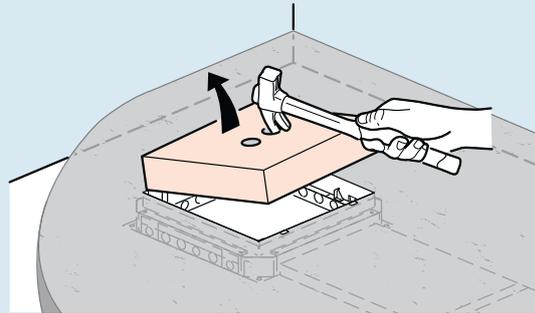


Remove site cover protection from backbox

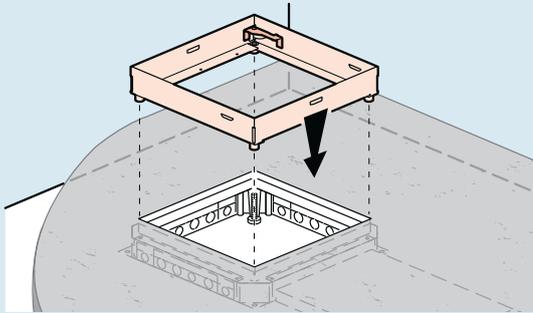


Place the trim onto the threaded rods

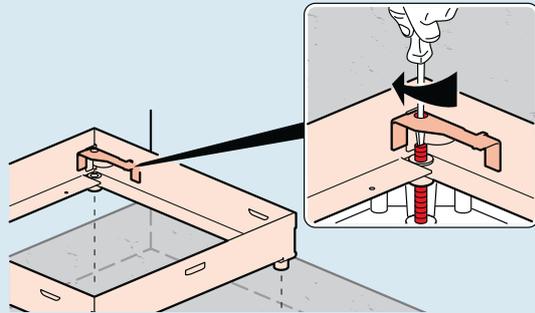


Make a rough adjustment to finished floor level by turning threaded rods in each corner with a screw driver

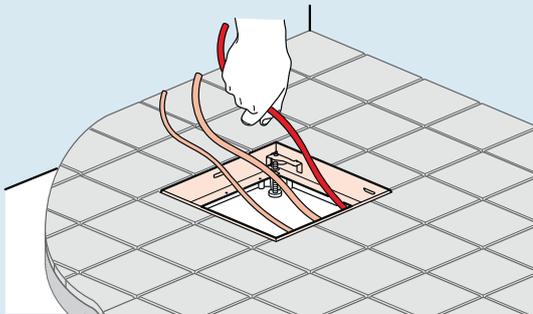


Cable the system

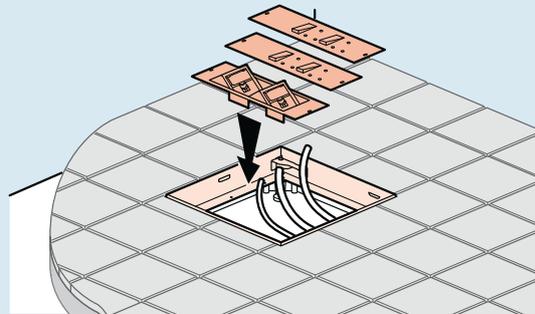

Tiling should be carried out at this stage

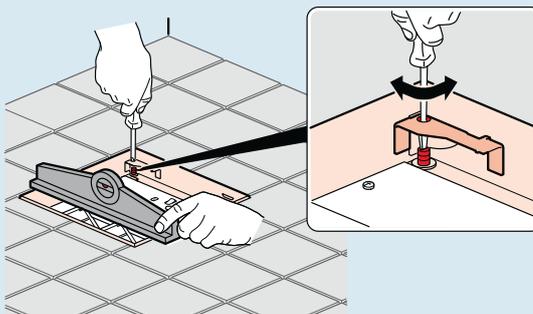

Make final adjustment to finished floor level by turning threaded rods in each corner with a screw driver

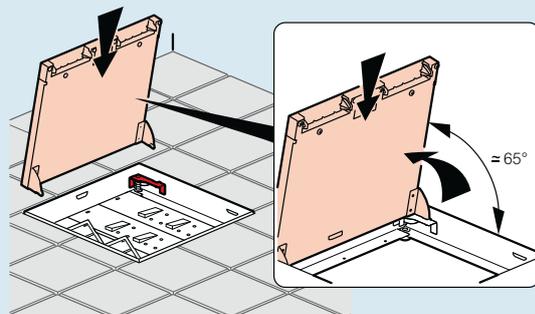

Push the lid back in place by holding it under an angle of approximately 65°

heavy duty in-screed floor box


IP 66, for screed floor



0896 34 + 0896 83 + 0896 85



0896 34 + 0896 83 + 0896 86 + 0896 87

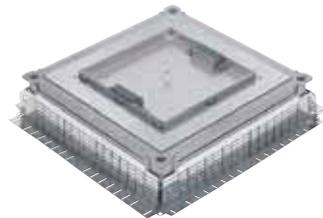

0896 34 + 0896 83 + 0896 88

For highly frequented areas, requiring important mechanical resistance and/or washing down
Conform to standard EN 60-670 and EN 50 085-2-2

Pack	Cat.Nos	Heavy duty in-screed floor box
1	0896 34	Metal in-screed floor box Universal metal in-screed backbox Junction or connection point for concrete floor according to type of cover associated For junction of LV and ELV cabling and/or installation of floor boxes Height adjustable from 105 mm to 140 mm using 4 inserts located in the box corners and a tool adapting to electric drill or screwdriver Bendable side walls for assembling with different sizes of floor raceways Supplied with worksite protection cover to be replaced by blanking cover plate or mounting cover plate Allowing floor covering infill between 6 and 24 mm
1	0896 83	Accessories for metal in-screed floor box Normal load support upto 8KN load with deflection <6 mm
1	0896 84	Heavy load support Up to 20 KN load with deflection <3 mm
1	0896 85	Plates for metal in-screed floor boxes IP 66 plain cover (cover closed) access trap for junction. No cable exit




Pack	Cat.Nos	Heavy duty in screed floor box with cable exit
1	0896 34	Metal in-screed floor box Universal metal in-screed backbox Junction or connection point for concrete floor according to type of cover associated For junction of LV and ELV cabling and/or installation of floor boxes Height adjustable from 105 mm to 140 mm using 4 inserts located in the box corners and a tool adapting to electric drill or screwdriver Bendable side walls for assembling with different sizes of floor raceways Supplied with worksite protection cover to be replaced by blanking cover plate or mounting cover plate Allowing floor covering infill between 6 and 24 mm
1	0896 83	Accessories for metal in screed floor box Normal load support upto 8KN load with deflection <6 mm
1	0896 84	Heavy load support up to 20 KN load with deflection <3 mm
1	0896 86	Plates for metal in-screed floor boxes Ip 66 plate (cover closed and plugs not connected) with central cable exit
1	0896 87	Cable exit accessory for IP66 cover plate Cat.No 0896 86

heavy duty in-screed floor box

■ Metal in-screed floor box, installation principle


When used as junction box

Junction box with plain cover Cat.No 0896 85

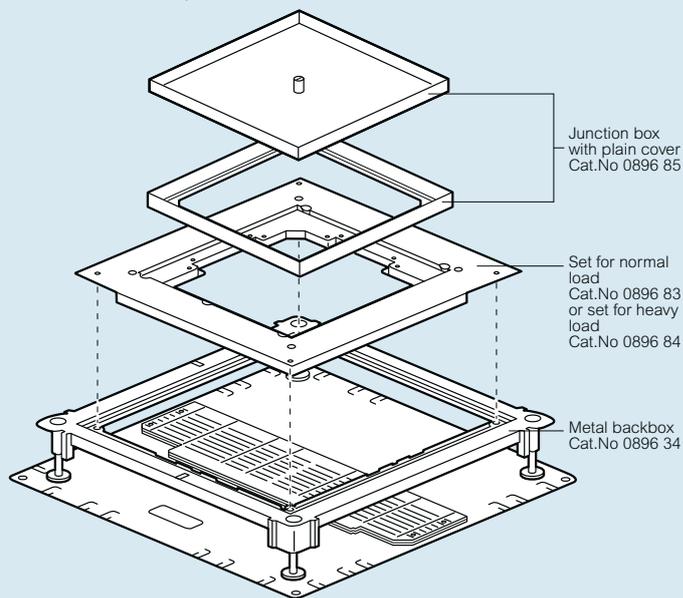

When used as floor box for wiring accessories

Floor box with central cable Cat.No 0896 86

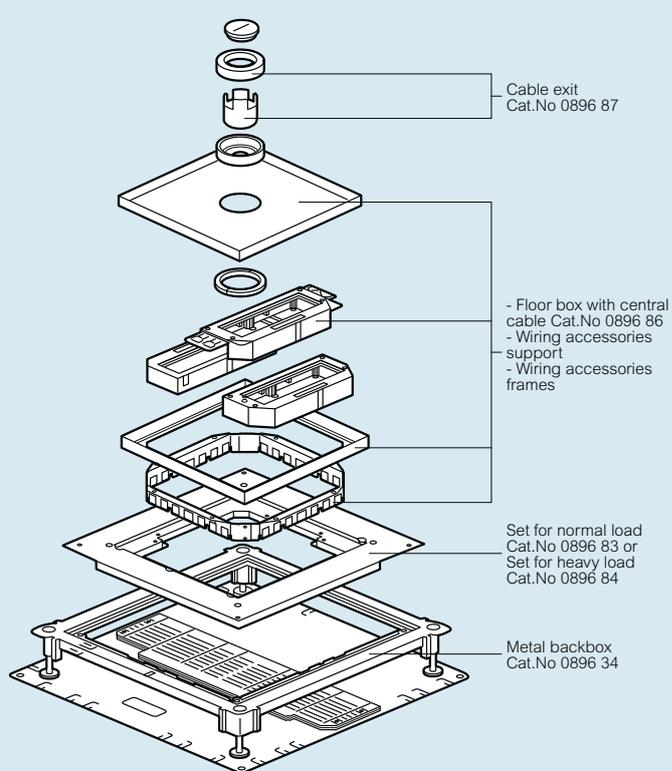

NEW

floor access unit for raised floors




0893 07


Pack	Cat.Nos	Access master box
1/10	0893 07	<p>Circular floor box that can be used as a simple access to the floor void</p> <p>IP 20 - IK 08</p> <p>Box made of 2 parts : aluminium and polyester with neoprene joint 3 Ø 20 mm outgoing Dimensions : Ø 145 mm x 60 mm depth Cut-out dimensions : Ø 127 mm Frame dimensions : Ø 144 mm The specially designed rubber jaws keep the cables secure and prevents accidental disconnection Cabling / conduit not supplied</p>

floor access unit for raised floors


■ Technical data

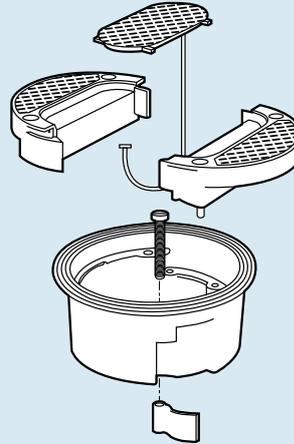


3 piece GRP top, with removable section to allow passage of cables.

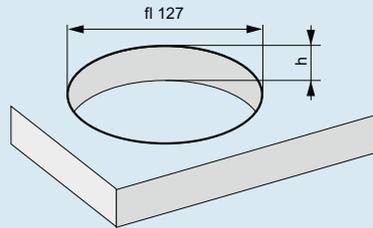

25 mm < h < 50 mm

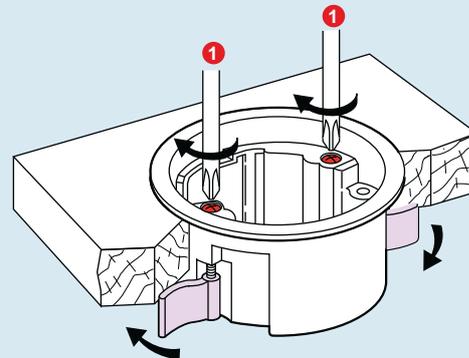

Cable from office multi-outlet extension

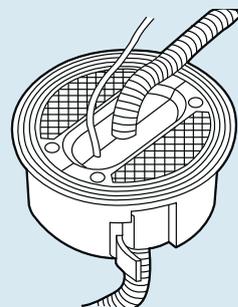

SUSTAINABLE DEVELOPMENT

constructed from galvanized steel tiles and polypropylene supports, Soluflex requires no specialized equipment or labour, no fixing and no glue for installation



A wide range of power and data equipment for answering all needs of offices and commercial building installations: floor boxes, mini-columns, grommets...




HIGH LOAD BEARING:
30 000 N/m²


Perfect compatibility with Legrand's market leading cable management solutions and wiring devices...



4 SUPPORT HEIGHTS
37, 60, 90 120 mm for easy VDI cable installation, Cablofil wire mesh

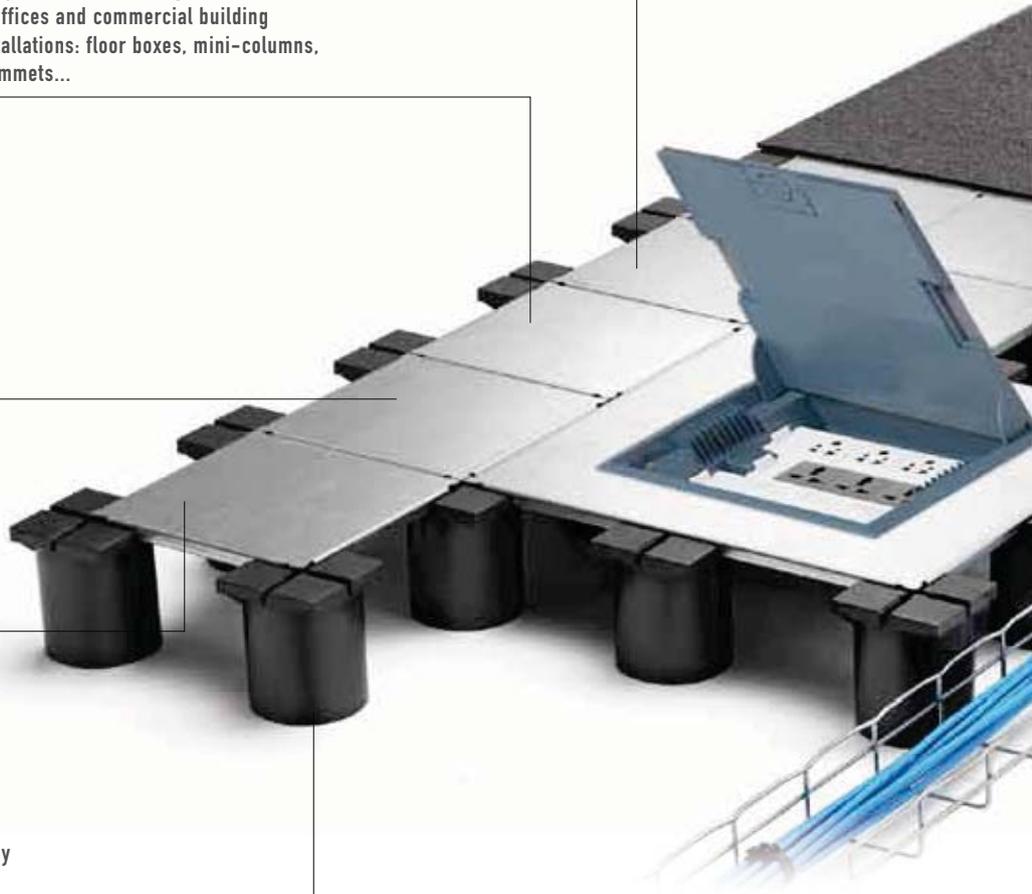

SOLUFLEX CABLE FLOOR SYSTEM QUICK AND EASY TO INSTALL


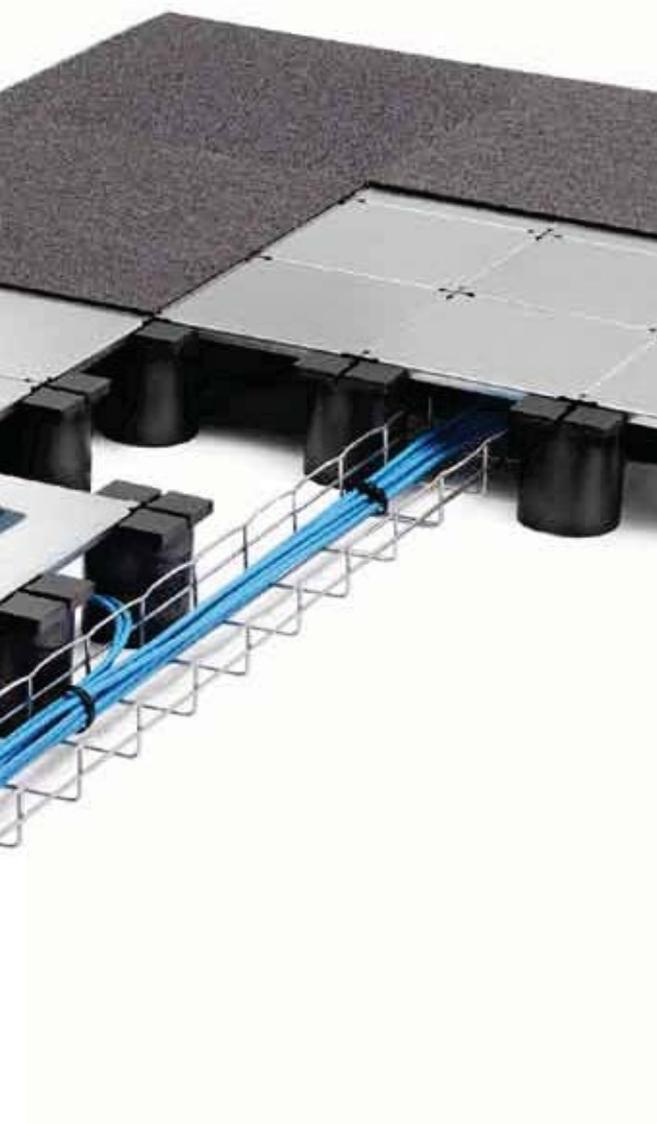




Soluflex is an innovative and time saving low-level raised floor system engineered for ultimate flexibility of the office environment. Perfectly adapted for both renovation and new buildings.

Soluflex creates well-organised, multifunctional rooms to provide users with required number of connection points. It is no longer necessary to decide on connection point location at design stage. Cabling can be carried out anywhere under the entire floor and the location of connections can be determined at any stage. Cablofil wire mesh is a complementary solutions for distributing power and data.

Soluflex cable floor system

selection chart


FLOOR PARTS							
Height (mm)	Tile	Support	Double edge plate	Single edge plate	Plenum sealing	Plenum exterior angle	
							
37	84000 10	84037 00	84000 60	84000 61	84037 20	84037 30	
60	84000 10	84060 00	84000 60	84000 61	84060 20	84060 30	
90	84000 10	84090 00	84000 60	84000 61	84090 20	84090 30	
120	84000 10	84120 00	84000 60	84000 61	84120 20	84120 30	
EQUIPMENT - to be equipped with Arteor mechanisms							
Height (mm)	Built-in power unit	Built-in data unit	Fully submerged power unit	Fully submerged data unit			
							
37	84037 50	84037 51					
60			84060 72	84060 73			
90							
120							

Ramp	Earthing tile	Cable outlet tile	Chrome outlet grommet	Accessory outlet tile	Fixing bracket
					
84037 40	84000 20	84000 30	81902 32	84000 40	84000 50
84060 40	84000 20	84000 30	81902 32	84000 40	84000 50
84090 40	84000 20	84000 30	81902 32	84000 40	84000 50
84120 40	84000 20	84000 30	81902 32	84000 40	84000 50

Floor boxes		Mini-column	
Floor box tile	Backbox + lid and trim	Outlet tile	Mini-column
			
3 compartments			
		84000 40	p. 101
84090 82	p. 14		
84090 82	p. 14		

Soluflex cable floor system

37 mm height

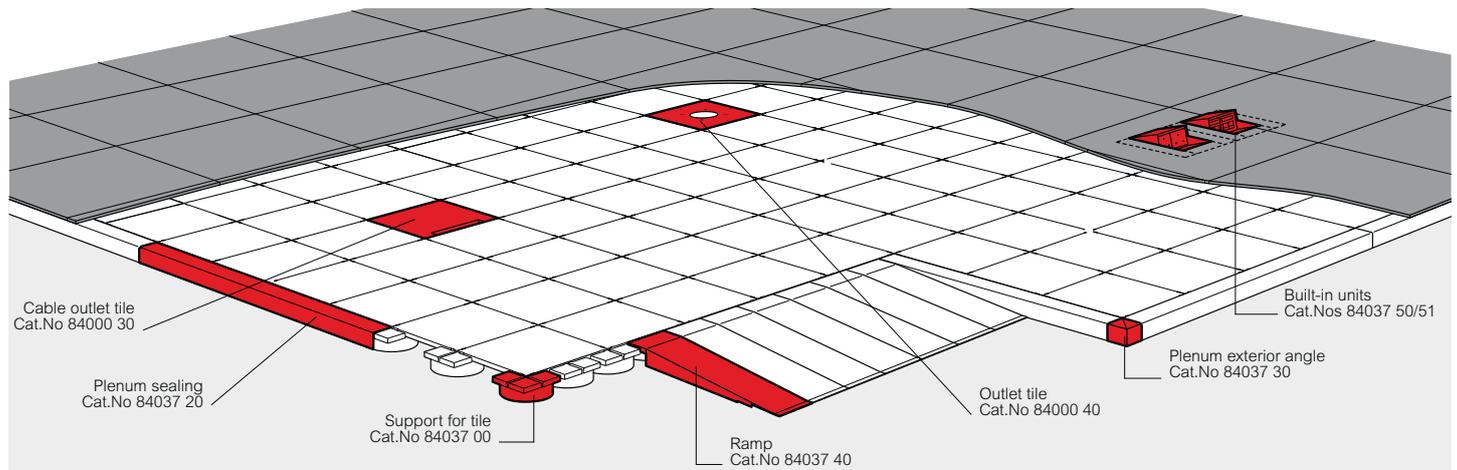


Selection chart (p. 26-27)
 Technical characteristics & dimensions (p. 32-34)

Floor tiles manufactured from Pre-galvanised sheet, steel in accordance with BS EN 10326
 Dimensions of Tile 225mm x 225mm
 The supports are made of polypropylene. inflammability class B2 according to DIN 4102
 4 different heights: 37 mm, 60 mm, 90 mm, 120 mm
 Weight of the Soluflex cable floor system: approx. 20 kg per m²
 Thickness: 2 mm

Pack	Cat.Nos	Floor parts	Pack	Cat.Nos	Floor parts (continued)
1	84000 10	Tile Supplied with 4 contact/distance projections Can be positioned on supports Cat.No 84037 00	1	81902 32	Chromed outlet grommet For cable access to work station To be used with outlet tile Cat.No 84000 40
1	84037 00	Support for tile 100 x 100 mm support Height 37 mm With 2 grooves for tiles positioning Black - polypropylene	1	84000 40	Outlet tile Supplied with 4 contact/distance projections For integration of columns, pedestals+cable spine or chrome outlet grommet Cat.No 81902 32
1	84000 60	Edge plates Used to finish installation against wall Length 900 mm, width 300 mm Trim to size on site	1	84000 50	Fixing brackets For mounting columns on floor with outlet tile Cat.No 84000 40
1	84000 61	Double edge plate 2 flanges of 13 mm	1	84037 50	Built-in units to be equipped 225 x 225 mm Height 37 mm (accessory outlet rises to 71 mm)
1	84037 20	Single edge plate 1 flange of 13 mm	1	84037 51	For 2 x 2 module Arteor power sockets Provided with connection terminal
1	84037 30	Plenum sealing For edging the floor to create a step Length 900 mm, width 56 mm Height 37 mm	1	84037 51	For up to 4 x 1 module Arteor data sockets
1	84037 40	Plenum exterior angle 56 x 56 mm	1	0535 98	Cable worm 2 compartments: power and data Length: 0.75m Colour: white
1	84037 40	Ramp Length 400 mm, width 112 mm Ramp 10 % Include 1 extra support per tile			
1	84000 20	Earthing tile Supplied with 4 contact/distance projections Earthing clamp max. 6 mm ² Use 1 tile per 100 m ² or in hallways max. 14 m apart			
1	84000 30	Cable outlet tile For cable access to work station Access 125 x 15 mm Supplied with 4 contact/distance projections			

Soluflex cable floor system

60 mm height

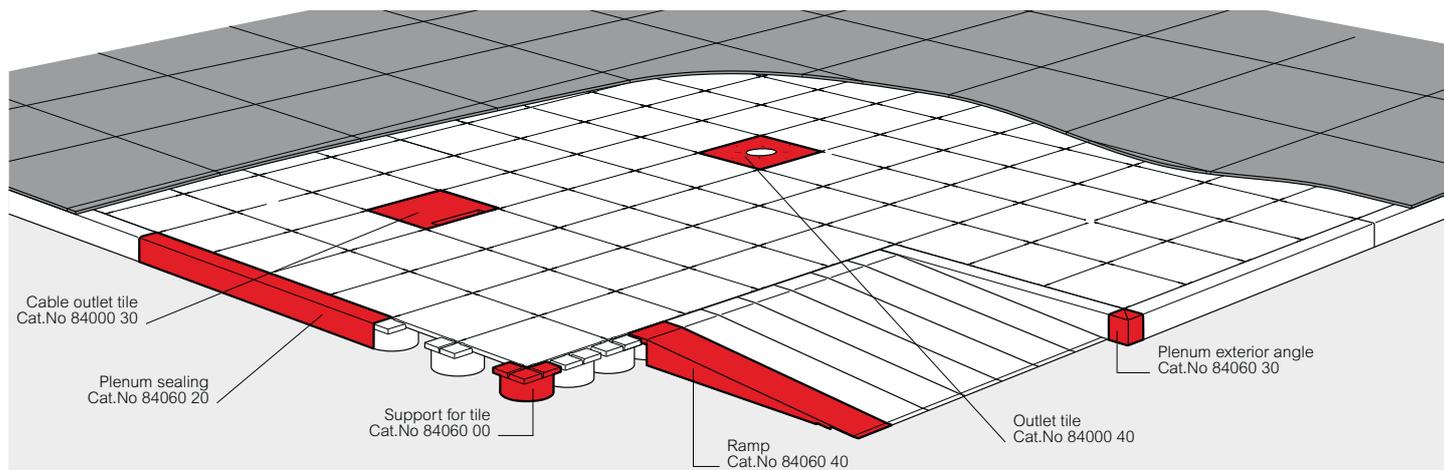


Selection chart (p. 26-27)
 Technical characteristics & dimensions (p. 32-34)

Floor tiles manufactured from pre-galvanised sheet, steel in accordance with BS EN 10326
 Dimensions of tile 225m x 225m
 The supports are made of polypropylene. inflammability class B2 according to DIN 4102
 4 different heights: 37 mm, 60 mm, 90 mm, 120 mm
 Weight of the Soluflex cable floor system: approx. 20 kg per m²
 Thickness: 2 mm

Pack	Cat.Nos	Floor parts		Pack	Cat.Nos	Floor parts (continued)	
1	84000 10	Tile Supplied with 4 contact/distance projections Can be positioned on supports Cat.No 84060 00		1	81902 32	Chromed outlet grommet For cable access to work station To be used with outlet tile Cat.No 84000 40	
1	84060 00	Support for tile 100 x 100 mm support Height 60 mm With 2 grooves for tiles positioning Black - polypropylene		1	84000 40	Outlet tile Supplied with 4 contact/distance projections For integration of columns, pedestals + cable spine or chrome outlet grommet Cat.No 81902 32	
1	84000 60	Edge plates Used to finish installation against wall Length 900 mm, width 300 mm Trim to size on site		1	84000 50	Fixing brackets For mounting columns on floor with outlet tile Cat.No 84000 40	
1	84000 61	Double edge plate 2 flanges of 13 mm		1	84060 72	Fully submerged units to be equipped To be combined with cable outlet tile Cat.No 84000 30	
1	84060 20	Single edge plate 1 flange of 13 mm		1	84060 73	For 2 x 2 module Arteor power socket Provided with connection terminal	
1	84060 20	Plenum sealing For edging the floor to create a step Length 900 mm, width 56 mm Height 60 mm		1	0535 98	For 4 x 1 module Arteor data sockets	
1	84060 30	Plenum exterior angle 56 x 56 mm		1		Cable worm 2 compartments: power and data Length: 0.75m Colour: white	
1	84060 40	Ramp Length 616 mm, width 112 mm Ramp 10 % Include 1 extra support per tile					
1	84000 20	Earthing tile Supplied with 4 contact/distance projections Earthing clamp max. 6 mm ² Use 1 tile per 100 m ² or in hallways max. 14 m apart					
1	84000 30	Cable outlet tile cable outlet tile For cable access to work station Access 125 x 15 mm Supplied with 4 contact/distance projections					

Soluflex cable floor system

90 mm height

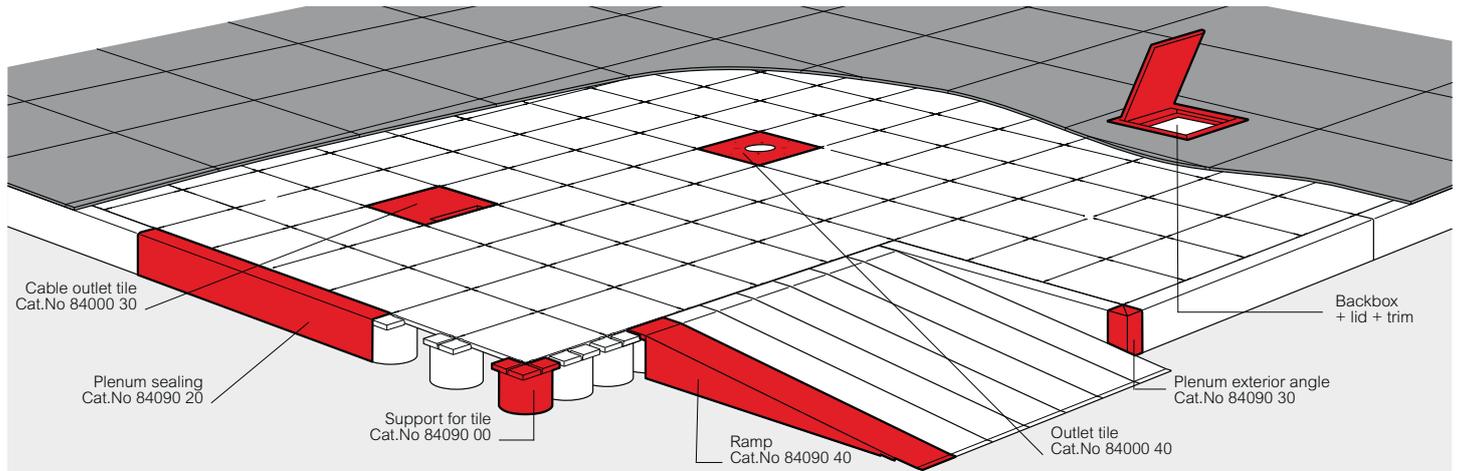

Selection chart (p. 26-27)
 Technical characteristics & dimensions (p. 32-34)


Floor tiles manufactured from pre-galvanised sheet, steel in accordance with BS EN 10326
 Dimensions of tile 225mm x 225mm
 The supports are made of polypropylene. inflammability class B2 according to DIN 4102
 4 different heights: 37 mm, 60 mm, 90 mm, 120 mm
 Weight of the Soluflex cable floor system: approx. 20 kg per m²
 Thickness: 2 mm

Pack	Cat.Nos	Floor parts	Pack	Cat.Nos	Floor parts (continued)
1	84000 10	Tile Supplied with 4 contact/distance projections Can be positioned on supports Cat.No 84090 00	1	81902 32	Chromed outlet grommet For cable access to work station To be used with outlet tile Cat.No 84000 40
1	84090 00	Support for tile 100 x 100 mm support Height 90 mm With 2 grooves for tiles positioning Black - polypropylene	1	84000 40	Outlet tile Supplied with 4 contact/distance projections For integration of columns, pedestals+ cable spine or chrome outlet grommet Cat.No 81902 32
1	84000 60	Edge plates Used to finish installation against wall Length 900 mm, width 300 mm Trim to size on site	1	84000 50	Fixing brackets For mounting columns on floor with outlet tile Cat.No 84000 40
1	84000 61	Double edge plate 2 flanges of 13 mm	1	84090 82	Floor box tile 450 x 450 mm For lid + trim assemblies
1	84090 20	Single edge plate 1 flange of 13 mm	1	0535 98	For 3-compartment floor boxes (square opening 265 x 265 mm) Cable worm 2 compartments: power and data Length: 0.75m Colour: white
1	84090 20	Plenum sealing For edging the floor to create a step Length 900 mm, width 56 mm Height 90 mm			
1	84090 30	Plenum exterior angle 56 x 56 mm			
1	84090 40	Ramp Length 898 mm, width 112 mm Ramp 10 % Include 1 extra support per tile			
1	84000 20	Earthing tile Earthing tile Supplied with 4 contact/distance projections Earthing clamp max. 6 mm ² Use 1 tile per 100 m ² or in hallways max. 14 m apart			
1	84000 30	Cable outlet tile For cable access to work station Access 125 x 15 mm Supplied with 4 contact/distance projections			

Backboxes for raised floors (p. 14)

Soluflex cable floor system

120 mm height

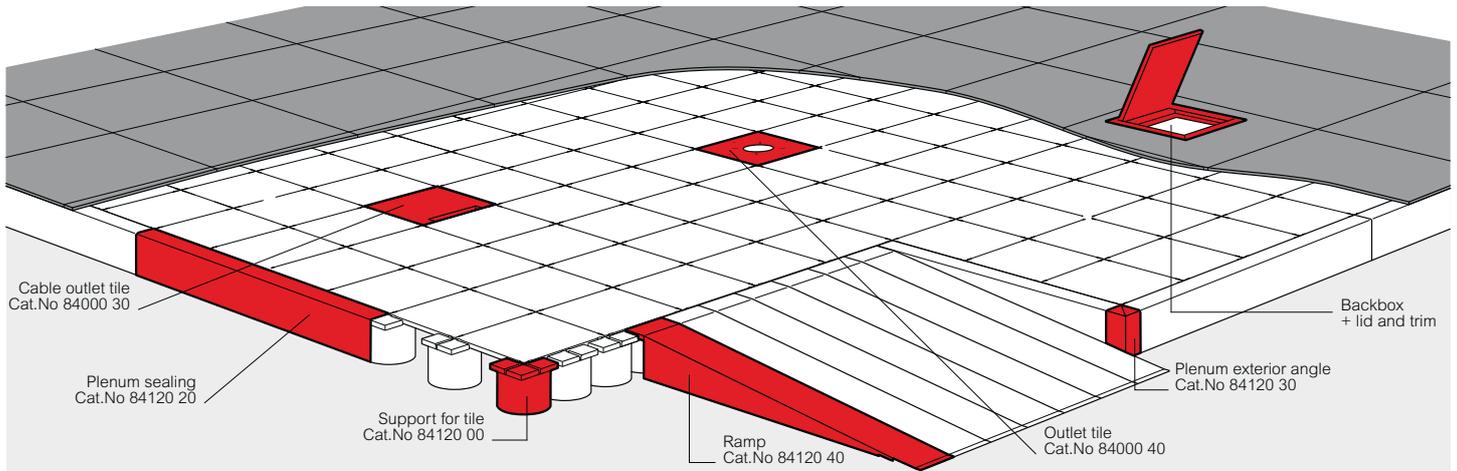

Selection chart (p. 26-27)
 Technical characteristics & dimensions (p. 32-34)

Floor tiles manufactured from pre-galvanised sheet, steel in accordance with BS EN 10326
 Dimensions of tile 225m x 225m
 The supports are made of polypropylene. inflammability class B2 according to DIN 4102
 4 different heights: 37 mm, 60 mm, 90 mm, 120 mm
 Weight of the Soluflex cable floor system: approx. 20 kg per m²
 Thickness: 2 mm

Pack	Cat.Nos	Floor parts	Pack	Cat.Nos	Floor parts (continued)
1	84000 10	Tile Supplied with 4 contact/distance projections Can be positioned on supports Cat.No 84120 00	1	81902 32	Chromed outlet grommet For cable access to work station To be used with outlet tile Cat.No 84000 40
1	84120 00	Support for tile 100 x 100 mm support Height 120 mm With 2 grooves for tiles positioning Black - polypropylene	1	84000 40	Outlet tile Supplied with 4 contact/distance projections For integration of columns, pedestals+cable spine or chrome outlet grommet Cat.No 81902 32
1	84000 60	Edge plates Used to finish installation against wall Length 900 mm, width 300 mm Trim to size on site	1	84000 50	Fixing brackets For mounting columns on floor with outlet tile Cat.No 84000 40
1	84000 61	Double edge plate 2 flanges of 13 mm	1	84090 82	Floor box tile 450 x 450 mm For lid + trim assemblies
1	84120 20	Single edge plate 1 flange of 13 mm	1	0535 98	Cable worm 2 compartments: power and data Length: 0.75m Colour: white
1	84120 20	Plenum sealing For edging the floor to create a step Length 900 mm, width 56 mm Height 120 mm			
1	84120 30	Plenum exterior angle 56 x 56 mm			
1	84120 40	Ramp Length 1181 mm, width 112 mm Ramp 10 % Include 1 extra support per tile			
1	84000 20	Earthing tile Supplied with 4 contact/distance projections Earthing clamp max. 6 mm ² Use 1 tile per 100 m ² or in gangways max. 14 m apart			
1	84000 30	Cable outlet tile For cable access to work station Access 125 x 15 mm Supplied with 4 contact/distance projections			

Backboxes for raised floors (p. 14)

Soluflex cable floor system

■ Technical details

Material

- The floor tiles are made of pregalvanised steel, according to EN 10326.
- The supports are made of recycled polypropylene. Inflammability class B2 according to DIN4102

■ Weights and measures

- Dimensions of tiles: 225x225mm.
- Available in four different heights: 37, 60, 90 and 120 mm.
- Weight of the Soluflex® cable floor system, approx 20 kg/m².
- Tile thickness : 2 mm

■ Load bearing data

- Point load per tile/support: 1500 Newton/25 mm²
- Equal divided load of 30000 N per m²
- Minimum safety factor: $V = 1.71$

■ Acoustic characteristics

• Flanking air sound insulation in accordance with ISO 717-1: 1996. Tested according to ISO 140-12:2000

Soluflex® cable floor system without mineral wool underneath the partition wall: 48 dB.

Soluflex® cable floor system with mineral wool underneath the partition wall: 60dB.

• Vertical impact sound insulation improvement in accordance with ISO 140-12:2000

Soluflex® cable floor system with carpet and without mineral wool underneath the partition wall: $L_{n,F,w} = 49$ dB.

Soluflex® cable floor system with carpet and with mineral wool underneath the partition wall: $L_{n,f,w} = 39$ dB.

• Vertical impact sound level of a floor finish in accordance with ISO. The improvement in sound proofing is measured in the underlying floor.

Impact sound insulation of a floor finish according to ISO 717-2:1996.

Tested according to ISO 140-6:1998

Concrete floor 140mm + Soluflex

$\Delta L_w = 17$ dB

$\Delta L_{lin} = 7$ dB

Concrete floor 140 mm + Soluflex + carpet tiles

$\Delta L_w = 24$ dB

$\Delta L_{lin} = 12$ dB

■ Safety

- Safety against short circuits : Soluflex is earthed (as long as 1 earthing tile is installed per 100 m²)
- Fire resistance: due to its low plenum height Soluflex is self-extinguishing
Tested according to BS EN 13501-1, class B (fl) S1

■ TNO-fire

Fire propagation

Its low plenum height enables the cable floor system to be self-extinguishing

EN 13501-1

B(fl) S1

NEN 1775

A - Inflammability - complies with the class T1 criteria for inflammability

B - Horizontal fire propagation: all heights
maximum horizontal fire propagation = 0 cm, which implies a critical density of heat flow of more than 11 kW/m²
Classification according to NEN 1775: Class T1

NEN 6066

With (highest) heat flow supply of 50 kW/m² :
(highest) normative smoke density smaller than 0.5 m⁻¹, which is very little smoke production in case of fire

DIN 4102

Resistance to fire in accordance with DIN 4102 Class B1

■ Level floor

The sub-floor must be dry, clean and level, suitable for laying carpet. If the floor is not level, it must be levelled before you start to install the Soluflex cable floor system. Please contact your floor specialist for professional advice

■ KEMA-certificate

Soluflex cable floor system has been certified by KEMA and meets the requirements for mechanical and electrical safety

■ Earthing

The cable floor system is automatically earthed, provided that 1 earthing tile is installed per 100 m². Install an earthing tile every 14 m length in gangways


■ Other features

- The sub-floor should be dry, clean and levelled, suitable for carpeting.
- The cable floor system feels steady. Since the floor is not adjustable in height, it needs no later adjustment.
- The diagonal structure of the Soluflex floor means the cables are perfectly parallel, and you can cross data cables at the required angle of 90°.


Soluflex cable floor system

■ Dimensions

Tile Cat.No 84000 10

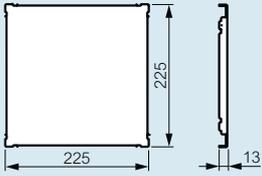


Support




Cat.Nos	H (mm)
84037 00	35
84060 00	58
84090 00	88
84120 00	118


Double edge plate Cat.No 84000 60

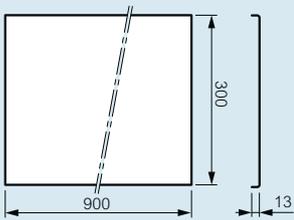

Single edge plate Cat.No 84000 61

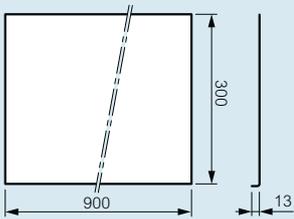


Plenum sealing

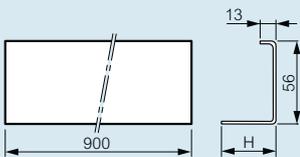


Cat.Nos	H (mm)
84037 20	37
84060 20	60
84090 20	90
84120 20	120

Plenum exterior angle

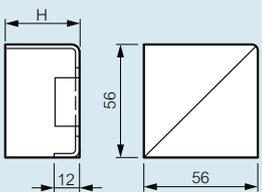


Cat.Nos	H (mm)
84037 30	37
84060 30	60
84090 30	90
84120 30	120

Ramp

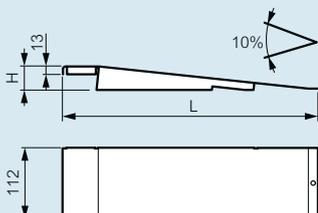


Cat.Nos	H (mm)	L (mm)
84037 40	37	400
84060 40	60	616
84090 40	90	898
84120 40	120	1181


Earthing tile Cat.No 84000 20

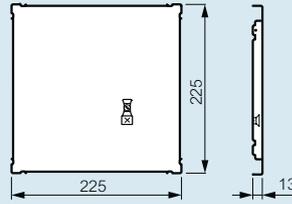


Cable outlet tile Cat.No 84000 30

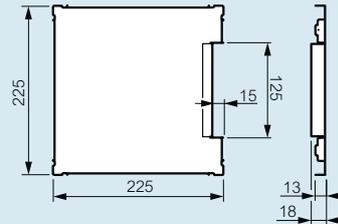


Chrome outlet grommet Cat.No 81902 32



Outlet tile Cat.No 84000 40

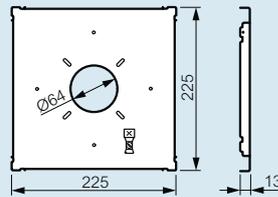


Fixing bracket Cat.No 84000 50




Soluflex cable floor system

■ Dimensions


Built-in Arteor unit for 37 mm height cable floor system

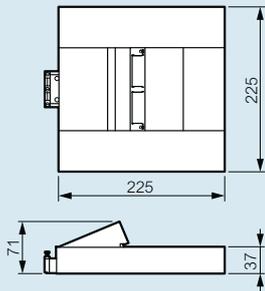


Fully submerged Arteor power unit 2 x 240 V for 60 mm height cable floor system (empty)

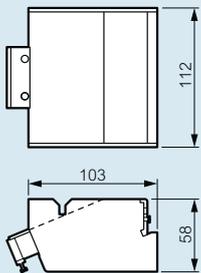

Fully submerged Arteor data unit 2 x 2 data for 60 mm height cable floor system (empty)

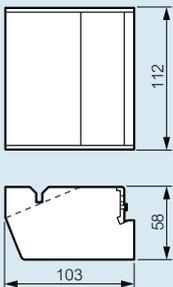

Floor box tile

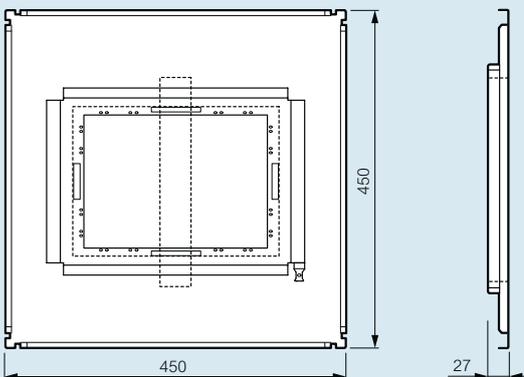


Soluflex cable floor system

accessory installation

■ Installation


With mini-column

Power pole with accessory outlet tile and fixing bracket

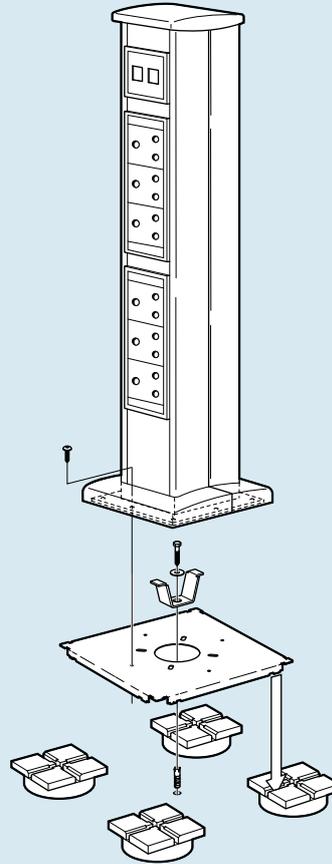


For 37 mm height cable floor system

Positioning of power outlet units

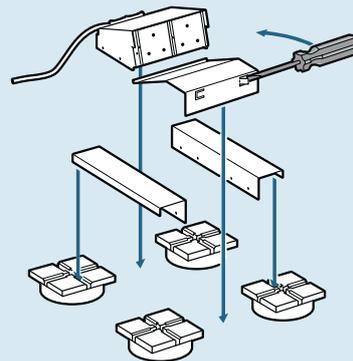

Positioning of data outlet units

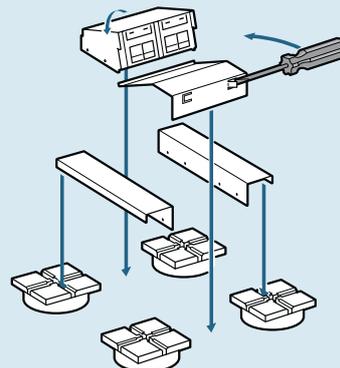


Soluflex cable floor system

accessory installation


■ Installation (continued)

For 60 mm height cable floor system

Submerged Arteor power unit with cable outlet tile

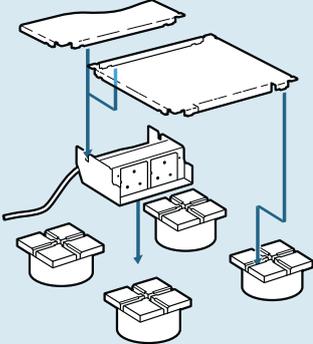


Fully submerged Arteor data unit with cable outlet

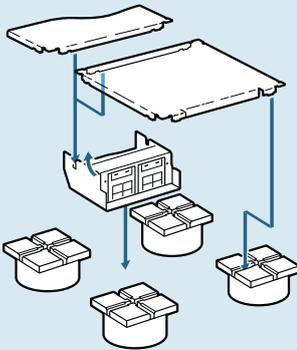

For 90 and 120 mm height cable floor system

Floor box lid and trim with floor box tile

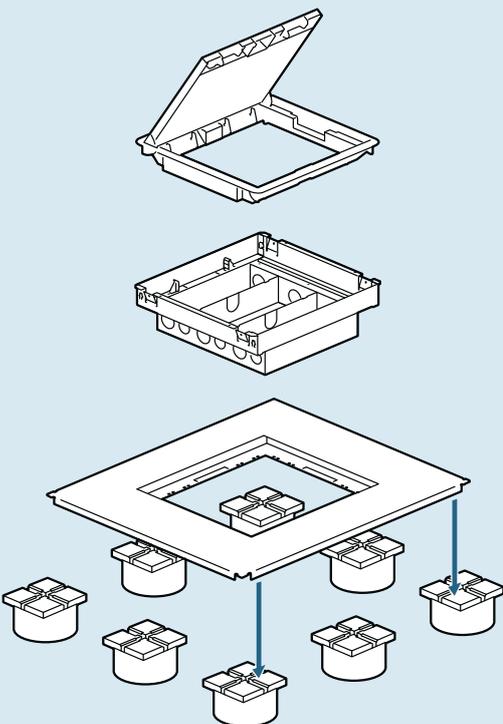

Soluflex cable floor system


■ Installing the Soluflex cable floor system

- Start with a dry, clean and level sub-floor that is suitable for laying normal carpet. If the floor does not meet these requirements, level it first
- Start in the corner of the room and click the tiles into the supports. Leave a 10 mm gap between the wall and tile to allow for expansion. Continue to build the floor like this and cut fitting tiles or edge plates to size for final fitting against the wall
- You are now ready to open the cable routes using your cabling plan. Make sure that the cables are not placed under proposed locations of filing cabinets or other furniture as this limits flexibility
- The corners of the tiles have small recesses to enable them to be lifted using a screwdriver. Once one tile has been removed, the others can be removed by hand
- Now place the power track or cables into the cable routes, taking into account any extra cabling requirements for future flexibility
- By installing more outlet boxes you will be able to realise extra connections without interruption later
- Dependent on the floor height being installed, a choice can be made from various (pre-wired) outlet units in or on the cable floor
- Earth the cable floor system every 100 m² by means of an earthing tile
- In stretched areas such as corridors, place an earthing tile at least every 14 metres
- The electrical installation should always be carried out by a qualified electrician in conjunction with the requirements of the latest wiring regulations
- To create 'islands', install plenum with plenum angles to ensure a neat finishing of the system
- The ramp provides a constant transition from an existing floor to the Soluflex cable floor system
- The entire system can easily be dismantled and installed again as required, giving Soluflex a virtually unlimited life
- The finished installation can then be covered with rubber, stone, wood or carpet tiles
- Finishing with carpet tiles is advised for true flexibility and accessibility of the system

Cable routes



Completed Soluflex installation

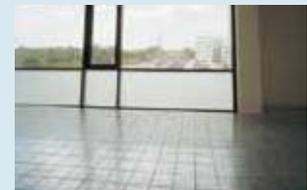

Arteor™ office solutions flexibility

Offices and collective spaces require specific solutions and maximum flexibility: lighting adapted to each situation (meetings, conference, etc.), access security, comprehensive multimedia connections. The Arteor™ range meets all these expectations with perfect adaptability.



Automatic switch



USB



HDMI




Female HD15 + Jack



Multistandard socket



RJ45

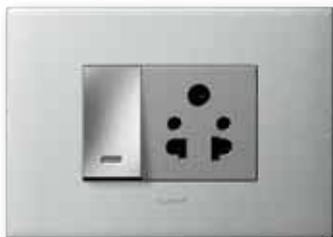


Switch and socket

Soluflex cable floor system



mounting instruction H = 37 mm, 60 mm, 90 mm, 120 mm

Installation data


Total installation

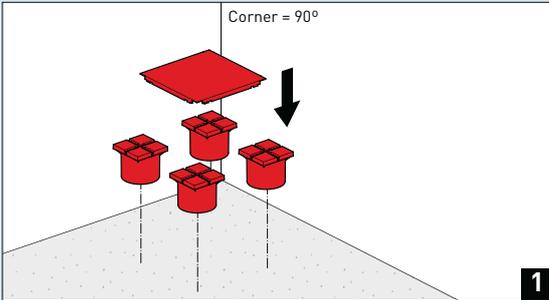


Start in a room with a dry, clean and level subfloor from a square corner and click the tiles into the plastic supports

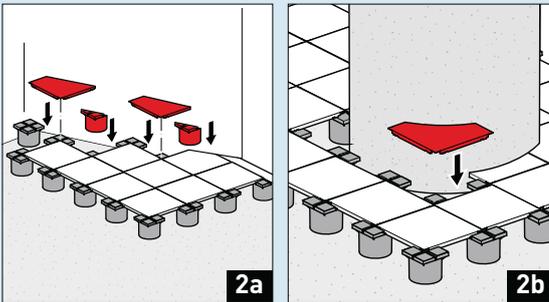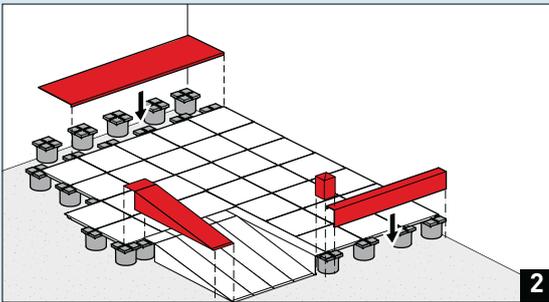


Cut fitting tiles or edge finishing to size

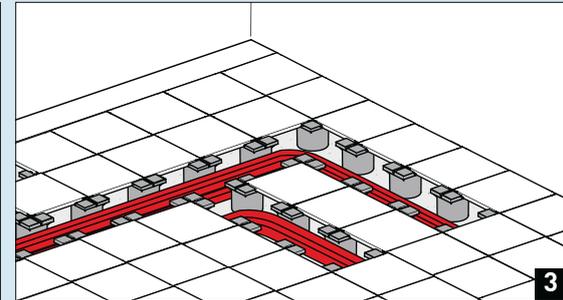


You are now ready for opening the cable routes using a cabling plan. The corners of the tiles have small recesses for lifting them up using, for example, a screwdriver. Remove the other tile by hand

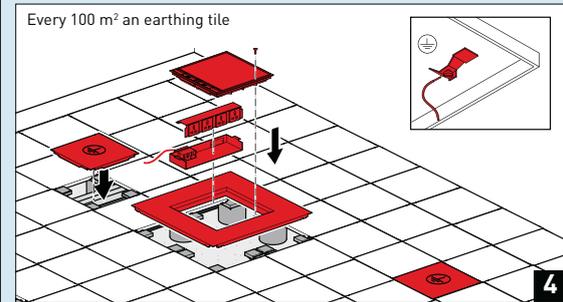

Earthen the cable floor system every 100 m² by means of an earthing tile

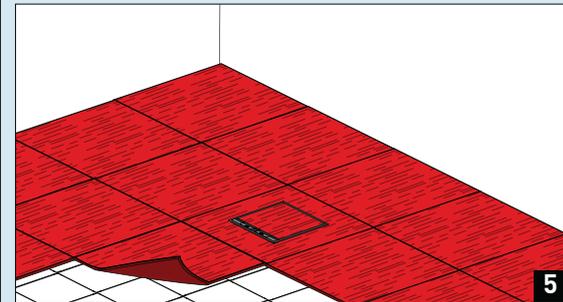

The Soluflex cable floor system can be finished with e.g. carpet tiles










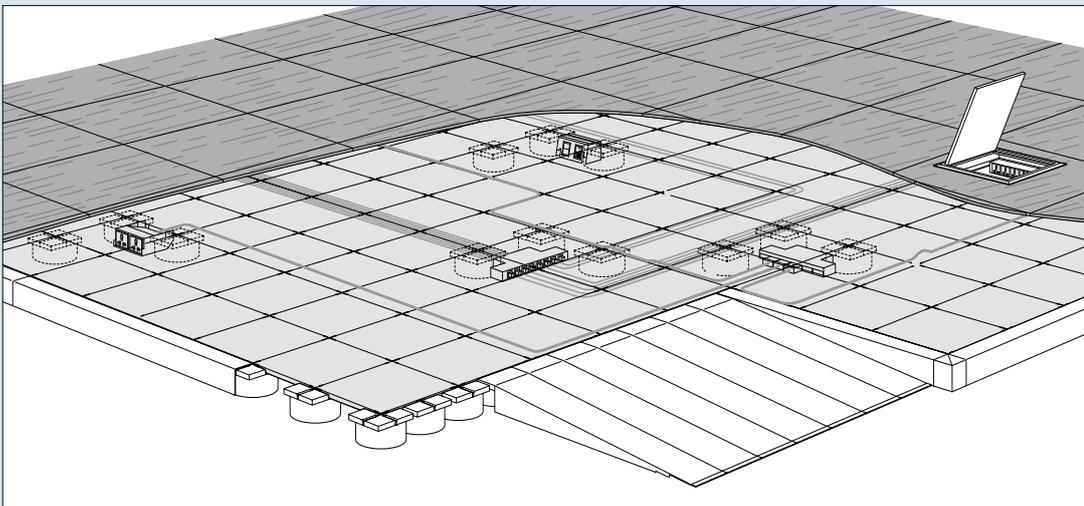


Soluflex cable floor system

mounting instruction service channel H = 37 mm, 60 mm, 90 mm, 120 mm

■ Technical data

Local Installation

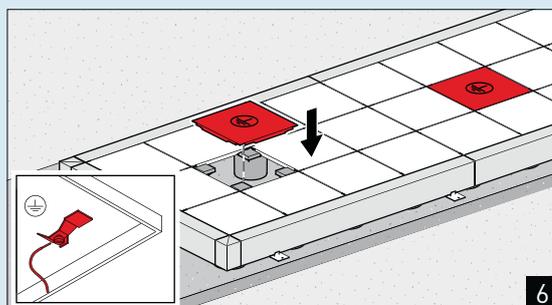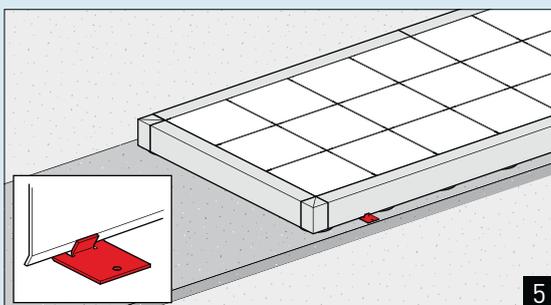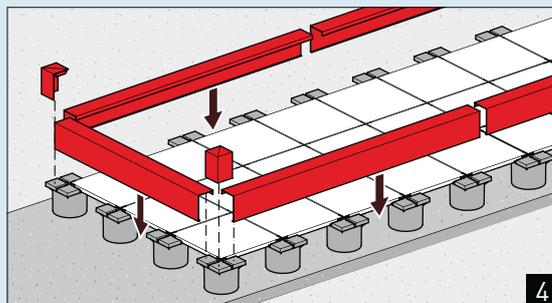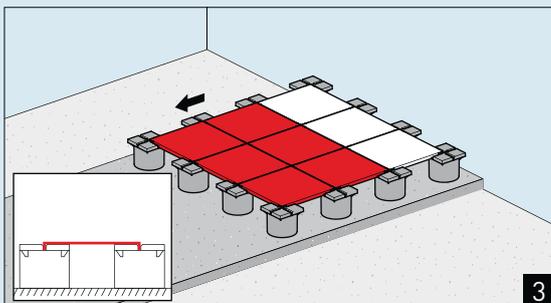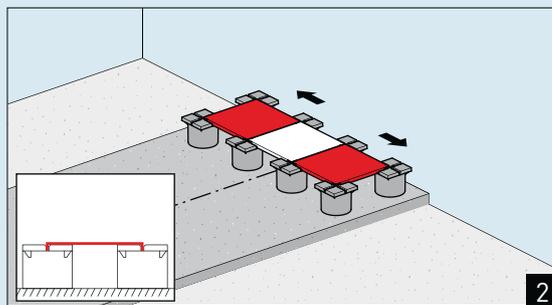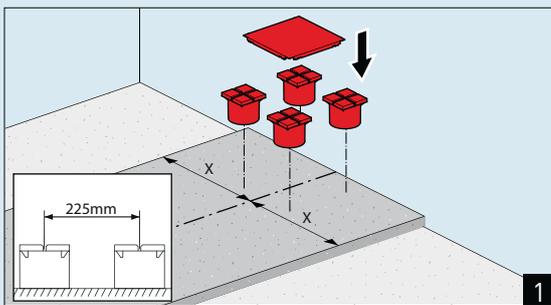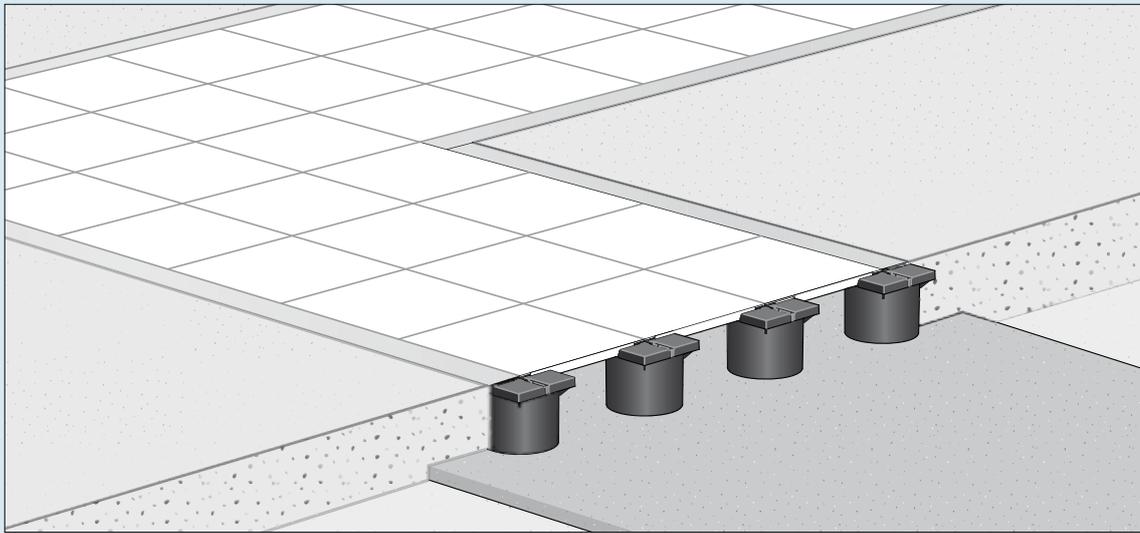

■ Assembly










- Place the Soluflex service channel on a dry, clean and even floor area. Equalize the floor area according to the applicable building regulations. Contact a flooring expert if necessary. A reference sheet is available on request.
- Use fastening clamps, when needed, to make the fitting of the channel more secure (5). The number of clamps needed depends on the length and width of the channel. If you are unsure about this then contact your supplier.
- The use of grounding tiles is compulsory (6). The maximum distance between the tiles is 14 m. Contact the technician about the correct placing.

Soluflex cable floor system

mounting instruction service channel H = 37 mm, 60 mm, 90 mm, 120 mm

■ Technical data

Local Installation

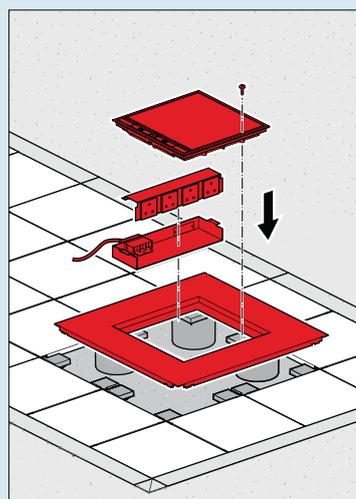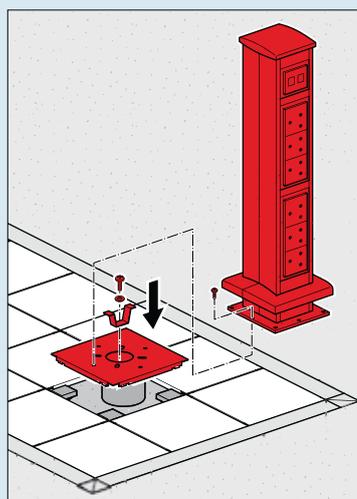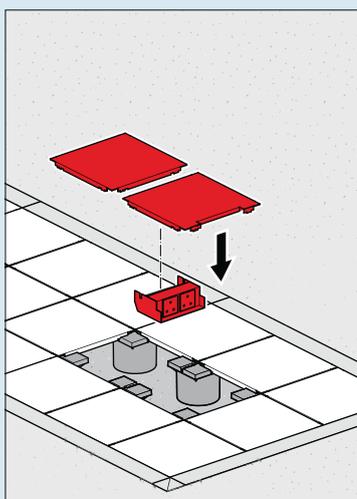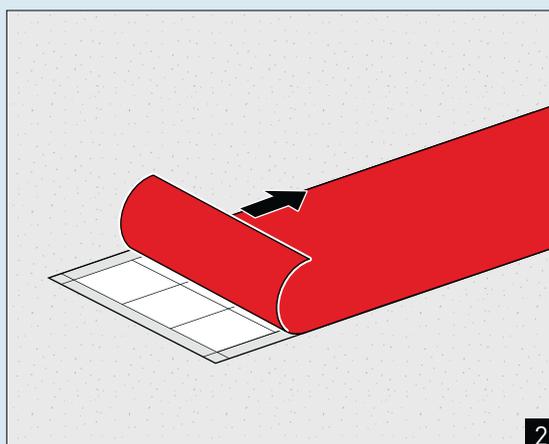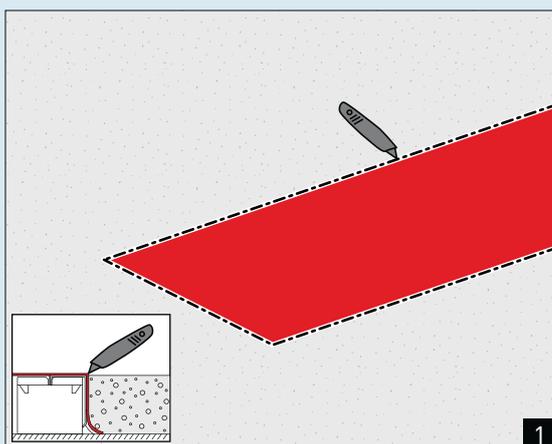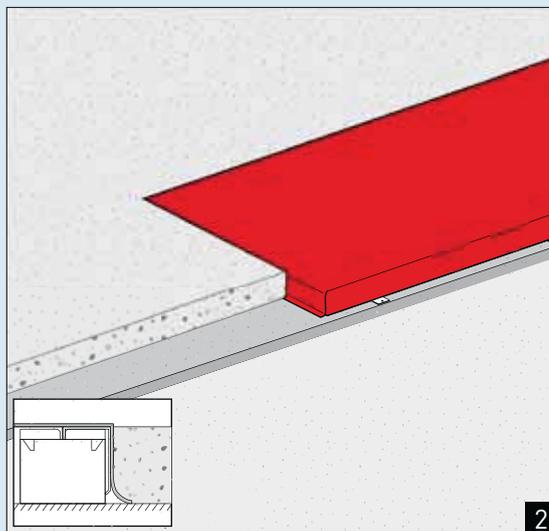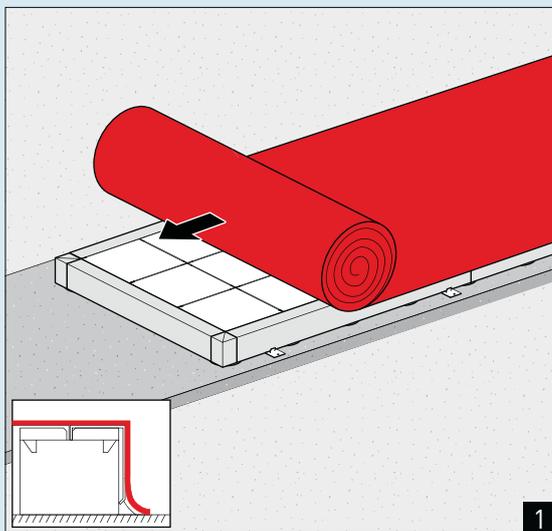


Finishing

- Cover up the channel entirely after assembly. Use only materials that are suitable for building. A list of materials is available on request.
- Before putting on the floor covering, contact a flooring expert.
A reference sheet is available on request.


In use

- Remove the covering material, the service channel is now ready to use. Contact a technician if necessary.

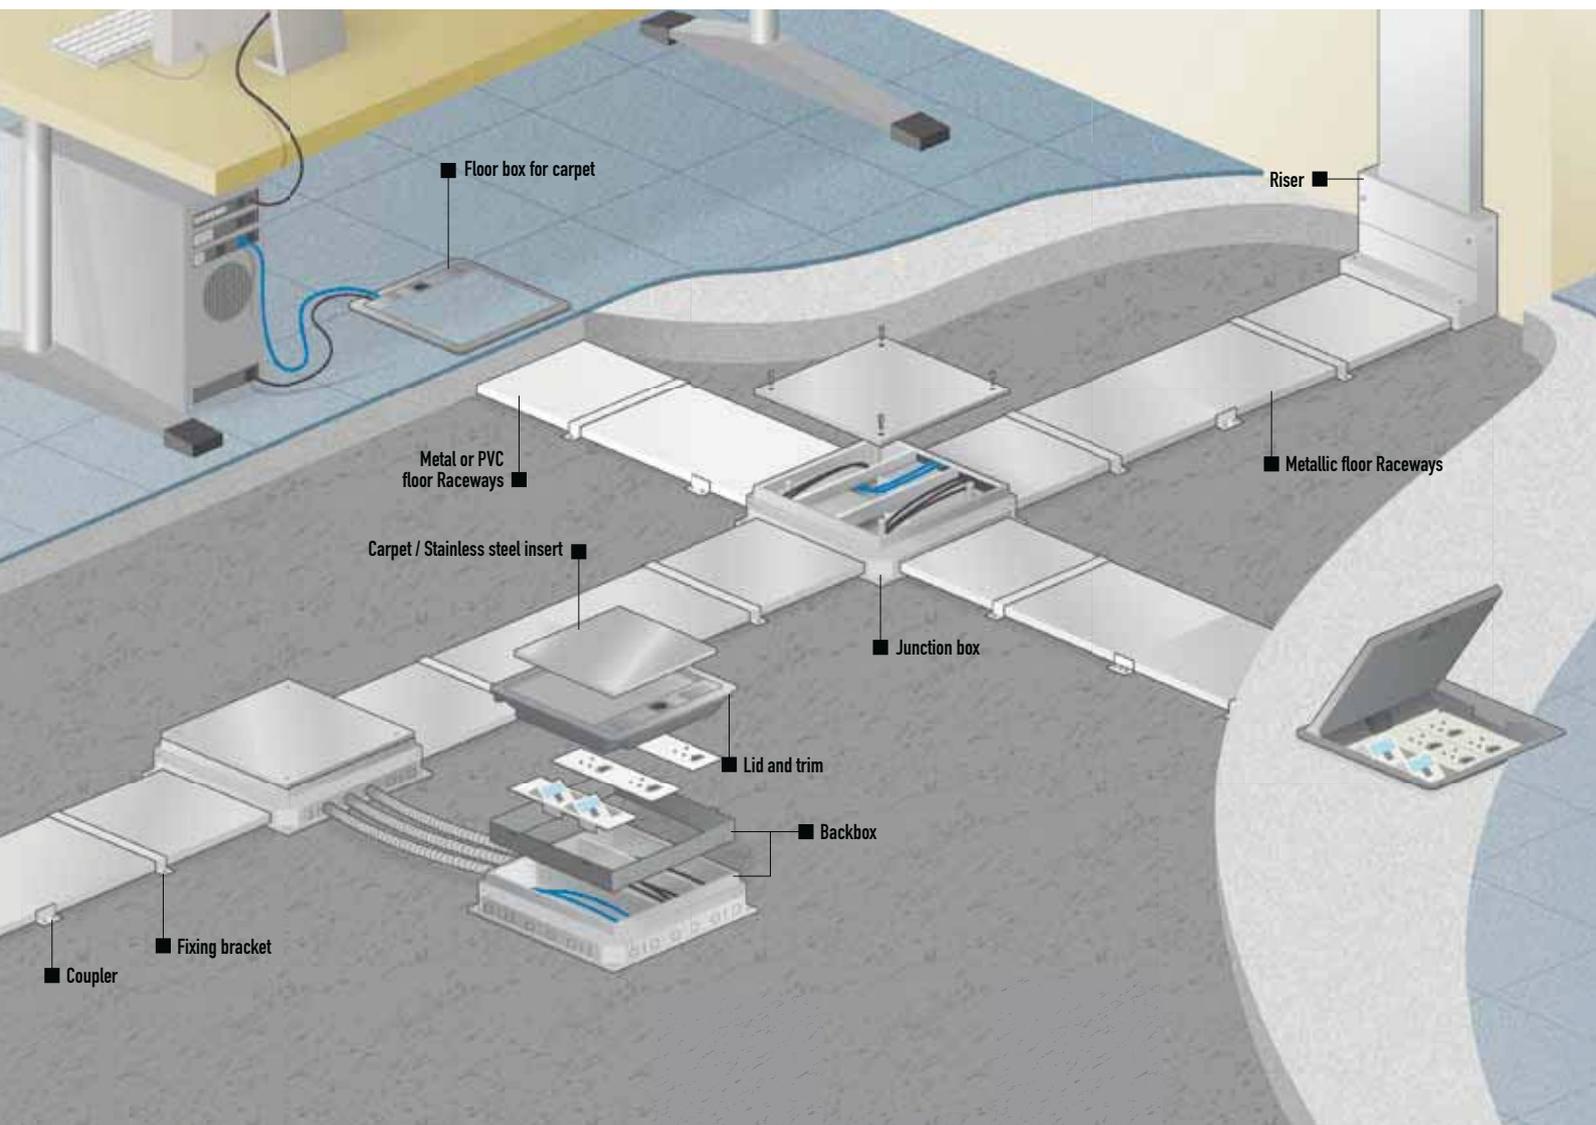

PVC RACEWAYS THE ALTERNATIVE TO METAL SOLUTIONS

Raceways is also available in a PVC version, with 1 or 3 compartments. Wiring capacity can be easily increased on site by clipping together 2 or more Raceways.

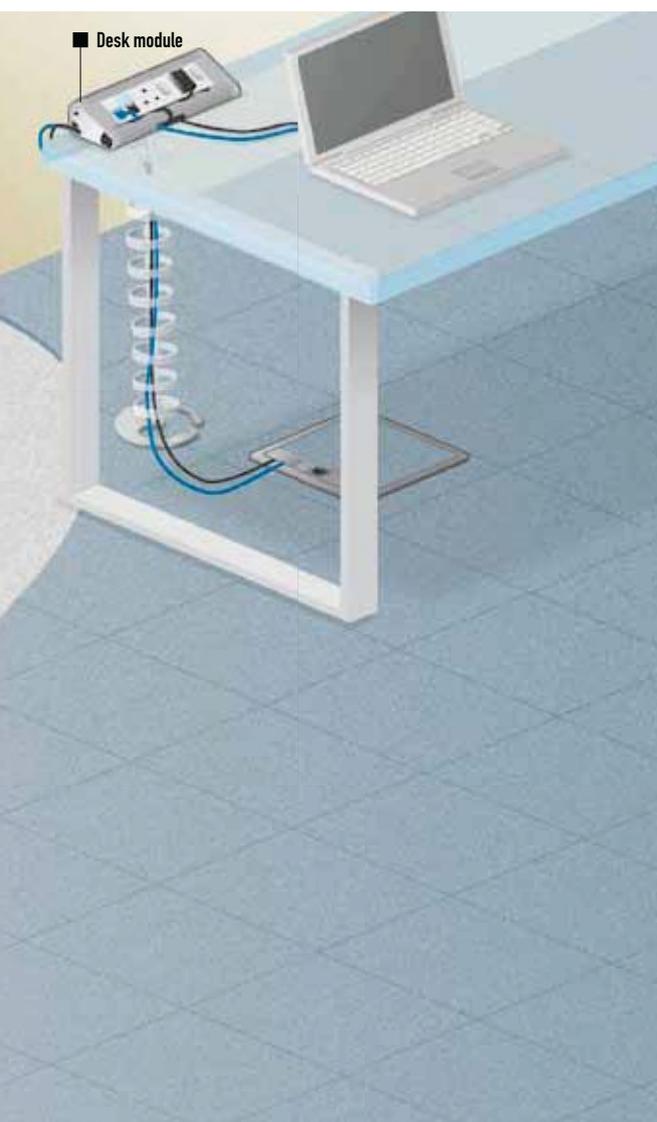

SCREED FLOOR SYSTEMS

Screed PVC and metallic Raceways are a quick and easy way to install power and data distribution throughout screed floors. These systems are particularly robust and are designed to support superior loads. Junction boxes and risers allow easy access when installing cables or for extensions.

All the accessories are compatible with both PVC and metal Raceways.


HEIGHT ADJUSTABLE JUNCTION BOX

for PVC and metal Raceways


OPTIONAL DISPOSABLE SITE PROTECTION COVER
to be removed once the screed is dry.



JUNCTION BOX
allows cables to be accessed at Raceway intersections.
Easier access once the screed has been poured

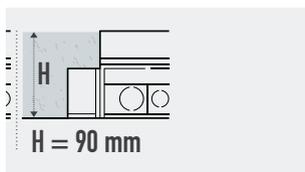

HEIGHT ADJUSTABLE ASSEMBLY
height can be adjusted from 65mm to 90mm

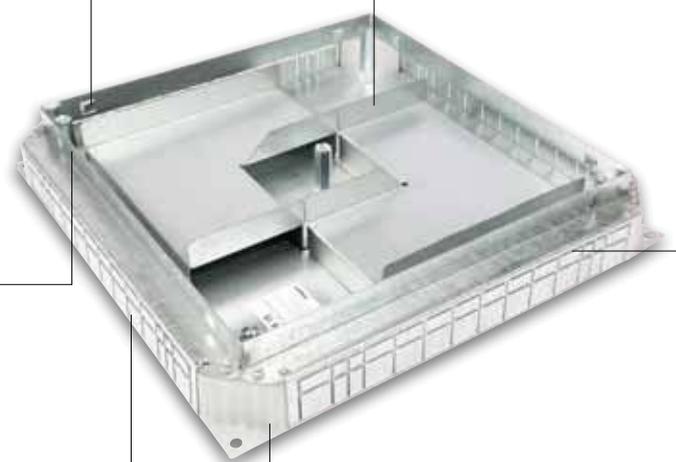

SIDE WALL
with removable and pre cut knockouts

HEIGHT ADJUSTABLE JUNCTION BOXES FOR SCREED FLOOR SYSTEMS

LID FOR CARPET / TILE
height can be adjusted from 65mm to 90mm



FLY-OVERS
OPTIONS AVAILABLE
to ensure data and
power crossover at 90°

KNOCKOUTS
side plates provided with knockouts
as per Raceways dimensions.

MOULDED CAST CORNERS
for extra strength and stability

Remain accessible once the screed is poured for adding new cables and for changing the installation. For cable junction and/or installing floor boxes. To be installed at the Raceway intersection.


Raceways and junction boxes for screed floors




Dimensions (p. 46)
Technical characteristics (p. 46)

Confirms to EN 50 085 - 2 - 2
Raceways are made from PVC and Galvanised sheet.
Compatible with Cat.6 structured cabling system.

Pack	Cat.Nos	Raceways - PVC
		IP 20 - IK 08 For distributing LV and ELV cabling in screed floors installations. PVC Raceways combines with junction boxes, backboxes for wiring devices, fixing and coupler accessories Optimized profile to increase cabling capacity
18*	6897 00	Raceway - PVC - height 25mm; length 2m. Can be assembled to obtain multiple compartment configurations
2/160*	6897 01	75mm x 25mm - 1 compartment 150mm x 25mm - 2 compartments, use 2x Cat.No 6897 00 225mm x 25mm - 3 compartments 300mm x 25mm - 4 compartments Raceways use 1x Cat.No 6897 00 + 1x Cat.No 6897 01
		Raceways - PVC - height 38mm; length 2m.
24*	0896 67	50mm x 38mm - 1 compartment
32*	0896 68	100mm x 38mm - 2 compartments
20*	0896 69	150mm x 38mm - 3 compartments

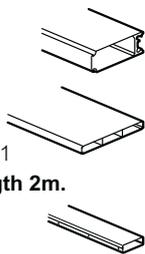

Pack	Cat.Nos	Raceways - Metal / GI
		IP 20 - IK 08 For distributing LV and ELV cabling in screed floors installations. Particularly suitable for applications requiring EMC screening Pre-Galvanised sheet with thickness on 1.6mm Can be combined with junction boxes, backboxes (floorboxes) for wiring devices, fixing and coupler accessories Consist of body & cover. Cover fitted on to the body with screws & can be opened easily if required.
		Raceways - Metal/GI - height 25mm; length 2.44m.
3/54 ⁽¹⁾	6895 10	50mm x 25mm - 1 compartment
3/21 ⁽¹⁾	6895 11	75mm x 25mm - 1 compartment
3/54 ⁽¹⁾	6895 12	100mm x 25mm - 1 compartment
3/18 ⁽¹⁾	6895 13	150mm x 25mm - 1 compartment
3/12 ⁽¹⁾	6895 14	225mm x 25mm - 3 compartments
3/18 ⁽¹⁾	6895 15	300mm x 25mm - 3 compartments
		Raceways - Metal/GI - height 38mm; length 2.44m
3/54 ⁽¹⁾	6895 00	50mm x 38mm - 1 compartment
3/21 ⁽¹⁾	6895 01	75mm x 38mm - 1 compartment
3/54 ⁽¹⁾	6895 02	100mm x 38mm - 1 compartment
3/36 ⁽¹⁾	6895 03	150mm x 38mm - 1 compartment
3/12 ⁽¹⁾	6895 04	225mm x 38mm - 3 compartments
3/18 ⁽¹⁾	6895 05	300mm x 38mm - 3 compartments

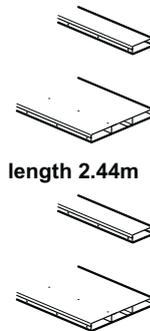

* Number of meters in pack

⁽¹⁾ Unit of measure in numbers

NEW

Raceways and junction boxes for screed floors



*Dimensions (p. 48-49)
Technical characteristics (p. 48-49)*

Confirms to EN 50 085 - 2 - 2
Raceways are made from PVC and Galvanised sheet.
Compatible with Cat.6 structured cabling system.

Pack Cat.Nos Raceways accessories

Pack	Cat.Nos	Description
		Fixing bracket
		For fixing Raceways on the floor
9	6897 09	50mm x 25mm (metal)
9	6897 10	75mm x 25mm (PVC and metal)
9	6897 12	100mm x 25mm (metal)
9	6897 15	150mm x 25mm (PVC and metal)
9	6897 20	225mm x 25mm (PVC and metal)
9	6897 30	300mm x 25mm (PVC and metal)
9	6897 27	50mm x 38mm (PVC and metal)
9	6897 28	75mm x 38mm (metal)
9	6897 37	100mm x 38mm (PVC and metal)
9	6897 38	150mm x 38mm (PVC and metal)
9	6897 25	225mm x 38mm (metal)
9	6897 35	300mm x 38mm (metal)
		Riser
1	6897 23	Vertical - 225mm width Raceways
1	6897 33	Vertical - for 300mm width Raceways
		Coupler for joining Raceways
6	6897 77	Coupling 38
6	6897 79	Coupling 25


Pack Cat.Nos Junction box

Pack	Cat.Nos	Description
		For direct access to cables at the intersection of Raceways Supplied completely with base and cover plate (Lid)
		Height adjustable junction box 65 - 90mm
1	6896 10	150 x 150 x 65 - 90mm
1	6896 11	225 x 225 x 65 - 90mm
1	6896 12	300 x 300 x 65 - 90mm
1	6896 13	400 x 400 x 65 - 90mm
		Height adjustable junction box 65 - 90mm with fly over
		For direct access to cables at the intersection of floor Raceways while maintaining perfect separation and 90° cross overs between data and power cables
1	6896 14	225 x 225 x 65 - 90mm with flyover
1	6896 15	300 x 300 x 65 - 90mm with flyover
1	6896 16	400 x 400 x 65 - 90mm with flyover
		Optional site cover for junction box
10	6896 18	150 x 150 x 65 - 90mm with metal cover
10	6896 19	225 x 225 x 65 - 90mm with metal cover
10	6896 20	300 x 300 x 65 - 90mm with metal cover
10	6896 21	400 x 400 x 65 - 90mm with metal cover

Raceways system

for screed floor

System overview

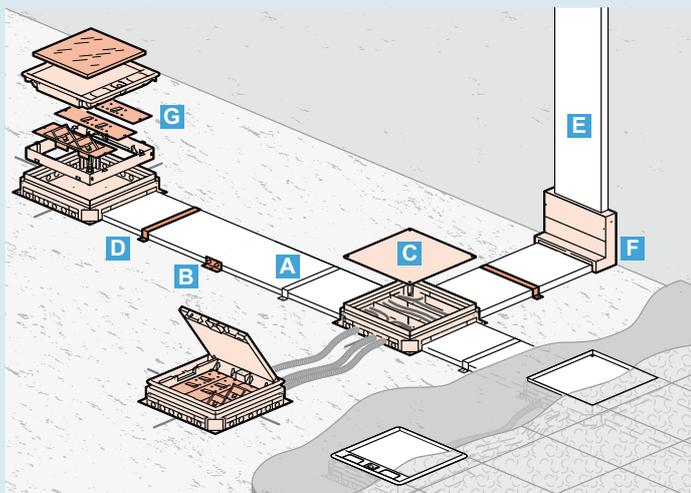

- A** Raceways
- B** Coupler
- C** Junction box
- D** Fixing bracket
- E** Vertical trunking such as DLP
- F** Riser
- G** Floor box (back-box + lid and trim)
Socket outlets and data socket plates to be ordered separately

Standards - PVC and Metal / GI

Standard EN 60-670 and EN 50085-2-2 concerns systems for distributing currents in the floor (sunken or surface mounted) It ensures constant performance along the entire distribution up to the user connection point

Classification chart

Classification for screed floor		Screed floor
6.2	Resistance to impact for installation and application	2.0 J
6.3	Minimum storage and transport temperature	- 25 °C
6.3	Minimum installation and application temperature	- 5 °C
6.3	Maximum application temperature	+ 60 °C
6.4	Resistance to flame propagation	Non-flame propagating
6.5	Electrical continuity characteristics	Without electrical continuity characteristic (PVC Raceways) with electrical continuity characteristic (metal Raceways & accessories)
6.6	Electrical insulating characteristics	With electrical insulating characteristic (PVC Raceways) Without electrical insulating characteristic (Metal Raceways & accessories)
6.7	Degree of protection provided by enclosure	IP 20
6.9	System access cover retention	With a tool
6.101	Floor treatment	For dry-treatment of floor
6.102	Resistance to vertical load applied through small surface area	1500 N ⁽¹⁾
6.103	Optional classification: resistance to vertical load applied through large surface area	3 000 N
	Rated voltage (PVC Raceways)	500 V
	Protection against mechanical impact	IK 08
	Linear impedance in mΩ/m of metal Raceways length	5 mΩ/m

(1)For 4 compartments, resistance to vertical load applied over a small surface area = 750 N
*for adjustable junction box, resistance to vertical load applied over a small surface area = 500N
**for adjustable junction box, resistance to vertical load applied over a large surface area = 2000N

Raceways - PVC

Materials

Raceway straight lengths are extruded from PVC
Appearance: all PVC Raceway are in grey colour and with smooth finish
Chemical resistance: non-corrosive and not affected by sea water
Excellent resistance to mineral acids, alkalis and detergents but liable to attack from solvents. PVC Raceway is non-conductive
Workability: the Raceway is light weight and can be easily cut with hand tools
Fire: non flame propagating

Product details PVC

Raceways - PVC Cat.Nos 6897 00/01

Clipping system - To combine with junction box or backbox.
Delivered in standard length 2m / Standard depth: 25mm / Thickness: 1mm for partitions / 1.2mm for Raceways

Note: Can be joined (clipping system) to make a number of compartments to suit the required width

Cabling capacity for PVC floor Raceway 25mm height

Cat.Nos	Dimensions	Number of compartments	Section 45% Fill mm ²
6897 00	75 x 25	1	754
6897 01	225 x 25	1 2 3	680/671/680

Raceways - PVC Cat.Nos 0896 67/68/69/70

PVC floor Raceway allows :
- Distribution of power and data in a concrete floor.

Combines with metal underfloor boxes for cable junction or floor box installation. IP40/IK08, length 2m.

Cabling capacity for PVC floor Raceway : 38mm height

Ø maxi / compartment : → Ø 34mm for floor Raceway height 38mm

Cat.Nos	Dimensions	Number of compartments	Section 45% Fill mm ²
0896 67	50 x 38	1	689
0896 68	100 x 38	1 2	689/689
0896 69	150 x 38	1 2 3	689/689/689

Raceways - Metal / GI

Metal trunkings Cat.Nos 6895 00/01/02/03/04/05/10/11/12/13/14/15

Materials

Raceway - metal and accessories

Material pre-galvanised sheet (DX51D Z120 MAC)
Standard thickness: 1.6mm for body and cover / 1mm for divider
Standard length: 2.44m
Number of compartments: 1 and 3 compartments
Standard depth: 25mm and 38mm

Product details - Metal / GI

Raceways - metal (for example with 225 x 25):
- compartment 1, 2 and 3 have the same capacity

Metal Raceways allows: distribution of power data underneath to the screed floor.

Cat.Nos	Dimensions	Number of compartments	Section 45% Fill mm ²
6895 00	50 x 38	1	663
6895 01	75 x 38	1	1040
6895 02	100 x 38	1	1417
6895 03	150 x 38	1	2171
6895 04	225 x 38	1	1118/1150/1118
6895 05	300 x 38	1	1512/1544/1512
6895 10	50 x 25	1	397
6895 11	75 x 25	1	637
6895 12	100 x 25	1	867
6895 13	150 x 25	1	1328
6895 14	225 x 25	1	703/723/703
6895 15	300 x 25	1	950/970/950

Raceways system

for screed floor

■ Selection chart

for PVC and metal

Trunkings Cat.Nos 6895 00 to 05, 6895 10 to 15, 0896 67 to 70, 6897 00/01

Trunking	50 x 25 (mm)	75 x 25 (mm)	100 x 25 (mm)	150 x 25 (mm)	225 x 25 (mm)	300 x 25 (mm)	50 x 38 (mm)	75 x 38 (mm)	100 x 38 (mm)	150 x 38 (mm)	225 x 38 (mm)	300 x 38 (mm)
PVC	-	6897 00 	-	6897 00 x 2 	6897 01 	6897 01 + 6897 00 	0896 67 	-	0896 68 	0896 69 	-	-
Metal	6895 10 	6895 11 	6895 12 	6895 13 	6895 14 	6895 15 	6895 00 	6895 01 	6895 02 	6895 03 	6895 04 	6895 05

■ Cable capacity guide

The number and location of boxes will depend on the end user requirements.

If the furniture layout is available, a lid & trim should be considered for each workstation or desk.

If the final furniture layout is not available, the minimum recommended distribution is one lid & trim for every 10m², and the maximum being one lid & trim per 4m².

45% available cross section: POWER/DATA CABLES

Trunking	Available section at 45% fill mm ²	Capacity: maximum number of conductors per compartment (for one specific cable type)													
		PVC stranded							Twin & earth			Data cables			
		1.5 ² Ø3.3	2.5 ² Ø4	4 ² Ø4.6	6 ² Ø5.2	10 ² Ø6.7	16 ² Ø7.8	25 ² Ø9.7	2.5 ² Ø10.5	4 ² Ø11.2	6 ² Ø13.7	cat. 5e UTP Ø5.5	cat. 5e STP Ø6	cat. 6 UTP Ø6.5	cat. 6 STP Ø7
225x25	703	82	56	42	33	20	15	10	8	7	5	23	20	17	14
	723	84	57	44	34	20	15	10	8	7	5	24	20	17	15
	703	82	56	42	33	20	15	10	8	7	5	23	20	17	14
225x38	1118	130	89	67	53	32	23	15	13	11	8	37	31	26	23
	1150	134	91	69	54	33	24	16	13	12	8	38	32	27	23
	1118	130	89	67	53	32	23	15	13	11	8	37	31	26	23
300 x 25	950	111	75	57	45	27	20	13	11	10	6	31	26	23	19
	970	113	77	58	46	27	20	13	11	10	7	32	27	23	20
	950	111	75	57	45	27	20	13	11	10	6	31	26	23	19
300 x 38	1512	176	120	91	71	43	32	20	18	15	10	50	42	36	31
	1544	179	123	93	73	44	32	21	18	16	10	51	43	37	32
	1512	176	120	91	71	43	32	20	18	15	10	50	42	36	31
50 x 25	397	46	31	24	19	11	8	5	5	4	3	13	11	9	8
75 x 25	637	74	51	38	30	18	13	9	7	6	4	21	18	15	13
100 x 25	867	101	69	52	41	25	18	12	10	9	6	29	24	21	18
150 x 25	1328	154	105	80	63	38	28	18	15	13	9	44	37	31	27
50 x 38	663	77	53	40	31	19	14	9	8	7	4	22	18	16	14
75 x 38	1040	121	83	63	49	29	22	14	12	11	7	34	29	25	21
100 x 38	1417	165	112	85	67	40	30	19	16	14	10	47	39	34	29
150 x 38	2171	252	172	131	102	61	45	29	25	22	15	72	60	51	44
75 x 25	754	88	60	45	36	21	16	10	9	8	5	25	21	18	15
225 x 25	680	79	54	41	32	19	14	9	8	7	5	23	19	16	14
	671	78	53	40	32	19	14	9	8	7	5	22	19	16	14
	680	79	54	41	32	19	14	9	8	7	5	23	19	16	14
50 x 38	689	80	55	41	32	20	14	9	8	7	5	23	19	16	14
100 x 38	689	80	55	41	32	20	14	9	8	7	5	23	19	16	14
	689	80	55	41	32	20	14	9	8	7	5	23	19	16	14
150 x 38	689	80	55	41	32	20	14	9	8	7	5	23	19	16	14
	689	80	55	41	32	20	14	9	8	7	5	23	19	16	14
	689	80	55	41	32	20	14	9	8	7	5	23	19	16	14

Screed system Raceways complies with EN50085-1: 2005 and draft EN50085 Part 2-2.


The above table gives the available capacity units on 45% factor, applied to the internal wiring area.

Raceways accessories for screed floor

■ Dimensions

Riser Cat.Nos 6897 23/33

The riser allows a change of direction (horizontal to vertical) of the Raceways. Conduit or Raceways can be run vertically from the box.

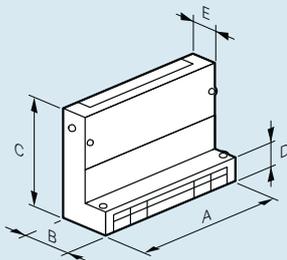


Use for Raceways	Cat.Nos
225 x 38mm PVC or metal	6897 23
300 x 25 / 38mm PVC or metal	6897 33

Cat.Nos	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
6897 23	250	89	201	43	52
6897 33	325	89	201	43	52


■ Dimensions

Fixing bracket Cat.Nos 6897 09/10/12/15/20/25/27/28/30/35/37/38

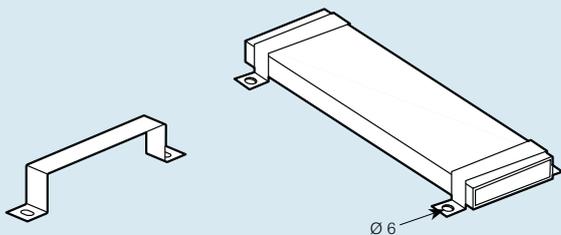

For fixing Raceways onto the slab.


Dimension (mm)

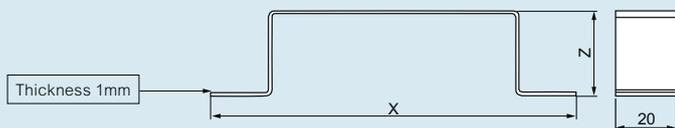

Dimension (mm)

Cat.Nos	Fixing brackets	X	Z
6897 09	50 x 25mm	92	27.5
6897 10	75 x 25mm	120	27.5
6897 12	100 x 25mm	142	27.5
6897 15	150 x 25mm	194	27.5
6897 20	225 x 25mm	267	27.5
6897 30	300 x 25mm	342	27.5
6897 27	50 x 38mm	92	40.5
6897 28	75 x 38mm	120	40.5
6897 37	100 x 38mm	142	40.5
6897 38	150 x 38mm	194	40.5
6897 25	225 x 38mm	267	40.5
6897 35	300 x 38mm	342	40.5

Couplings Cat.Nos 6897 77/79

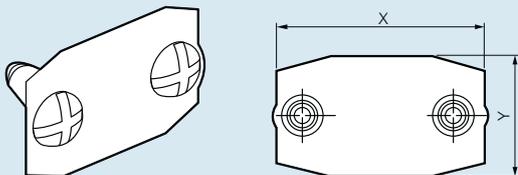

Used to connect two Raceways lengths

Cat.Nos	Designation	X	Z
6897 77	Coupling 38	55	32
6897 79	Coupling 25	55	19


Thickness: 1mm, Comes with 2 screws M6 x 10

junction box for screed floor

■ Dimensions



Junction box Cat.Nos 6896 10/11/12/13/14/15/16

The junction box should be positioned directly on the slab. It provides access to cables at the intersection of trunkings or changes of direction. The junction box allows deviation of power and data cables. Screed height should be between 65 to 90mm. Junction boxes are supplied with a base with flyovers and a lid. A disposable cover protection is available as an option. Side plates are pierced to suit Raceways.

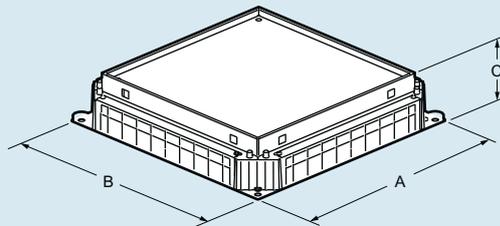

Dimensions (mm)


Cat.Nos	A	B	C
6896 10	252	252	65-90
6896 11/14	325	325	65-90
6896 12/15	402	402	65-90
6896 13/16	500	500	65-90

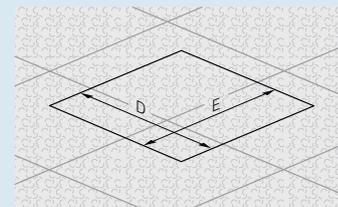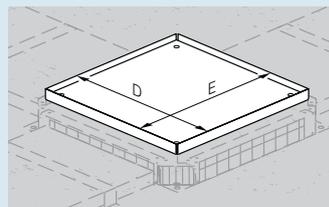

Dimensions (mm) for carpet cut out

Cat.Nos	D	E
6896 10	192.5	192.5
6896 11/14	263	263
6896 12/15	340	340
6896 13/16	437	437

Note: junction box with flyovers include for Cat.Nos 6896 14/15/16

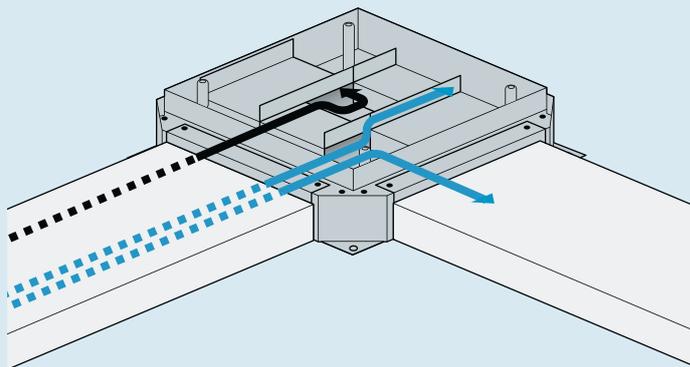


junction box for screed floor

Raceways system for screed floor


■ Dimensions (continued)

Junction box Cat.Nos 6896 10/11/12/13 & mask Cat.No 6896 18/19/20/21

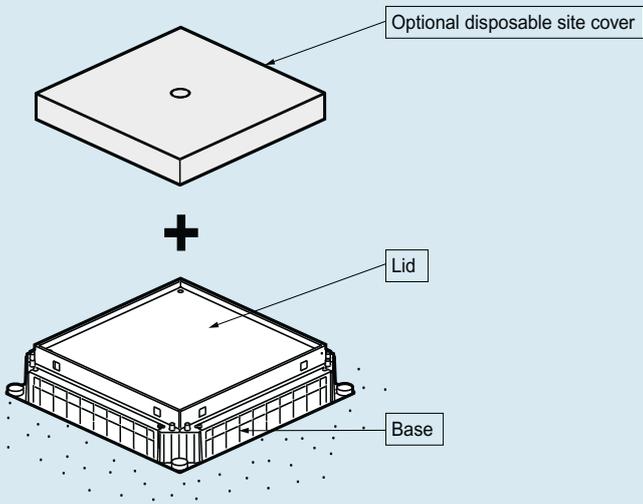

Raceways	150mm max.	225mm max.	300mm max.	400mm max.			
Disposable site cover	6896 18	6896 19	6896 20	6896 21			
Junction box	6896 10	6896 11	6896 14	6896 12	6896 15	6896 13	6896 16


A (mm)	B (mm)	A (mm)	B (mm)	A (mm)	B (mm)	A (mm)	A (mm)
198	198	287	267	348	348	446	446

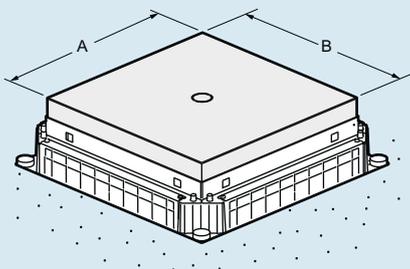


The junction box includes a base, flyovers, lid and the disposable cover protection. The junction box is designed to suit Raceways allows cables to be pulled over long distances.

■ Installation process


Mark the pathway for Raceways, junction boxes and backboxes.

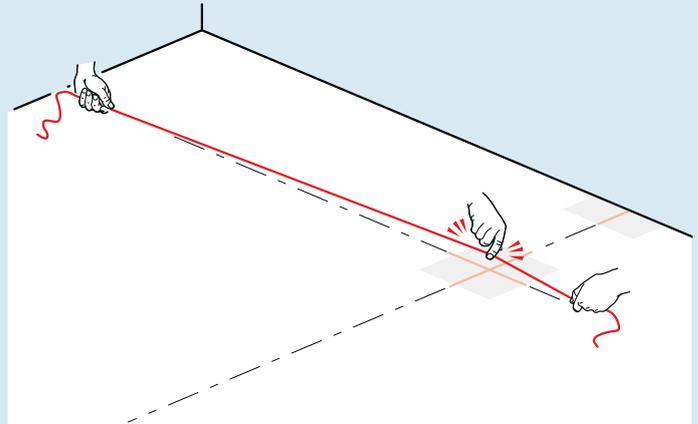

Fix risers, junction boxes and backboxes on the slab.

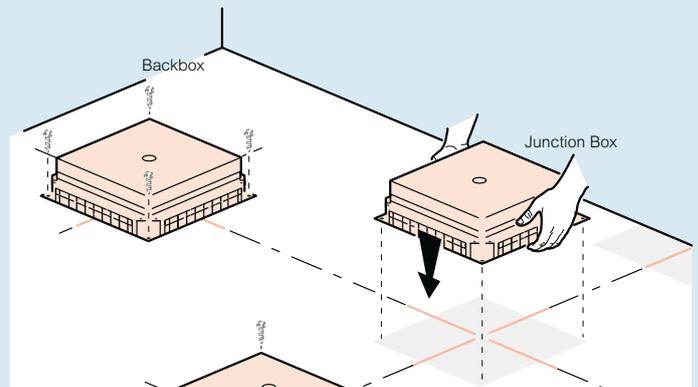


Remove knockouts as per Raceway dimension.

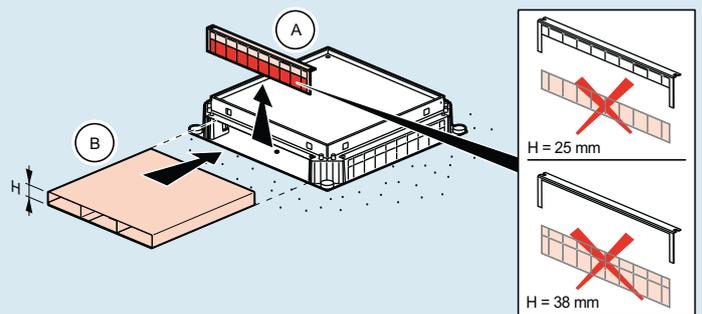


Raceways system for screed floor

■ Installation process (continued)


Connect the Raceways to the junction box & fix the knock out to fit the required Raceway.

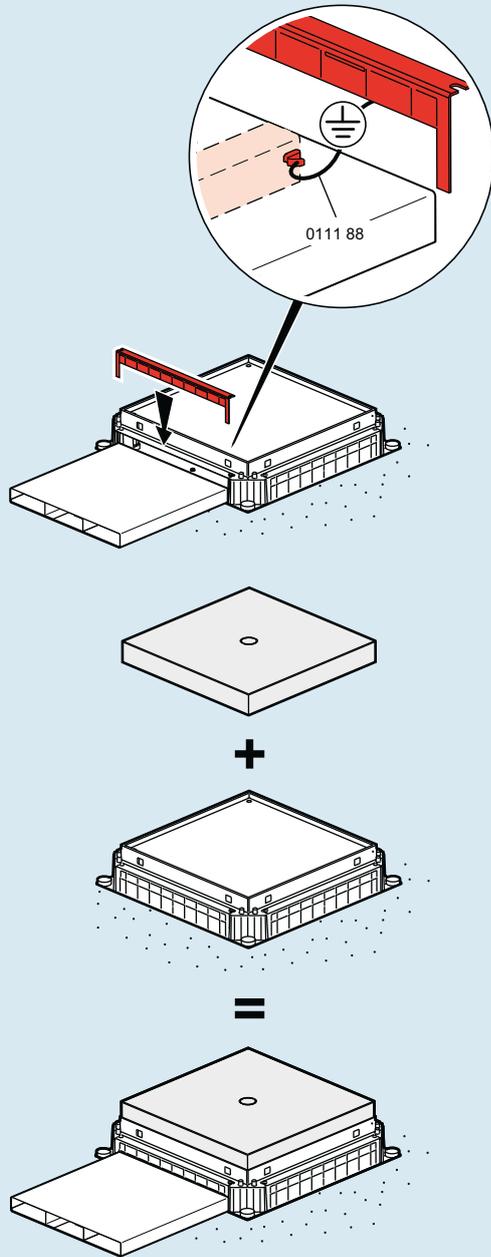


Fix Raceways with couplers and fixing brackets

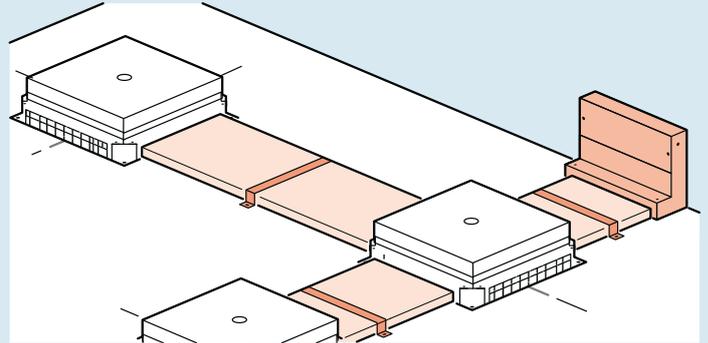

Execute screeding

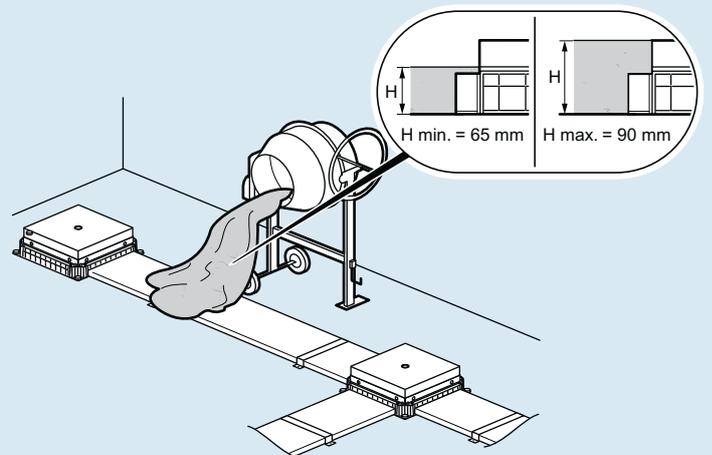


Remove disposable metal cover

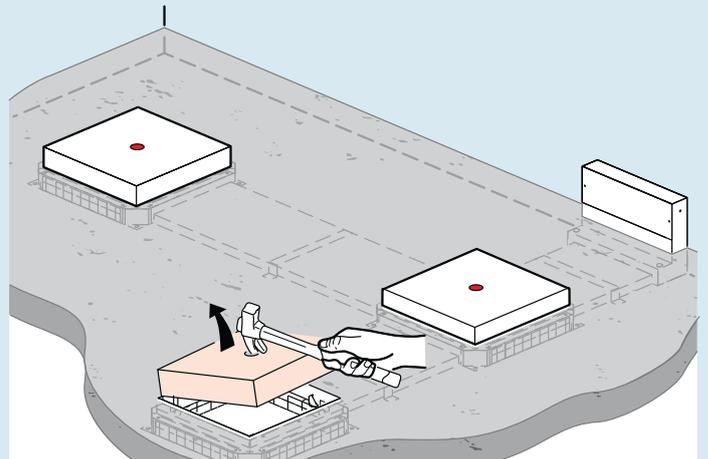

Raceways system for screed floor

Installation process (continued)

Adjust junction box to floor level

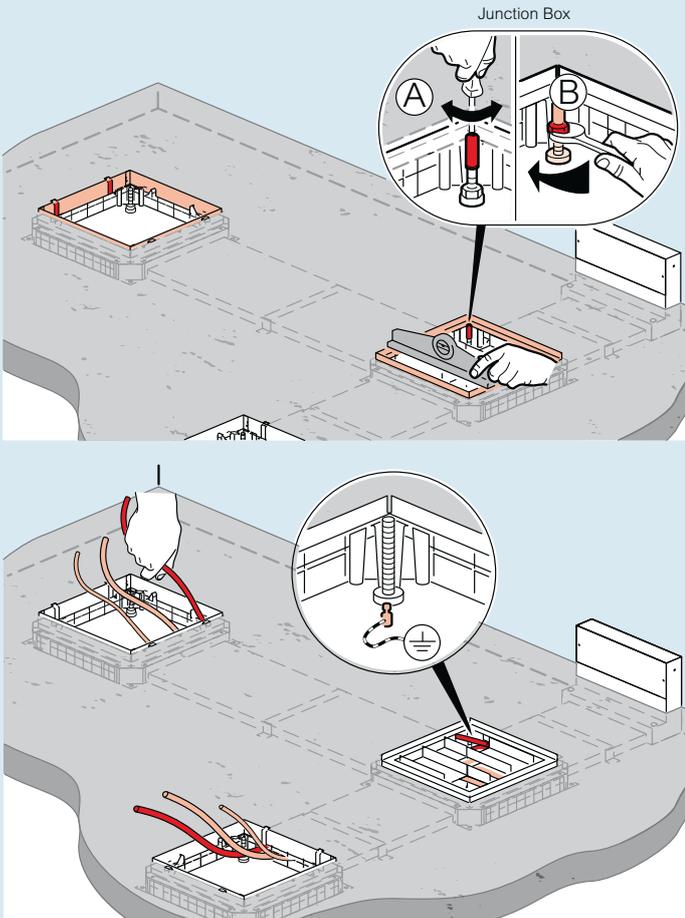


Backboxes and junction boxes don't need to be levelled to screed height. Height adjustment can be done after pouring screed.

Example of layout


For optimal flexibility of the installation, the trunking is usually installed on either a Grid, Fishbone or a Comb Pattern of single, double or triple runs.

Grid Pattern

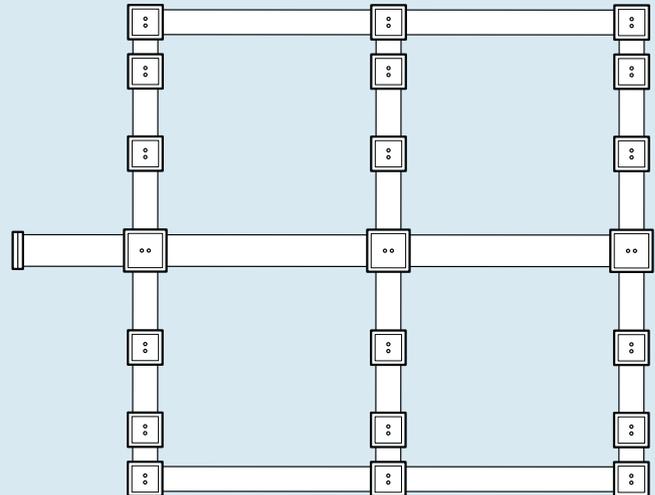


A Grid Pattern is widely used in areas where the occupants require the highest degree of flexibility in reconfiguring workspace. Capacity can be increased by returning individual ring mains through different runs of trunking, which in itself allows easier installation.

Fishbone Pattern

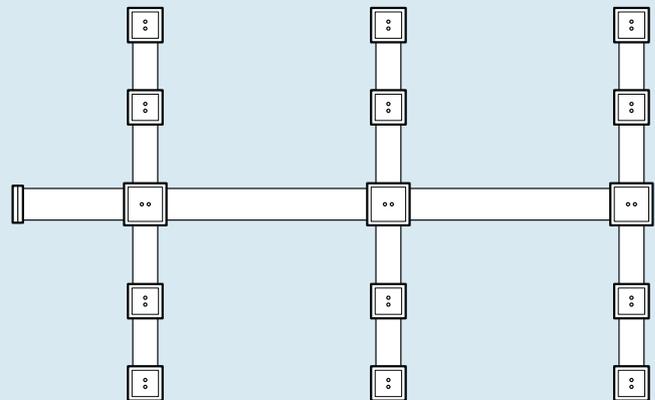


The Fishbone Pattern is ideal for a medium sized area where fewer boxes are required.

Comb Pattern

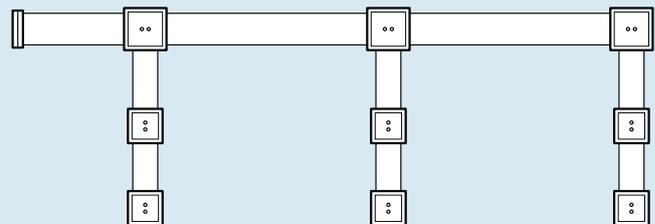

The Comb Pattern is the most economical way of installation in which a minimum of trunking is used. The Comb Pattern is suited for small to medium office areas.

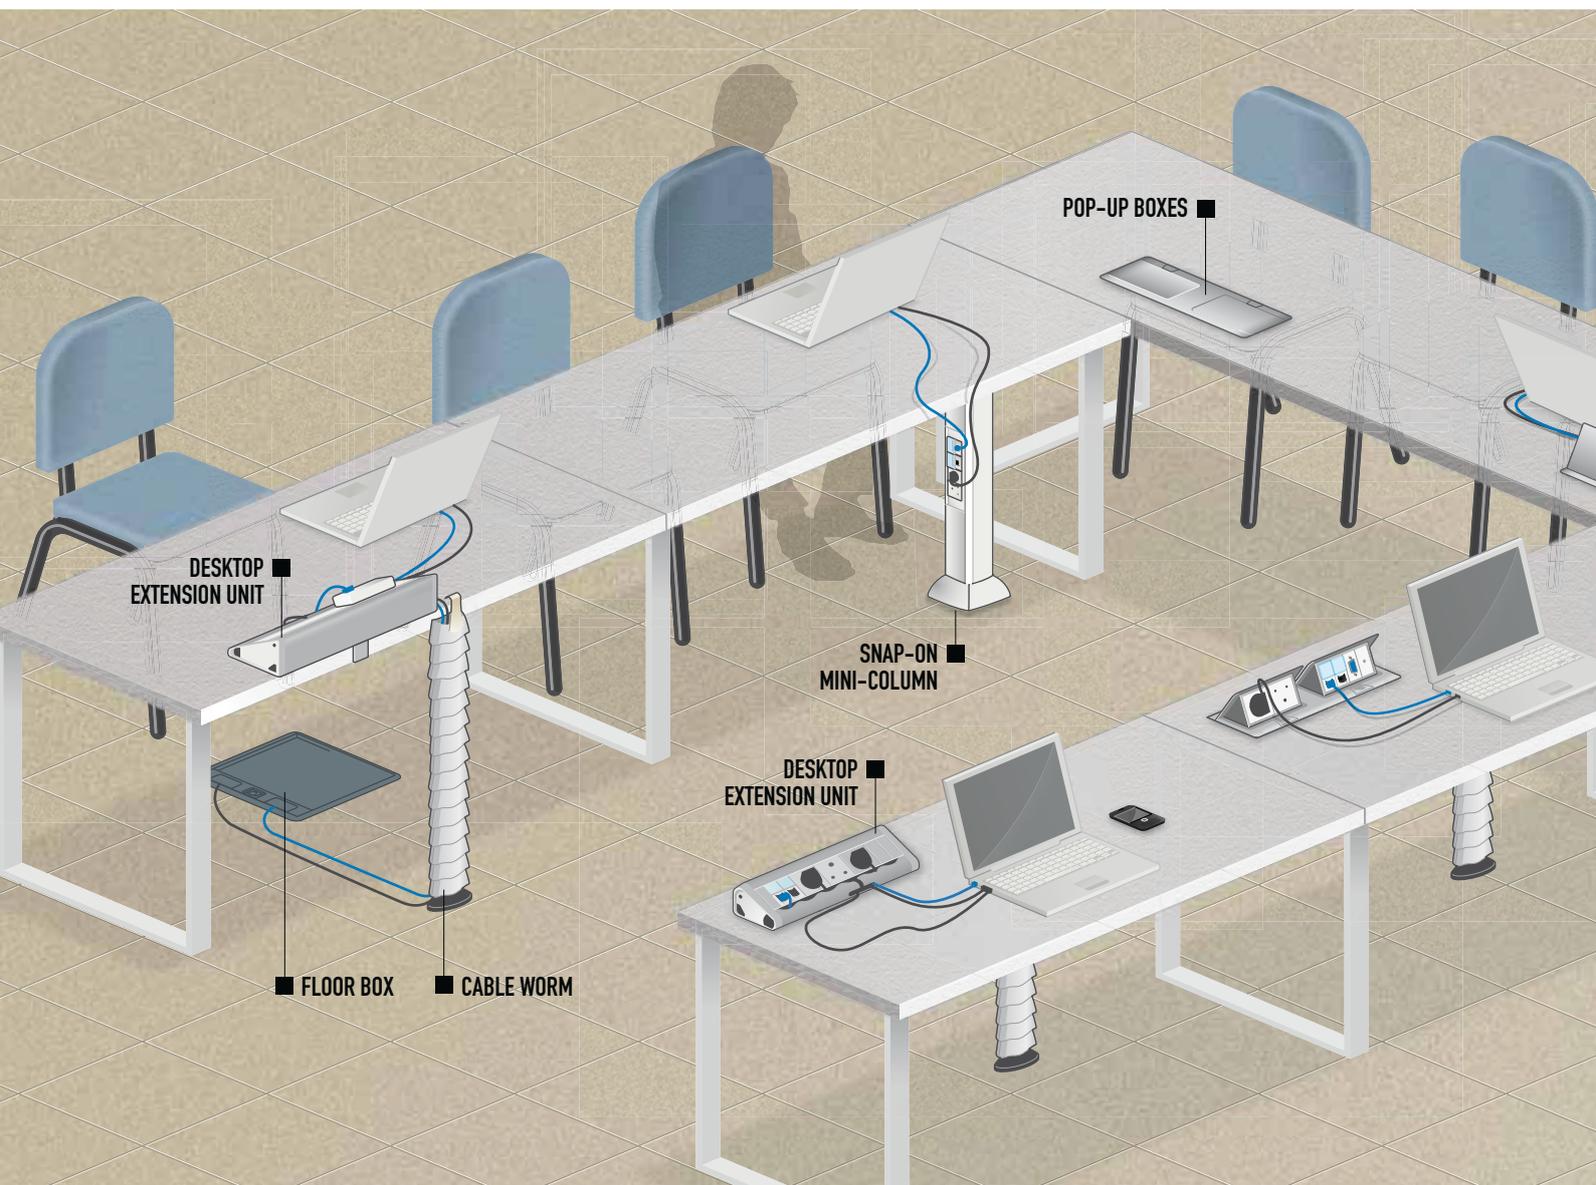

POP-UP BOXES



Refer pg. 56

POWER AND DATA DESK GROMMET



Refer pg. 60

DESKTOP EXTENSION UNIT



Refer pg. 64

POWER AND DATA SUPPLIED RIGHT TO THE DESKTOP

With its new offer of integrated workstation solutions, Legrand provides users with functionality, ergonomics, comfort and speed of installation for various office building areas.

Pop-up boxes, power & data desk grommets, desk modules, flush mounting office modules... integrate harmoniously in all types of furniture for meeting rooms, individual or open space offices... Users are immediately operational. They have at their fingertips all the power and low current sockets to connect their equipment. The rich offer of finishes bring modern aesthetic for a perfect integration into today office environment.

FLUSH MOUNTING OFFICE MODULES



Refer pg. 68



SLEEK DESIGN

Extra-slim format to blend discreetly into the office furniture or floor



ELEGANT FINISHES

Aluminium, bronze, stainless steel, black or white - a perfect match for furniture and decor



SAFETY AND EASE OF USE

Soft opening cover with damper and push & slide locking system



POP-UP BOXES

Our sleek new ergonomically designed pop-up boxes provide real ease of use and rapid connection solutions for mobile applications such as PCs, mobile phones, audio and video systems.



FUNCTIONALITY AND FLEXIBILITY

Available in 3, 2x3, 4 and 2x4 modules for custom configuration or ready assembled with low and high current functions

pop-up type flush-mounting boxes

for workstation & meeting room table applications



0540 13



0540 18



0540 06



0540 00



0540 23



0540 28



0540 33



Can be installed in concrete or raised access floors or integrated directly into the furniture (desks, meeting room tables, etc)
Conform to IEC 60670-1, IEC 60670-23 et IEC 60884-1

Pack	Cat.Nos	Pop-up boxes to be equipped
		Slim design for perfect integration into the floor or office furniture Soft opening for enhanced comfort and safety Equipped with "push and slide" locking system to avoid accidental opening by feet To be equipped with Arteor/Myrius socket outlets For installation use the flush-mounting boxes for concrete floors or the kits for raised access floors or table top
1	0540 10	3 modules
1	0540 15	● Matt Aluminium finish
1	0540 20	● Brushed Brass
		● Brushed Stainless Steel finish
1	0540 12	6 (2 x 3) modules
1	0540 17	● Matt Aluminium finish
1	0540 22	● Brushed Brass
		● Brushed Stainless Steel finish
1	0540 11	4 modules
1	0540 16	● Matt Aluminium finish
1	0540 21	● Brushed Brass
1	0540 26	● Brushed Stainless Steel finish
1	0540 31	● Matt Black
		● Glossy White
1	0540 13	8 (2 x 4) modules
1	0540 18	● Matt Aluminium finish
1	0540 23	● Brushed Brass
1	0540 28	● Brushed Stainless Steel finish
1	0540 33	● Matt Black
		● Glossy White

Pack	Cat.Nos	Installation kits for raised access floors or table top
		Include an empty receptacle and fixing brackets for raised access floor tiles or table tops Equipped with cable retainer for power cables, to ensure increased safety of the installation Compatible with: - Cat. 6 data cabling - Audio/video cabling
1	0540 05	3 modules
1	0540 07	6 (2 x 3) modules
1	0540 06	4 modules
1	0540 08	8 (2 x 4) modules
		Flush-mounting boxes for installation in concrete floors
		For installation of pop-up floor boxes in concrete floors Equipped with knockouts for Ø 20 and Ø 25 mm conduits
		Metal flush-mounting boxes
1	0540 00	3 modules
1	0540 02	6 (2 x 3) modules
1	0540 01	4 modules
1	0540 03	8 (2 x 4) modules

pop-up type flush-mounting boxes

technical characteristics

■ Technical characteristics

Classification of pop-up flush-mounting boxes according to NFC 61-314 / EN 60670-1 / EN 60670-23

Earthing system: $R < 0.05 \text{ Ohms}$
 Protection against mechanical impact: IK 07
 Degree of protection: IP 30 cover open
 IP 40 cover closed

Resistance to vertical load applied through small surface area:
 1500 N cover open
 3000 N cover closed

Rated voltage: U 500 V - $R > 5 \text{ MOhms}$
 Electric strength: 2000 V
 Installation on the floor: to be installed on floor subjected to a dry treatment

Material

Halogen free, fire proofed and no propagator of the flame
 Corrosion resistant and to temperature changes


Finishes	Material
Brass	Brass material
Aluminium	Aluminium material
Stainless Steel	Zamak nickel coating
Black	Aluminium material with black painting
White	Aluminium material with white painting

High/low current compatibility

Floor type	High current	Low current
Concrete	Yes	No
Technical floor	Yes	Cat. 6 compatible
Furniture	Yes	Cat. 6 compatible


■ Dimensions

Cover

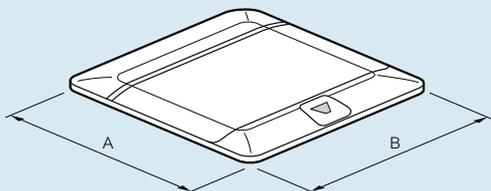

Pop-up size	A (mm)	B (mm)
3 modules	120	120
4 modules	120	142.5
6 modules	120	230
8 modules	120	275


Empty pop-up

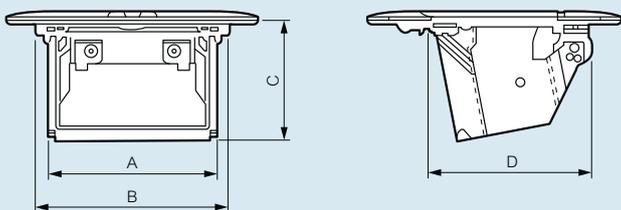

Pop-up size	A (mm)	B (mm)	C (mm)	D (mm)
3 modules	79.8	92	57	77.5
4 modules	102.3	114.5	57	77.5
6 modules	189.8	202	57	77.5
8 modules	231.6	247	57	77.5

■ Installation - on screed floor

Screed floors (fixing centres)



Pop-up size	A (mm)
3 modules	84
4 modules	106.5
6 modules	194
8 modules	239


Under screed floor

Minimum depth = 60 mm

Use the backbox for concrete with conduits diameter 20 mm.

It is necessary to close the backbox for concrete using the protection cover delivered with before pouring the concrete in order to prevent that the concrete to enter in the backbox.


The backbox for concrete is delivered with protection cover:

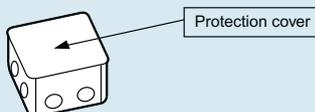

Pop-up 3mod	Pop-up 4mod	Pop-up 6 (2x3) mod	Pop-up 8 (2x4) mod
Cat.No 54000	Cat.No 54001	Cat.No 54002	Cat.No 54003

Desk


Pop-up with installation kit for desk or technical floor

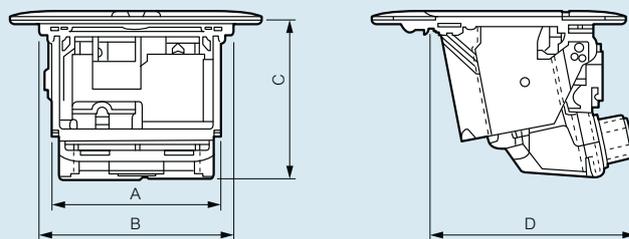

Pop-up size	A (mm)	B (mm)	C (mm)	D (mm)
3 modules	79.8	92	74.8	96.1
4 modules	102.3	114.5	74.8	96.1
6 modules	189.8	202	74.8	96.1
8 modules	231.6	247	74.8	96.1

On the desk or on the technical floor

Cut the desk or technical floor :

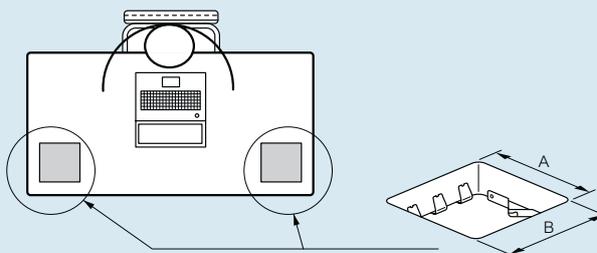

	A(mm)	B(mm)
3 modules	108 (+/-1mm)	108 (+/-1mm)
4 modules	108 (+/-1mm)	131 (+/-1mm)
6 modules	108 (+/-1mm)	218 (+/-1mm)
8 modules	108 (+/-1mm)	263 (+/-1mm)



POWER & DATA DESK GROMMETS

An ingenious ergonomically designed system that can be used to provide power, connect to the data network or recharge a mobile phone.



MODERN FINISHES

White, black or stainless steel finishing plates to match any office environment

power & data desk grommets

for workstation & meeting room table application



Particularly suitable for integration of power, mobile phone charger and data connections into desks.
 A solution which integrates access to high/low currents and cellphone charger.
 A reliable, durable solution with optimal safety (conform to standard CEI 60884, IK07)
 3 finishes available:
 Empty unit with plastic parts in white RAL 9003
 Empty unit with plastic parts in black RAL 9017 and optional cover plate in stainless steel / black color finish

Pack	Cat.Nos	Empty power & data desk grommets
1	0540 70*	To be equipped with Myrius or Arteur socket outlets, Easily retro fitted into a 60 to 80 mm diameter hole in current office desks and workspace table tops (by replacing the desk grommet) Cover opens to 180° angle to prevent breaking For one 2P+E socket ○ White RAL 9003, to be equipped with 1 socket ● Black RAL 9017, to be equipped with 1 socket For one 2P+E socket and USB phone charger Supplied with one USB phone charger output 5 V _{DC} 750 mA, to be wired
1	0540 71*	
1	0540 72*	○ White RAL 9003 with USB, to be equipped with 1 socket
1	0540 73*	● Black RAL 9017 with USB, to be equipped with 1 socket

Pack	Cat.Nos	Pre-wired modules with retractable cords
1	0540 65	For fitting on an empty power & data desktop modules (under the table top) Automatic cable rewind when not connected, for an optimized use of the desk surface Cat. 6 FTP Equipped with: - 1.35 m RJ 45 Cat. 6 FTP retractable cord on the user side and - 1 x RJ 45 socket on the installation side Patch cord for connection to data network to be ordered separately
1	0540 67	USB / micro USB Equipped with - 1.35 m retractable cord with micro USB connector, on the user side and - 0.5 m cable with USB connector on the installation side

Pack	Cat.Nos	Finishing plates for empty power & data desk grommets
10	0540 60	For fitting on an empty power & data desk grommets ○ White RAL 9003 ● Black RAL 9017 ● Stainless Steel
10	0540 62	
10	0540 63	

* Finishing plates to be ordered separately

power & data desk grommets

technical characteristics

Classification of power & data desk grommets


Classification of power & data desk grommets according to IEC 60884-1

Standard IEC 60884-1	Level
7.1.1 Classification according to the degree of protection against access to hazardous parts and against harmful effects due to the ingress of solid foreign objects	IP2X
7.1.2 Classification according to the degree of protection against harmful effects due to the ingress of water	IPX0
7.1.3 Classification according to the provision for earthing	- Accessories with earthing contact
7.1.4 Classification according to the method of connecting the cable	- Rewirable accessories
7.1.5 Classification according to the type of terminals	- Accessories with screw-type terminals - Accessories with screwless terminals for rigid and flexible conductors
7.2.1 Classification according to the degree of protection against electric shock	- Socket-outlets with increased protection
7.2.2 Classification according to the existence of shutters	- Socket-outlets with shutters
7.2.3 Classification according to the method of application/mounting of the socket-outlet	- flush type - portable type - table type
7.2.4 Classification according to the method of installation	- fixed socket-outlets where the cover or cover-plate cannot be removed without displacement of the conductors (type B).
7.3.5 Classification according to the intended use	- socket-outlets for circuits where a single earthing circuit provides protective earthing for connected equipment and exposed conductive parts of the socket-outlet, if any.

MATERIAL CHARACTERISTICS


Blocs desk grommet in ABS, non-flame propagating.

Dimensions

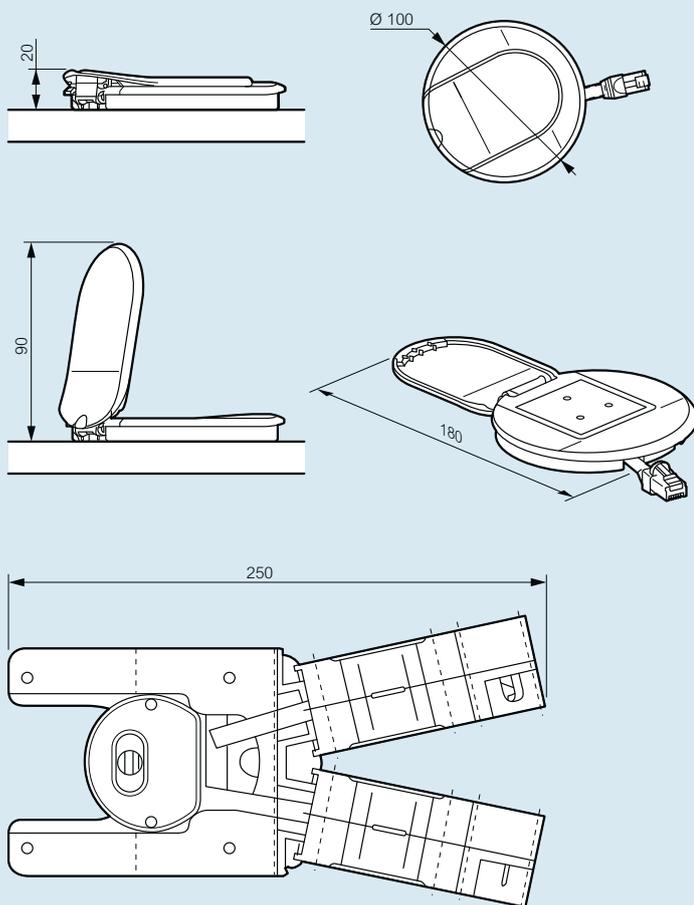

Installation

Can be fitted directly into the desk, in the angle of the furniture
Table top thickness : min. 10 mm
max. 34 mm

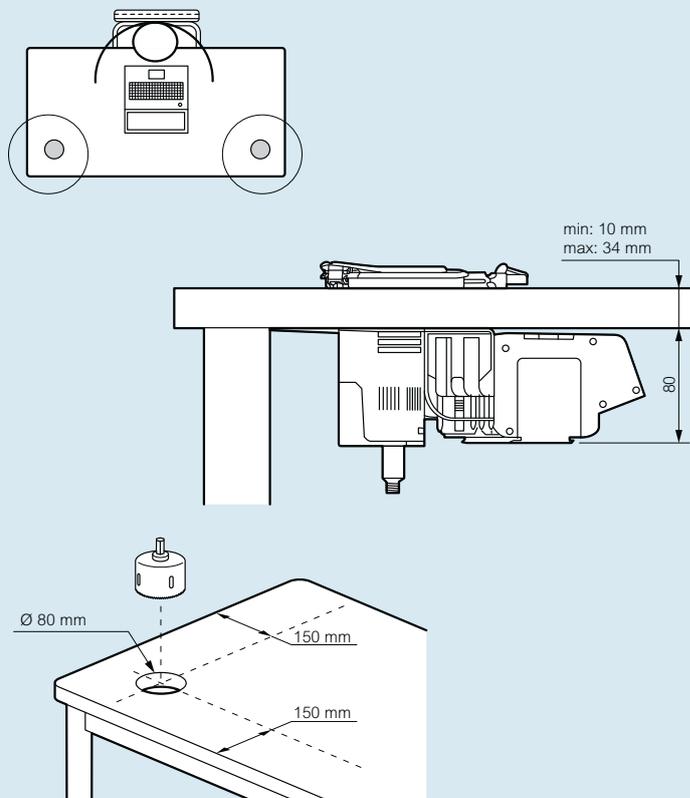



DIVERSE FUNCTIONALITY
 Mix of high and low current functions
 (available in different installation standards)



FLEXIBILITY OF CUSTOMISABLE SOLUTIONS
 Desktop extension modules can support different standards for power sockets or innovative functions




DISCREET CURRENT DISTRIBUTION
 Cablofil unit can be used to carry power / data extension module under the desk & this regular extension module can act as intermediary for multi-outlet desktop extension



DESKTOP MODULES

Available ready to use or as a customisable solution, our multi-outlet desktop extensions provide a high degree of flexibility and ease of use for both mobile and deskbased users.

These solutions can adapt to any furniture configuration and are easily installed on the desks to carry power as close to the user as possible without having to drill through the furniture.

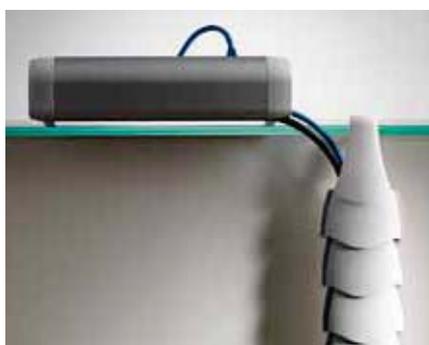

OPTIMUM CABLE MANAGEMENT

A neat solution for tidying and protecting cables from the floor to the workspace

desktop multi-outlet extensions



0535 90



0535 91



0535 99




0535 98

- Aluminium extensions with grey end caps RAL 7035. Reversible cable guide for grouping cords of connected devices
- Designed to have 45° Slope for easy insertion of angled plug
- An ideal solution dedicated to nomadic people and / or satisfy a esthetic needs
- Products answering all needs of office users
- Possibility to organise cables and plugs through the cable guide (reversible if not used)
- A specific accessory allowing to fit the product on the desk in 3 different position
- A reliable and secure installation with conformity to NFC 61-314
- Index of protection: IK7

Pack Cat.Nos Empty desktop multioutlet extensions

Pack	Cat.Nos	Description
1	0535 90	Aluminium extensions with cable guide (reversible) To be equipped with Arteor sockets 8 modules
1	0535 91	12 modules
1	0535 92	16 modules



Pack Cat.Nos Cable worm

Pack	Cat.Nos	Description
1	0535 98	2 compartments Length: 0.75 m White colour Very suitable solution for a safe and design protection of the cabling between desk and floor



Accessories

Pack	Cat.Nos	Description
5	0535 99	Fixing accessory to clip on desktop




desktop and meeting rooms multi outlet extensions

Material characteristics

Body anodised aluminium
 End caps in ABS grey RAL 7035 or stainless steel finish
 Cable management in polyamide RAL 7035
 Cable thightener in ABS
 Linetap in polypropylene

Dimensions

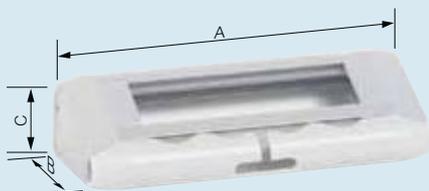


Cat.Nos	A (mm)	B (mm)	C (mm)
0535 90	277	114	75
0535 91	367	114	75
0535 92	457	114	75

Fixing accessory Cat.No 0535 99


Multi-position fixing device:

- 1 - On the desk
- 2 - Under the desk
- 3 - Along the desk
- 4 - On the desk leg


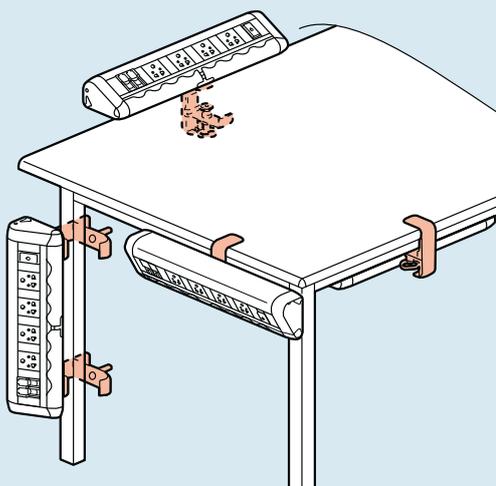


Allow fitting on a desk
 Material : Zamak (stainless steel color)

Cable management

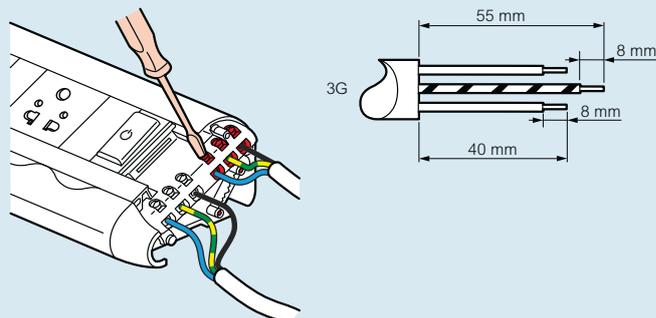


Products are delivered with cable thightener

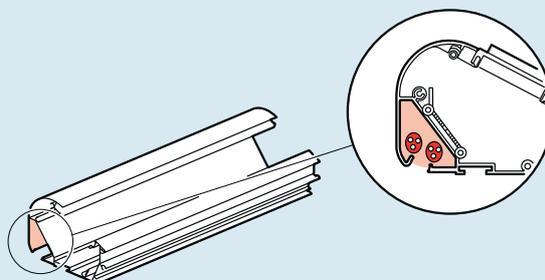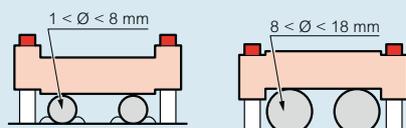


To fit 2 cables 3G 1.5 mm² or 3 data cables + 1 power cable

Passing the cable through the end cap :

The end cap include 1 cable entry.

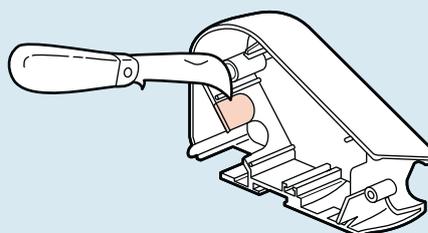



To fit a second cable, take out the part as shown above

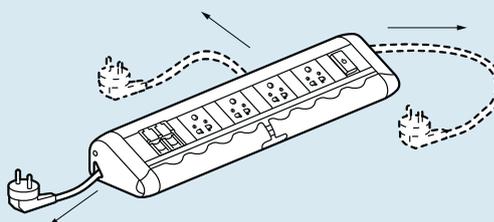

Multiple cable exits to fit any workstation configuration

Reversible cable guide

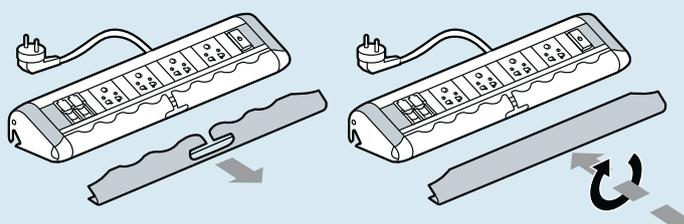

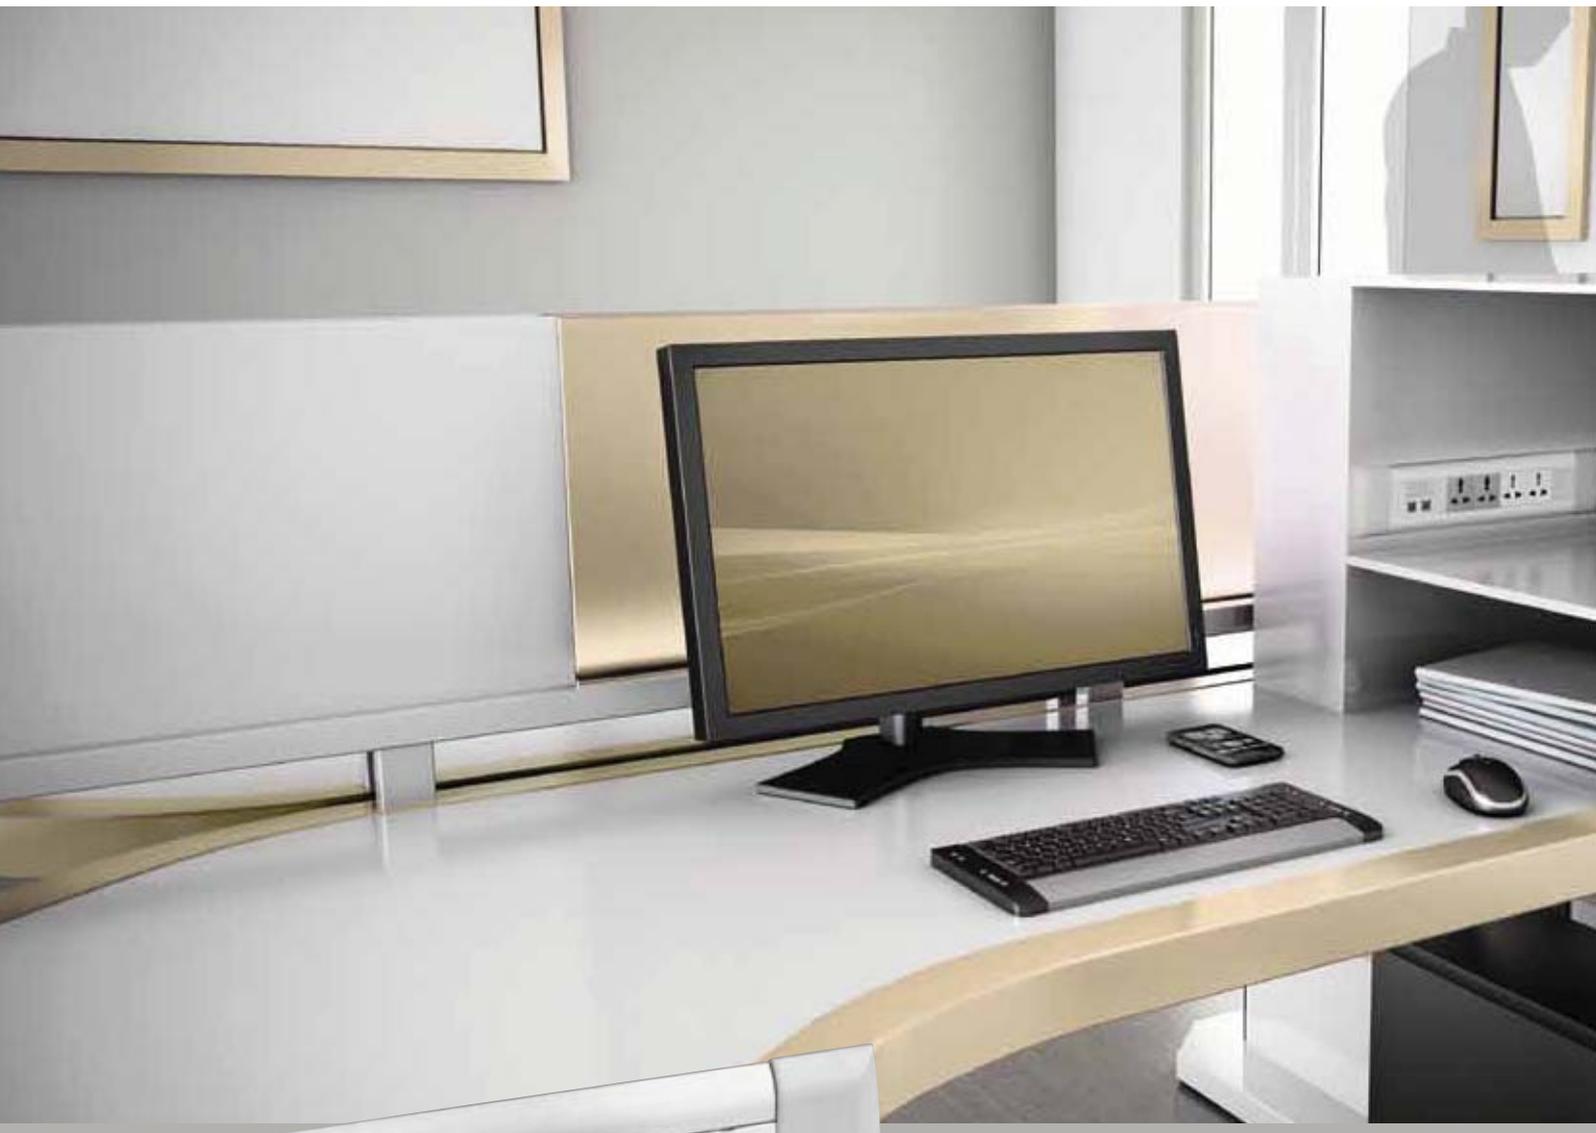

CUSTOMISABLE FUNCTIONS
Modular functions can be adapted to suit requirements



HIGH-QUALITY FINISH
A neat and attractive solution which integrates discreetly into the surrounding decor



FLUSH MOUNTING OFFICE MODULES

Flush-mounting office modules can be installed unobtrusively in any office furniture and configured according to the needs of the user.

This integrated solution provides all high and low current connections within easy reach ensuring maximum user comfort.

flush mounting power and data module



0535 63 with WD



0535 64 with WD



0535 65 with WD


Already to embed solution for all dry support with thickness between 3 and 25 mm.

Conform to standard NFC 61-314 which ensures safety of the user Aesthetic product (no visible screw), thickness of 6mm only.

Product available in 8 and 12 module, with the option of configuring power sockets, data, AV, protection etc.

3 Finishes; white/ black and aluminium

Pack	Cat.Nos	Flush mounting power and data module to be equipped
		Aluminium extensions with cable guide (reversible) To be equipped with Arteor sockets
		8 module; length - 180 mm
1	0535 60	Flush 8 module white finish
1	0535 61	Flush 8 module stainless finish
1	0535 62	Flush 8 module black finish
		12 module; length - 270 mm
1	0535 63	Flush 12 module white finish
1	0535 64	Flush 12 module stainless finish
1	0535 65	Flush 12 module black Finish




flush mounting power & data module

APPLICATION


Flush mounting power & data modules can be installed in dry supports such as :

- partition walls (fixed or mobile) in offices
- in office furniture (horizontally or vertically)

1. Vertically : partition between two desks ; plasterboard...

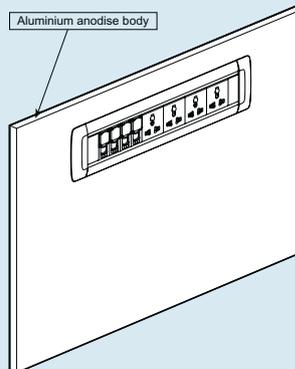


2. Horizontally : desk top ; meeting room table...

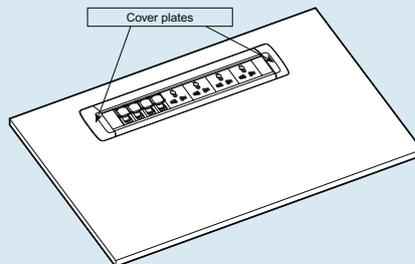

Module to be connected:

Delivered without cord to be connected to screw terminal block.



To be connected with cords :

HO5 VVF 3G 1.5 mm² or 3G 2.5 mm²

HO7 RNF 3G 1.5 mm² or 3G 2.5 mm²


Note: Connection (for power and data) can be done in both sides according to the constraint of the installation site.

INSTALLATION

Cat.Nos 0535 60/61/62/63/64/65

With screws/clamps : Fixes itself on the wall (in the plasterboard) integration in dry wall horizontally or vertically


1 - Cut the wall to fix the module

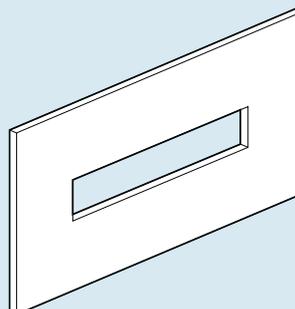


flush mounting power & data module

■ INSTALLATION (Continued)


The flush mounting power & data modules are provided with fixation end caps making it possible to embed the product directly in the wall and to ensure the bending radius of the cable



Embed the complete block in the wall and screw until the module gets fixed.


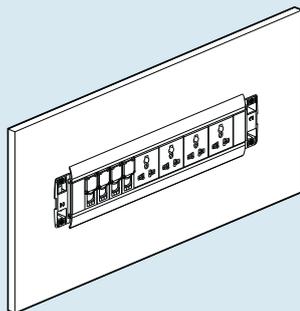


Lastly, to ensure a perfect finishing, clip the cover plate on each end of the product.

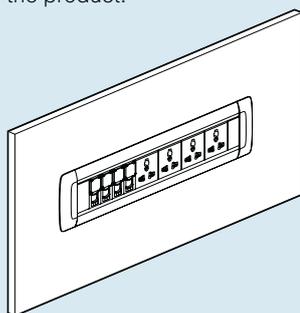

To install the product :

$Y = X + 50\text{mm}$

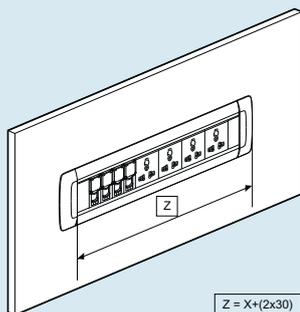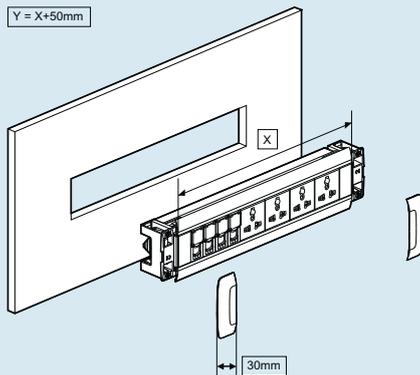

$Z = X + (2 \times 30)$


Dimensions:

	For 8 modules	For 12 modules	Special product
Body (mm)	225	315	X
Y = spacing on hollow wall (mm)	275	365	$Y = X + 50\text{mm}$
Z = total dimension (mm)	285	375	$Z = X + (2 \times 30)$


Note:

8 modules for Cat.Nos 0535 60/61/62
12 modules for Cat.Nos 0535 63/64/65


Dimensions + thickness mini/max:

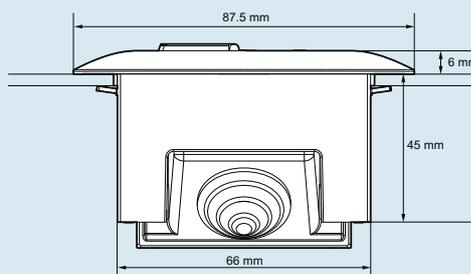

Minimum thickness to install in the wall :

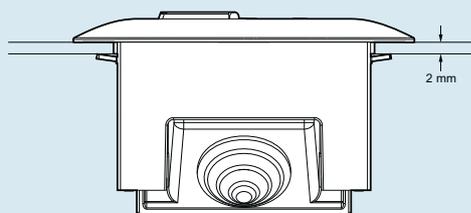


Maximum thickness to install in the wall :

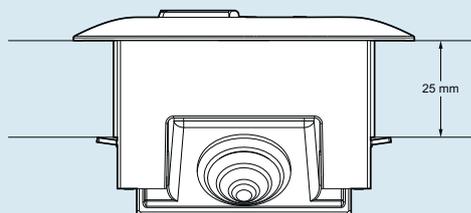

■ TECHNICAL CHARACTERISTICS

Electrical protection :

Earthing of the body : Earthing is necessary only if the module have more than one circuit. Multi-outlets to be wired are equipped with tightener (centres of fixing = 28mm).




End cap with cable clamp integrated for an optimal safety

■ MATERIAL CHARACTERISTICS

Product (body) :
in aluminium (Anodized or White lacquer or Black lacquer)

End caps in ABS grey RAL 7035

Cover plate in ABS white RAL 9003 or Black RAL 9017 or Painted Aluic

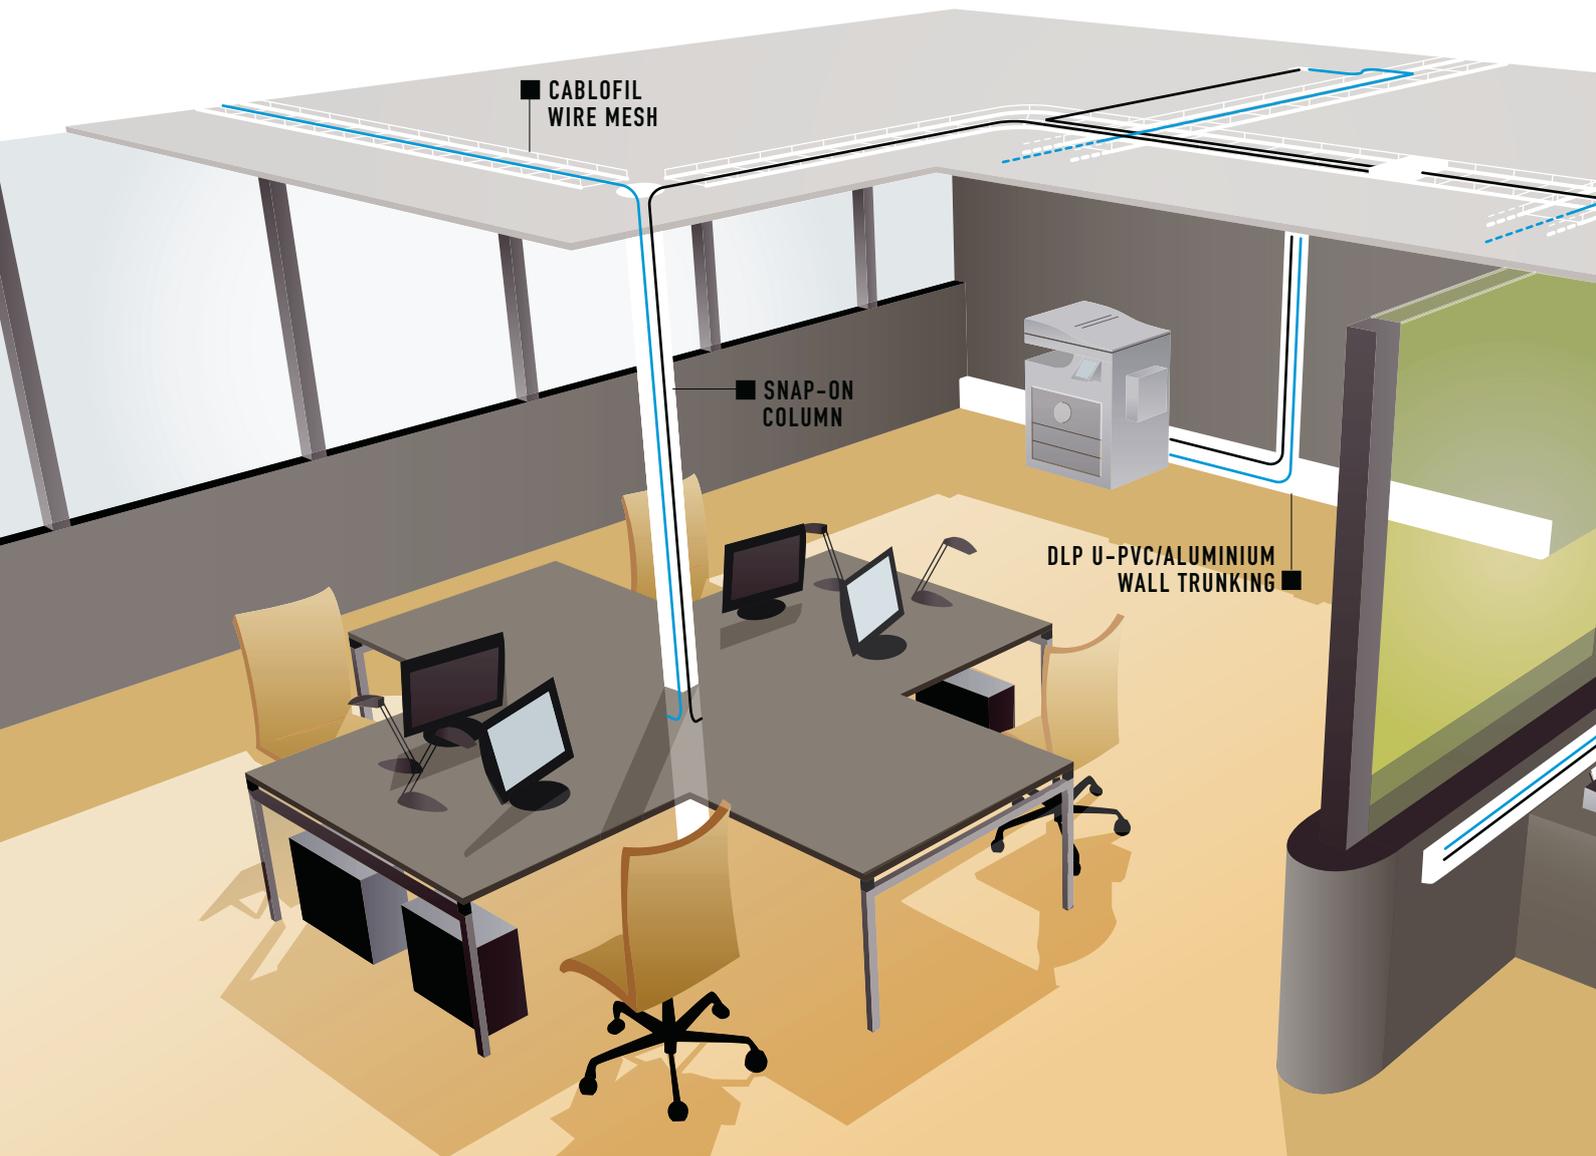

■ DLP WALL TRUNKING SYSTEM

Snap-on trunking system

Available in 5 sizes for routing cables and installing wiring accessories in work areas. Supports any function from the Arteor range by simply clipping directly onto the trunking. Sockets have to be equipped with Soluclip for extra strength.



U-PVC & mini trunking system

Installed with a flexible cover allowing quick installation and access to the compartments for changing configuration according to requirements. Fully compliant with standard EN 50085-2-1 and the RoHS Directive. Supplied complete with cover and dividers.



Aluminium trunking system

Aluminium finish for areas requiring a particularly neat and attractive appearance and design. Strong and resistant material ensuring the installation's longer service life. Available in 1 or 2 compartments, both of which can be equipped with wiring accessories.





■ **SNAP-ON DLP WALL TRUNKING**

WALL AND CEILING SYSTEMS

Quick and easy solution to distribute the data and power through the false ceiling or alongside the walls.

Both solutions offer perfect finish and match the decor with smart range of finishing accessories. To be equipped with Arteor mechanisms.


■ SNAP-ON COLUMNS

To distribute power and data through the false ceiling for supplying 1 to 4 workstations. Ceiling column aluminium body is divided into 1 or 2 compartments to provide optimal separation between power and data.



■ CABLOFIL WIRE MESH CABLE TRAYS

Thanks to Cablofil, cables are constantly accessible and visible for very easy maintenance. Cablofil's structure allows easy cable insertion (for both inlet and outlet) at any point along the route.



snap-on trunking

routing sections and accessories

TRUNKING			TRUNKING AND ACCESSORIES						
Number of compartments	Cover width	Cross-section (mm)	Monobloc: body + cover ⁽¹⁾	Divider	Fishplate body joint	Stick-on body joint	Cover joint	End cap	
SNAP-ON TRUNKING - 45 mm cover									
		50 x 80	○ 0756 01	0756 09	0756 61	0756 66	0756 69	0756 11	
		50 x 105	0756 02	0756 09	0756 62	0756 67	0756 69	0756 12	
		50 x 130	○ 0756 03	-	0756 61	0756 66	2 x 0756 69	0756 13	
		50 x 145	0756 04	-	0756 63	① 0756 66 + ② 0756 67	2 x 0756 69	0756 14	
		50 x 180	0756 06	-	0756 61	0756 66	3 x 0756 69	0756 16	

1: Partition(s) integral to the body
2: Internal and external corner angles supplied with multi-compartment partition joint

mechanisms for snap-on trunking

Mounting functions


The Arteor sockets to be fitted with Soluclip accessory which has following features:

- Anti-slip
- Anti-pullout
- IP 4X
- Perfect finish




0756 90


Installation principle for sockets for snap-on trunking



1 Snap the sockets directly into the trunking




2 Install the covers




3 Disengage the finishing piece


Installation principle for Arteor functions



1 Snap on the mechanism and fix with Soluclips




2 Install the covers




3 Disengage the finishing piece


ANGLES			JUNCTIONS				ACCESSORIES		
Internal angles ⁽²⁾	External angles	Flat angles	Flat junctions with width 80 mm	Flat junctions with width 105 mm	Angled junctions 85/105/ 130 mm	Junction with floor raceways 50 x 12/ 92 x 20	Extra cover	Adaptor for modular wiring accessories	
0756 21	0756 31	0756 41	0756 71	-	0756 81 + 0756 21	0756 88	0756 08	0310 69	
0756 22	0756 32	0756 42	0756 72	0756 76	0756 81 + 0756 22	0756 88	0756 08	0310 69	
0756 23	0756 33	0756 43	0756 71	0756 75	0756 81 + 0756 23	0756 88	0756 08	0310 69	
0756 24	0756 34	0756 44	① 0756 71 + ② 0756 72	① 0756 75 + ② 0756 76	0756 81 + 0756 24	0756 88	0756 08	0310 69	
0756 26	0756 36	0756 36	0756 71	0756 75	0756 81 + 0756 26	0756 88	0756 08	0310 69	




Rotate the finishing piece by 180°




Snap on the finishing piece




An impeccable result



Rotate the finishing piece by 180°



Snap on the finishing piece




An impeccable result


snap-on trunking 45 mm cover 50 x 80 and 50 x 105

routing sections and accessories

Cat.Nos for trunking 50 x 80

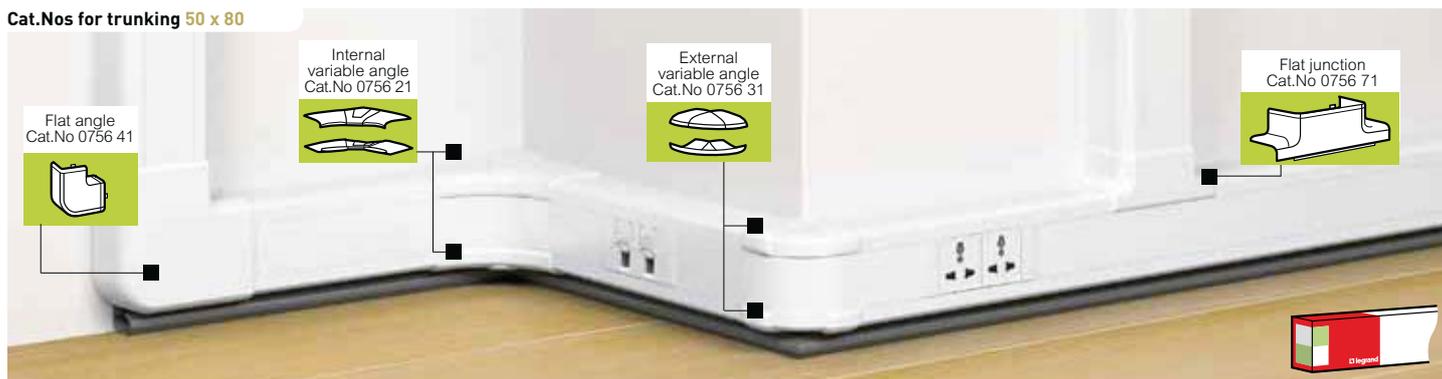


Cat.Nos for trunking 50 x 105

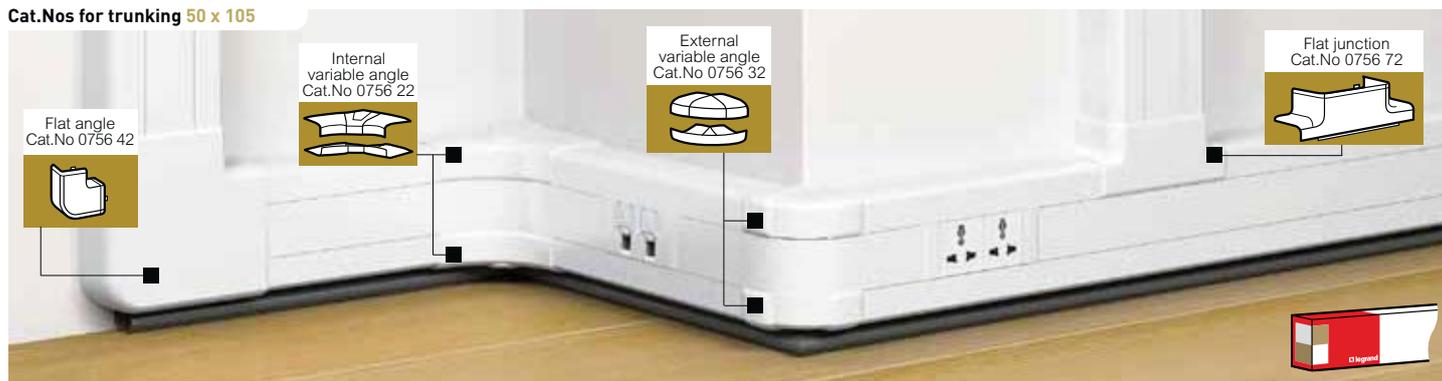

Selection chart (p. 72-73)
Wiring capacity chart (p. 78)

Pack	Cat.Nos		Snap-on trunking
20' 12'	50 x 80 0756 01	50 x 105 0756 02	1-compartment trunking Snap-on trunking Can take any Mosaic or Arteur wiring accessory Includes: - 1 body - 1 cover, width 45 mm Length 2 m
20'	0756 08		Extra cover Width 45 mm Length 2 m
26'	0756 09		Extra partition Divider Length 2 m
10	50 x 80 0756 61	50 x 105 0756 62	Fishplate body joint Used to join 2 bodies and simplifies fixing sections to the wall - set of 2
20	0756 66 0756 67		Joint Stick-on body joint
10	0756 69		Cover joint Cover joint, width 45 mm
24'	0105 80		Height spacer Length 2 m, colour charcoal grey For fitting 15 mm from the ground
10	0756 90		Soluclip accessory For installation with any Mosaic or Arteur function

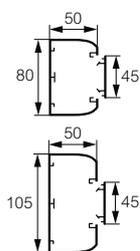

Pack	Cat.Nos		Angles
10	50 x 80 0756 21	50 x 105 0756 22	Internal angle, varies from 80° to 100°
10	0756 31	0756 32	External angle, varies from 85° to 120°
10	0756 41	0756 42	Flat angle at 90°
10	50 x 80 0756 11	50 x 105 0756 12	End caps Left or right end cap
5	50 x 80 0756 71	50 x 105 0756 72	Flat junctions With 80 mm wide sections Creates a junction with snap-on trunking 50 x 80 mm
5		50 x 105 0756 76	With 105 mm wide sections Creates a junction with snap-on trunking 50 x 105 mm
5	0756 81		Angled junction Creates a junction in an internal angle with snap-on trunking 50 x 80 mm, 50 x 105 mm, 50 x 130 mm Must be used in conjunction with internal angle
5	0756 88		Junction with floor raceways Creates a junction with a floor raceways size 50 x 12 mm or 92 x 20 mm

1: Number of metres in pack


Bold catalogue numbers are products normally available with Legrand (India) stockists.
Cat. nos. that are not bold - delivery within 4 - 8 weeks from the date of order.

Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) stockists in multiples of the same.

snap-on trunking 45 mm cover 50 x 130 and 50 x 145

routing sections and accessories

Cat.Nos for trunking 50 x 130

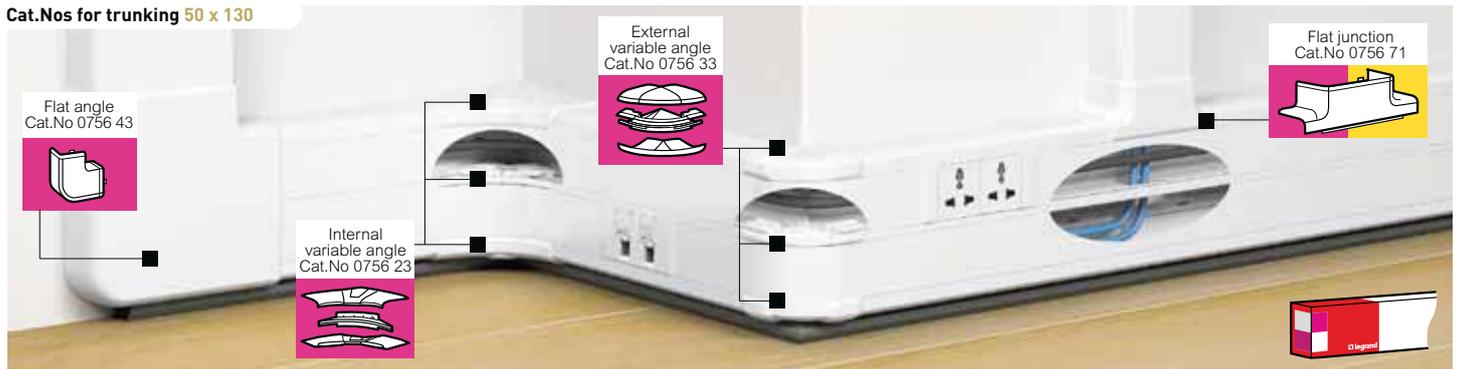

Cat.Nos for trunking 50 x 145



Selection chart (p. 72-73)
Wiring capacity chart (p. 78)

Pack	Cat.Nos	Snap-on trunking	Angles															
12' 8'	50 x 130 0756 03 50 x 145 0756 04	2-compartment trunking Snap-on trunking Can take any Mosaic or Arteor wiring accessory Includes: - 1 body with 2 compartments - 2 covers, width 45 mm Length 2 m	<table border="1"> <thead> <tr> <th>Pack</th> <th>Cat.Nos</th> <th>Angles</th> </tr> </thead> <tbody> <tr> <td>5</td> <td>50 x 130 0756 23 50 x 145 0756 24</td> <td> Internal angle, varies from 80° to 100°</td> </tr> <tr> <td>5</td> <td>0756 33 0756 34</td> <td> External angle, varies from 85° to 120°</td> </tr> <tr> <td>5</td> <td>0756 43 0756 44</td> <td> Flat angle at 90°</td> </tr> </tbody> </table>	Pack	Cat.Nos	Angles	5	50 x 130 0756 23 50 x 145 0756 24	Internal angle, varies from 80° to 100°	5	0756 33 0756 34	External angle, varies from 85° to 120°	5	0756 43 0756 44	Flat angle at 90°			
Pack	Cat.Nos	Angles																
5	50 x 130 0756 23 50 x 145 0756 24	Internal angle, varies from 80° to 100°																
5	0756 33 0756 34	External angle, varies from 85° to 120°																
5	0756 43 0756 44	Flat angle at 90°																
20'	0756 08	Extra cover Width 45 mm Length 2 m	<table border="1"> <thead> <tr> <th>Pack</th> <th>Cat.Nos</th> <th>End caps</th> </tr> </thead> <tbody> <tr> <td>5</td> <td>50 x 130 0756 13 50 x 145 0756 14</td> <td> Left or right end cap</td> </tr> </tbody> </table>	Pack	Cat.Nos	End caps	5	50 x 130 0756 13 50 x 145 0756 14	Left or right end cap									
Pack	Cat.Nos	End caps																
5	50 x 130 0756 13 50 x 145 0756 14	Left or right end cap																
10	50 x 130 0756 61 50 x 145 0756 63	Fishplate body joint Used to join 2 bodies and simplifies fixing sections to the wall - set of 2	<table border="1"> <thead> <tr> <th>Pack</th> <th>Cat.Nos</th> <th>Flat junctions</th> </tr> </thead> <tbody> <tr> <td>5</td> <td>50 x 130 0756 71 50 x 145 0756 72</td> <td>For 80 mm wide downward trunking Creates a junction with snap-on trunking 50 x 80 mm</td> </tr> <tr> <td>5</td> <td>0756 71</td> <td>For 80 mm wide upward trunking Creates a junction with snap-on trunking 50 x 80 mm</td> </tr> <tr> <td>5</td> <td>0756 75 0756 76</td> <td>For 105 mm wide downward trunking Creates a junction with snap-on trunking 50 x 105 mm</td> </tr> <tr> <td>5</td> <td>0756 75</td> <td>For 105 mm wide upward trunking Creates a junction with snap-on trunking 50 x 105 mm</td> </tr> </tbody> </table>	Pack	Cat.Nos	Flat junctions	5	50 x 130 0756 71 50 x 145 0756 72	For 80 mm wide downward trunking Creates a junction with snap-on trunking 50 x 80 mm	5	0756 71	For 80 mm wide upward trunking Creates a junction with snap-on trunking 50 x 80 mm	5	0756 75 0756 76	For 105 mm wide downward trunking Creates a junction with snap-on trunking 50 x 105 mm	5	0756 75	For 105 mm wide upward trunking Creates a junction with snap-on trunking 50 x 105 mm
Pack	Cat.Nos	Flat junctions																
5	50 x 130 0756 71 50 x 145 0756 72	For 80 mm wide downward trunking Creates a junction with snap-on trunking 50 x 80 mm																
5	0756 71	For 80 mm wide upward trunking Creates a junction with snap-on trunking 50 x 80 mm																
5	0756 75 0756 76	For 105 mm wide downward trunking Creates a junction with snap-on trunking 50 x 105 mm																
5	0756 75	For 105 mm wide upward trunking Creates a junction with snap-on trunking 50 x 105 mm																
20	0756 66	Stick-on body joint For top part of body	<table border="1"> <thead> <tr> <th>Pack</th> <th>Cat.Nos</th> <th>Angled junction</th> </tr> </thead> <tbody> <tr> <td>5</td> <td>0756 81</td> <td> Creates a junction in an internal angle with snap-on trunking 50 x 80 mm, 50 x 105 mm, 50 x 130 mm Must be used in conjunction with internal angle</td> </tr> </tbody> </table>	Pack	Cat.Nos	Angled junction	5	0756 81	Creates a junction in an internal angle with snap-on trunking 50 x 80 mm, 50 x 105 mm, 50 x 130 mm Must be used in conjunction with internal angle									
Pack	Cat.Nos	Angled junction																
5	0756 81	Creates a junction in an internal angle with snap-on trunking 50 x 80 mm, 50 x 105 mm, 50 x 130 mm Must be used in conjunction with internal angle																
20	50 x 145 0756 67	Stick-on body joint For bottom part of body	<table border="1"> <thead> <tr> <th>Pack</th> <th>Cat.Nos</th> <th>Junction with floor raceways</th> </tr> </thead> <tbody> <tr> <td>5</td> <td>0756 88</td> <td> Creates a junction with a floor raceways size 50 x 12 mm or 92 x 20 mm</td> </tr> </tbody> </table>	Pack	Cat.Nos	Junction with floor raceways	5	0756 88	Creates a junction with a floor raceways size 50 x 12 mm or 92 x 20 mm									
Pack	Cat.Nos	Junction with floor raceways																
5	0756 88	Creates a junction with a floor raceways size 50 x 12 mm or 92 x 20 mm																
10	0756 69	Cover joint Cover joint, width 45 mm																
24'	0105 80	Height spacer Length 2 m, colour charcoal grey For fitting 15 mm from the ground																
10	0756 90	Soluclip accessory For installation with any Mosaic or Arteor function																


1: Number of metres in pack

Bold catalogue numbers are products normally available with Legrand (India) stockists.
Cat. nos. that are not bold - delivery within 4 - 8 weeks from the date of order.
Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) stockists in multiples of the same.

snap-on trunking 45 mm cover 50 x 180

routing sections and accessories

Cat.Nos for trunking 50 x 180

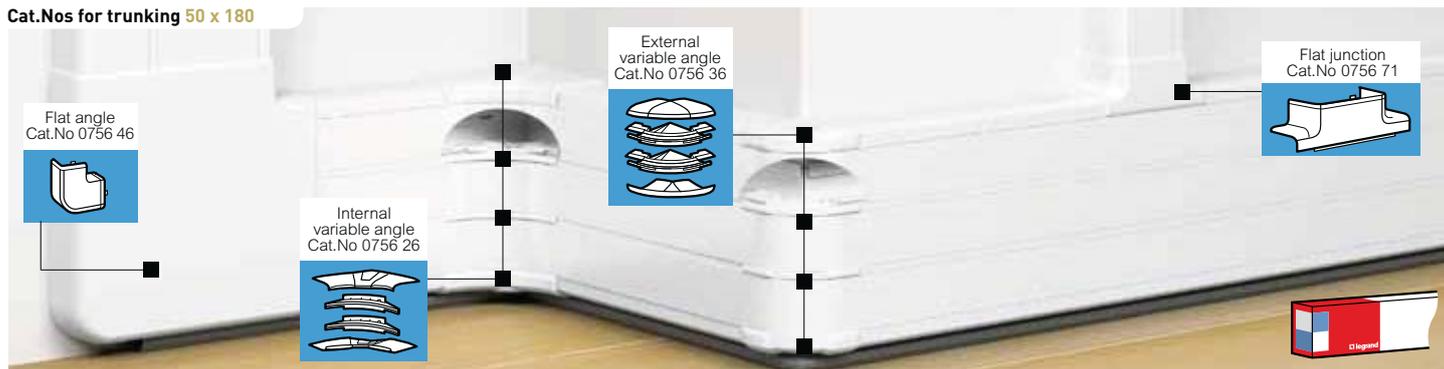

Example of installation:
One current type per compartment




Example of installation:
Wiring accessories in central compartment and distribution in side compartments



Selection chart (p. 72-73)
Wiring capacity chart (p. 78)

Pack	Cat.Nos	Snap-on trunking
8 ¹	50 x 180 0756 06	3-compartment trunking Snap-on trunking Can take any Mosaic or Arteor wiring accessory Includes: - 1 body with 3 compartments - 3 flexible covers, width 45 mm Length 2 m
20 ¹	0756 08	Extra cover Width 45 mm Length 2 m
10	0756 61	Fishplate body joint Used to join 2 bodies and simplifies fixing sections to the wall - set of 2
20	0756 66	Stick-on body joints For top part of body
10 ¹	0756 69	Cover joint Cover joint, width 45 mm
24	0105 80	Height spacer Length 2 m, colour charcoal grey For fitting 15 mm from the ground
10	0756 90	Soluclip accessory For installation with any Mosaic or Arteor function



Pack	Cat.Nos	Angles
5	50 x 180 0756 26	Internal angle, varies from 80° to 100°
5	0756 36	External angle, varies from 85° to 120°
5	0756 46	Flat angle at 90°
5	0756 16	End cap Left or right end cap
5	0756 71	Flat junctions With 80 mm wide sections Creates a junction with snap-on trunking 50 x 80 mm
5	0756 75	With 105 mm wide sections Creates a junction with snap-on trunking 50 x 105 mm
5	0756 81	Angled junction Creates a junction in an internal angle with snap-on trunking 50 x 80 mm, 50 x 105 mm, 50 x 130 mm Must be used in conjunction with internal angle
5	0756 88	Junction with floor raceways Creates a junction with a floor raceways size 50 x 12 mm or 92 x 20 mm

1: Number of metres in pack

Bold catalogue numbers are products normally available with Legrand (India) stockists.
Cat. nos. that are not bold - delivery within 4 - 8 weeks from the date of order.

Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) stockists in multiples of the same.

snap-on trunking

■ New standard EN 50085-2-1

Standard EN 50085-2-1 concerns electrical trunking systems for installation on walls or on the ceiling

This new system standard proposes a tiered classification which allows performance to be adapted to the target applications

To satisfy the requirements of NF C 15-100, Legrand has conformed to the current specifications of NF C 68-104 in terms of both performance and level of functions provided by the system

To this end, our installation trunking (which carries electrical wiring accessories) is type 1 in the new standard

Classification of snap-on trunking

New standard EN 50085-2-1		Level
6.1	Void	
6.2	Resistance to impact for installation and application	2.0 J
6.3	Minimum storage and transport temperature	- 25 °C
6.3	Minimum installation and application temperature	- 5 °C
6.3	Maximum application temperature	+ 60 °C
6.4	Resistance to flame propagation	Non-flame propagating
6.5	Electrical continuity characteristic	Without electrical continuity characteristic
6.6	Electrical insulating characteristic	With electrical insulating characteristic
6.7	Degrees of protection provided by enclosure	IP 40
6.9	The system access cover retention	With a tool
6.101	The position when surface mounted	Wall fixed Ceiling fixed Wall fixed and supported by the floor or other horizontal surface
6.102	Prevention of contact between liquids and insulated conductors and live parts in case of CTS/CDS mounted in a skirting position and wet-treatment of floor	Instructions restricting the installation position
6.103	The functions provided	Type 1
Rated current		500 V
Against mechanical shocks		IK 07

Composition and functions for snap-on trunking

Size (mm)	Number of compartments	Cover	Monobloc: body + cover	Cross-section (mm ²)
White				
50 x 80  Cat.No 0756 01	1 compartment	1 x 45	0756 01	2934
50 x 105  Cat.No 0756 02	1 compartment	1 x 45	0756 02	4098
50 x 130  Cat.No 0756 03	2 compartments	2 x 45	0756 03	2442/2442
50 x 145  Cat.No 0756 04	2 compartments	2 x 45	0756 04	2442/3024
50 x 180  Cat.No 0756 06	3 compartments	3 x 45	0756 06	2442/1950/2442

1. Classification and performance are for a mounting at an angle of 90°.
2. See mounting and assembling instructions on technical sheets, boxes.

■ Wiring capacity

Size (mm)	Number of compartments	Cover width	Cross-section	Capacity	Ømax.	1.5 mm ²	2.5 mm ²	4 mm ²	6 mm ²	3 x 1.5 mm ²	3 x 2.5 mm ²	UTP & FTP Cat.6
50 x 80 Cat.No 0756 01	1 compartment	45	2934	Max.	38	177	131	115	85	26	19	58
			1564	with sockets for trunking		94	70	61	45	13	10	31
			1604	with LEXIC support		97	72	63	46	14	10	32
50 x 105 Cat.No 0756 02	1 compartment	45	4098	Max.	38	248	184	161	119	36	26	81
			2728	with sockets for trunking		165	122	107	79	24	17	54
			2768	with LEXIC support		167	124	109	80	24	18	55
50 x 130 Cat.No 0756 03	2 compartments	45	2442	Max.	38	148	109	96	71	21	16	48
			1072	with sockets for trunking		65	48	42	31	9	7	21
			1112	with LEXIC support		67	50	43	32	9	7	22
		45	2442	Max.		148	109	96	71	21	16	48
			1072	with sockets for trunking		65	48	42	31	9	7	21
			1112	with LEXIC support		67	50	43	32	9	7	22
50 x 145 Cat.No 0756 04	2 compartments	45	2442	Max.	38	148	109	96	71	21	16	48
			1072	with sockets for trunking		65	48	42	31	9	7	21
			1112	with LEXIC support		67	50	43	32	9	7	22
		45	3024	Max.	38	183	135	119	88	26	19	60
			1654	with sockets for trunking		100	74	65	48	14	10	33
			1694	with LEXIC support		102	76	66	49	15	11	33
50 x 180 Cat.No 0756 06	3 compartments	45	2442	Max.	38	148	109	96	71	21	16	48
			1072	with sockets for trunking		65	48	42	31	9	7	21
			1112	with LEXIC support		67	50	43	32	9	7	22
		45	1950	Max.	38	118	87	76	56	17	12	38
			580	with sockets for trunking		35	26	22	16	5	3	11
			620	with LEXIC support		37	27	24	18	5	4	12
		45	2442	Max.	38	148	109	96	71	21	16	48
			1072	with sockets for trunking		65	48	42	31	9	7	21
			1112	with LEXIC support		67	50	43	32	9	7	22

■ Choice and installation of junctions

Size (mm)	Horizontal trunking	Vertical trunking	Flat junctions	Angled junctions	Flat junctions	Angled junctions	Angled junctions
			50 x 80 mm		50 x 105 mm		50 x 130 mm
White							
50 x 80 Cat.No 0756 01	1 compartment		0756 71	0756 81 + 0756 21	-	0756 81 + 0756 21	0756 81 + 0756 21
50 x 105 Cat.No 0756 02	1 compartment		0756 72	-	0756 76	0756 81 + 0756 22	0756 81 + 0756 22
50 x 130 Cat.No 0756 03	2 compartments		0756 71	0756 81 + 0756 23	-	0756 81 + 0756 23	0756 81 + 0756 23
50 x 145 Cat.No 0756 04	2 compartments		0756 71 (upward) 0756 72 (downward)	0756 81 + 0756 24	0756 75 (upward) 0756 76 (downward)	0756 81 + 0756 24	0756 81 + 0756 24
50 x 180 Cat.No 0756 06	3 compartments		0756 71	0756 81 + 0756 26	-	0756 81 + 0756 26	0756 81 + 0756 26

Full of functions for installing in all supports

WIRING ACCESSORIES

ARTEOR™ STANDARD FUNCTIONS Power and data sockets



Multistandard socket



RJ 11



RJ 45



6A multistandard socket

ARTEOR™ PROTECTION FUNCTIONS



RCBO



Thermal magnetic proximity MCB

ARTEOR™ AUDIO AND VIDEO SOCKETS



2 x female RCA



3.5 mm Jack



Female HD 15



Female HD15 + jack

ARTEOR™ ADVANCED FUNCTIONS

For mobile use
e.g. in meeting rooms and reception areas...



Ethernet switch



Wi-Fi access point

MYRIUS™ STANDARD FUNCTIONS / AUDIO AND VIDEO SOCKETS*



6A socket



RJ 11



RJ 45



2 x female RCA



Female HD15 + jack

*Compatible with floor box for screed & raised floor & with pop up box and DHM.

DLP U-PVC adaptable trunking systems for installations base, covers, partitions, finishing accessories and mounting wiring accessories

Selection chart for Installation of trunking, Accessories and Arteor™

Trunking			Covers		Clip on partition		Arteor™ frames				
Number of compartments	Cover(s) width	Section (mm)	Flexible	Partitions separation	Plastic	Aluminium	1 module	2 module	3 module	4 module	6 module
0104 12	1 1 x 65	80 x 50	0105 21	0105 82	-	-	-	0109 21	0109 31	0109 41	0109 61
0104 22	1 1 x 85	105 x 50	0105 22	0105 82	-	-	-	0109 22	0109 32	0109 42	0109 62
	2 2 x 40		0105 20	0105 82	0104 72	0111 06	0109 10	-	-	-	-
0104 32	1 1 x 130	150 x 50	0105 24	0105 82	-	-	-	-	-	-	-
	2 2 x 65		0105 21	0105 82	0104 72	0111 06	-	0109 21	0109 31	0109 41	0109 61
	2 1 x 40 + 1 x 85		0105 20 + 0105 22	0105 82	0104 72	0111 06	0109 10	0109 22	0109 32	0109 42	0109 62
	3 3 x 40		0105 20	0105 82	0104 72 x 2	0111 06 x 2	0109 10	-	-	-	-
0104 52	1 1 x 180	195 x 50	0105 26	0105 82	-	-	-	-	-	-	-
	2 2 x 85		0105 22	0105 82	0104 72	0111 06	-	0109 22	0109 32	0109 42	0109 62
	2 1 x 40 + 1 x 130		0105 20 + 0105 24	0105 82	0104 72	0111 06	0109 10	-	-	-	-
	3 1 x 85 + 2 x 40		0105 22 + 0105 20	0105 82	0104 72 x 2	0111 06 x 2	0109 10	0109 22	0109 32	0109 42	0109 62
	3 1 x 40 + 2 x 65		0105 20 + 0105 21	0105 82	0104 72 x 2	0111 06 x 2	0109 10	0109 21	0109 31	0109 41	0109 61
	4 4 x 40		0105 20	0105 82	0104 72 x 3	0111 06 x 3	0109 10	-	-	-	-

Selection chart for Installation trunking, Accessories and Arteor™

Section (mm)	Wall crossing	Capacity change to increase height of trunking	Partition junction for capacity change	Cable tie base	Insulating unit for Arteor™ modules		Earth Link
					2 module can be added to get 4/6 module	3 module	
80 x 50 / 105 x 50	0106 98	0106 87 +	0106 89	0308 81	0109 27	0109 37	0111 88
150 x 50 / 195 x 50	0106 99	0106 88					

Bold catalogue numbers are products normally available with Legrand (India) stockists.
Cat.Nos that are not bold - delivery within 4 - 8 weeks from the date of order.

Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) stockists in multiples of the same.

Selection chart for Installation of trunking, Additional accessories

Cover	Bases		Internal angles 80° - 100°			External angles 60° - 120			Flat angles		Flat junction			Clips
	Joint for covers	Base joint	End caps	Angles	Partition junction	VDI access.	Angles	Partition junction	VDI access.	Angles	VDI access.	Angles	Partition junction	
0108 01	0106 91	0107 22	0106 02	-	0107 80	0106 22	-	0107 81	0107 67	0107 82	0107 32	-	0107 83	0106 82
0108 02	0106 91	0107 02	0106 02	-	0107 80	0106 22	-	0107 81	0107 85	0107 82	0107 32	-	0107 83	0106 82
0108 00	0106 91	0107 02	0106 02	0106 11	-	0106 22	0106 32	-	-	-	0107 32	0107 42	-	0106 82
0108 04	0106 91	0107 06	0106 02	-	-	0106 22	-	-	0107 89	-	0107 32	-	-	0106 86
0108 01	0106 91	0107 06	0106 02	0106 11	0107 80	0106 22	0106 32	0107 81	0107 89	0107 82	0107 32	0107 42	0107 83	0106 82
0108 02	0106 91	0107 06	0106 02	0106 11	0107 80	0106 22	0106 32	0107 81	0107 89	0107 82	0107 32	0107 42	0107 83	0106 82
0108 00	0106 91	0107 06	0106 02	0106 11 x 2	-	0106 22	0106 32 x 2	-	0107 89	-	0107 32	0107 42	-	0106 82
0108 06	0106 91	0107 07	0106 02	-	-	0106 22	-	-	0107 92	-	0107 32	-	-	0106 86
0108 02	0106 91	0107 07	0106 02	0106 11	0107 80	0106 22	0106 32	0107 81	0107 92	0107 82	0107 32	0107 42	0107 83	0106 82
	0106 91	0107 07	0106 02	0106 11	0107 80	0106 22	0106 32	0107 81	0107 92	0107 82	0107 32	0107 42	0107 83	
	0106 91	0107 07	0106 02	0106 11 x 2	0107 80	0106 22	0106 32 x 2	0107 81	0107 92	0107 82	0107 32	0107 42	0107 83	0106 82
	0106 91	0107 07	0106 02	0106 11 x 2	0107 80	0106 22	0106 32 x 2	0107 81	0107 92	0107 82	0107 32	0107 42	0107 83	0106 82
0108 00	0106 91	0107 07	0106 02	0106 11 x 3	-	0106 22	0106 32 x 3	-	0107 92	-	0107 32	0107 42	-	0106 82

DLP U-PVC mini trunking systems for cable distribution

■ Selection chart for DLP mini trunking

		Length	Finishing Accessories				Junction Elements
WHITE		2 m	End cap	Internal angle	External angle	Flat angle	Flat junction
32 x 12.5		0300 15	0312 03	0302 51	0302 51	0302 53	0302 54
32 x 16		0308 04	0312 07	0333 25	0333 25	0333 27	0333 30
32 x 20		0300 17	0312 09	0302 71	0302 71	0302 73	0302 74


■ Carrying capacity

Cat nos. without partition	Maximum X-section in mm ²	Number of conductors				Cable Ø max. in mm
0300 15 32 x 12.5 mm	285	19	12	10	4	2 x 10
0308 04 32 x 16 mm	330	25	16	15	7	13
0300 17 32 x 20 mm	500	34	22	19	11	18



Cable-grip

It makes the installation easier and faster by containing all the wires inside the trunking body before the cover is clipped

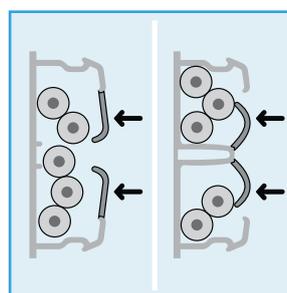

Comfortable implementation

■ During installation, the conductors stay in place in the 1 compartment mini-trunking thanks to cable-grip membranes



Speed of installation


■ Cable holding is integrated with the trunking (no staple to add)
■ Easy conductors position
■ Quick cover fitting

Bold catalogue numbers are products normally available with Legrand (India) stockists.
Cat.Nos that are not bold - delivery within 4 - 8 weeks from the date of order.

Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) stockists in multiples of the same.

DLP U-PVC trunking system 32 x 12.5, 32 x 16 and 32 x 20

mini-trunking system

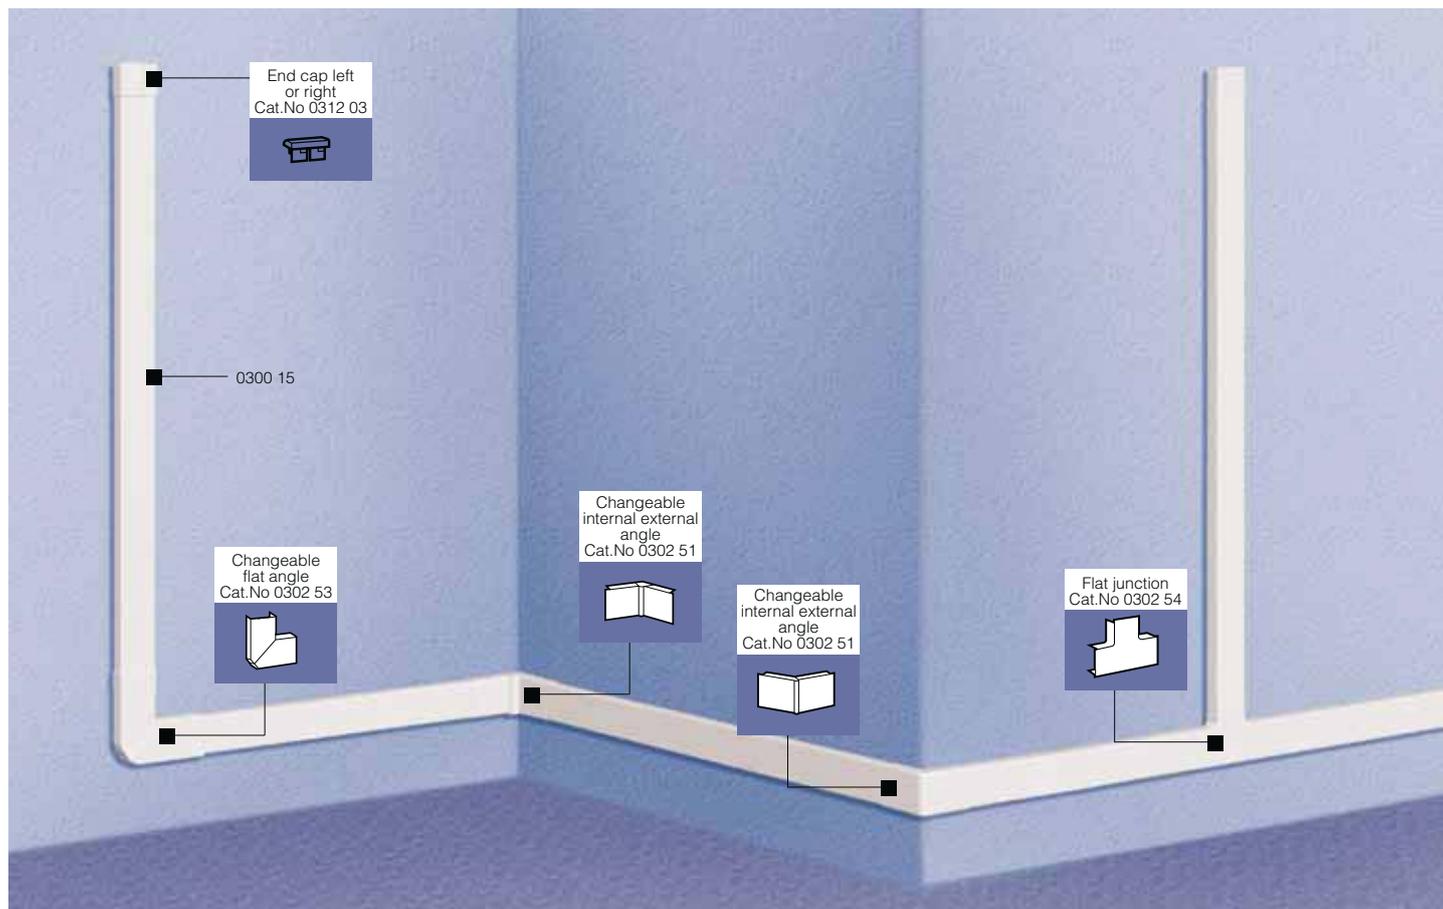

Wiring capacity chart (p. 92)
Selection chart (p. 80-82)

White RAL 9010
Factory finish
Uniform grip and thickness throughout the length
System with independent cover
Conforms to NF C 68-104

Pack	Cat.Nos	Mini-trunking - 32 x 12.5 mm	
80 ⁽¹⁾	0300 15	Without central partition Length 2 m	

Pack	Cat.Nos	Finishing accessories	
20/400	0312 03	End cap right or left	
10/100	0302 51	Changeable internal-external angle from 60° to 120°	
10/100	0302 53	Changeable flat angle from 85° to 95°	
10/200	0302 54	Flat junction	

Pack	Cat.Nos	Mini-trunking - 32 x 16 mm	
60 ⁽¹⁾	0308 04	Without central partition Length 2 m	

Pack	Cat.Nos	Finishing accessories	
10/500	0312 07	End cap right or left	
10/100	0333 25	Changeable internal-external angle from 60° to 120°	
10/100	0333 27	Changeable flat angle from 85° to 95°	
10/200	0333 30	Flat junction	

Pack	Cat.Nos	Mini-trunking - 32 x 20 mm	
50 ⁽¹⁾	0300 17	Without partition Length 2 m	

Pack	Cat.Nos	Finishing accessories	
10/200	0312 09	End cap right or left	
10/100	0302 71	Changeable internal-external angle from 60° to 120°	
10/100	0302 73	Changeable flat angle from 85° to 95°	
10/100	0302 74	Flat junction	


⁽¹⁾ Number of meters per pack

⁽¹⁾ Number of meters per pack

Bold catalogue numbers are products normally available with Legrand (India) stockists.
Cat.Nos that are not bold - delivery within 4 - 8 weeks from the date of order.
Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) stockists in multiples of the same.


DLP U-PVC trunking system and accessories 80 x 50

trunking and fittings

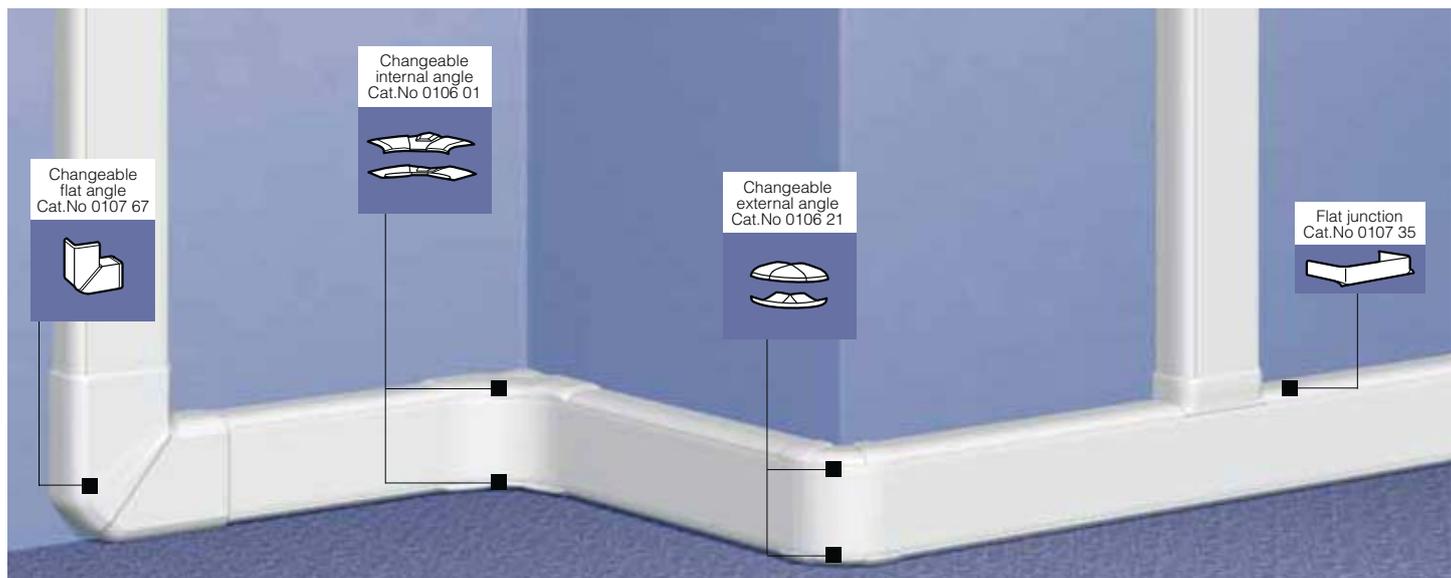

Selection table (p. 80-81)
Cable carrying capacity (p. 92)

Pack	Cat.Nos	Trunking
		Suitable for a wide range of requirements and applications: - Distribution: large wiring capacity and wide access to the wiring space - Installation: can be used with various ranges of wiring accessories - Flexible cover which continuous even on angles - Adjustable internal and external angles - U-PVC trunking
		Bodies Supplied without cover Length 2 m
20 ⁽¹⁾	0104 12	80 x 50 mm
20 ⁽¹⁾	0105 21	Flexible cover (Length 2 m) Fits onto the whole branch including in internal or external angles Full cover width 65 mm
24 ⁽¹⁾	0105 82	Partitions (Length 2 m) Separation partition for 80 x 50 trunking
20/200	0106 91	Joints Body joint, for aligning bases during installation For cover 65 mm width
10/100	0108 01	Cover joint



Pack	Cat.Nos	Angles and end caps
		Internal and external angles Include the 2 components for the top and bottom of the trunking on which the flexible cover is fitted
10/40	0106 02	Internal angle, adjustable from 80° to 100°
10/50	0106 22	External angle, adjustable from 60° to 120°
10	0107 67	Flat angle 90° flat angle
10/50	0107 22	End cap Left or right end cap

Pack	Cat.Nos	Junctions
10	0107 32	Flat junctions to tap-off to a branch smaller than 50 x 105
5/25	0107 35	For specific size tap-off to 80 mm wide branch

Pack	Cat.Nos	Accessories
		Holding cables in place Clip
		VDI accessories
5/50	0107 80	For internal angles
5/50	0107 81	For external angles
5/50	0107 82	For flat angles
5/50	0107 83	For flat junctions
		Additional accessories
5/25	0106 98	Wall crossing
100/1000	0308 81	Cable tie base
20/500	0111 88	Earthing link
		Capacity change Allows to increase 15mm height of trunking to preserve the space of wiring with a flat junction or a support equipment
40	0106 87	Raise, length 57cm
10/100	0106 88	Set of 4 accessories to change capacity of the body
5/50	0106 89	Set of 2 accessories of change height of partition (to be used only on trunking with multi compartments)

(1) Number of meters in pack

DLP U-PVC trunking system and accessories 80 x 50 mounting wiring accessories



Pack	Cat.Nos	Supports for mounting wiring accessories
		Arteor™ supports Clip-on supports which can be fitted side by side Supplied with finishing plate
20	0109 21	 2 modules
5/50	0109 31	 3 modules
10/50	0109 41	 4 modules
5/25	0109 61	 6 modules
10/100	0109 27	 Insulation unit for 2 modules (Arteor™) can be fitted together to create 4/6 module supports
5/50	0109 37	 Insulation unit for 3 modules (Arteor™) supports
		Legrand Lexic support
5	0109 25	 2 modules

NEW DLP TRUNKING SYSTEM

Flexible cover



➤ Within its new concept of flexible cover, DLP stand apart from the rest... a more professional finish in less time

Installation principles

Whether you choose fully assembled or adaptable trunking, the DLP systems are quick and simple to install and provide you with discrete routing of your cables



Flexible cover

This clips onto the whole branch, including in corners: guaranteed to save you time



New accessories

- angled junction
- flat junction
- internal and external angle
- flat angle

These accessories have been optimised to make the system even easier to install

DLP U-PVC trunking system and accessories 105 x 50

trunking and fittings



Selection table (p. 80-81)
Cable carrying capacity (p. 92)

Pack	Cat.Nos	Trunking
		Suitable for a wide range of requirements and applications: - Distribution: large wiring capacity and wide access to the wiring space - Installation: can be used with various ranges of wiring accessories - Flexible cover which continuous even on angles - Adjustable internal and external angles - U-PVC trunking
		Bodies Supplied without cover Length 2 m
20 ⁽¹⁾	0104 22	105 x 50 mm
		Flexible cover (Length 2 m) Fits onto the whole branch including in internal or external angles Full cover width 85 mm Two covers width 40 mm
20 ⁽¹⁾	0105 22	
20 ⁽¹⁾	0105 20	
		Partitions (Length 2 m)
24 ⁽¹⁾	0105 82	Separation partition for 105 x 50 trunking
48 ⁽¹⁾	0104 72	Plastic clip-on partition
12 ⁽¹⁾	0111 06	Aluminium clip-on partition
		Joints
20/200	0106 91	Body joint For aligning bases during installation
10/100	0108 02	Cover joint for 85 mm width
10/100	0108 00	Cover joint for 40 mm width

Pack	Cat.Nos	Angles and end caps
		Internal and external angles Include the 2 components for the top and bottom of the trunking on which the flexible cover is fitted
10/40	0106 02	Internal angle, adjustable from 80° to 100°
10/50	0106 22	External angle, adjustable from 60° to 120°

Pack	Cat.Nos	Angles and end caps (continued)
		Flat angle 90° flat angle
10	0107 85	
		End cap Left or right end cap
20/100	0107 02	
		Junctions
10	0107 32	Flat junction to tap-off a branch smaller than 50 x 105
5/25	0107 35	For tap-off to an 80 mm wide branch
5/25	0107 36	For tap-off to an 105 mm wide branch equipped with an 85 mm cover
		Partion junction
5/50	0106 11	For internal angles
5/50	0106 32	For external angles
5/25	0107 42	For flat angles

Pack	Cat.Nos	Accessories
		Holding cables in place
50	0106 82	Clip
		VDI accessories
5/50	0107 80	For internal angles
5/50	0107 81	For external angles
5/50	0107 82	For flat angles
5/50	0107 83	For flat junctions

(1) Number of meters in pack

Bold catalogue numbers are products normally available with Legrand (India) stockists.
Cat.Nos that are not bold - delivery within 4 - 8 weeks from the date of order.

Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) stockists in multiples of the same.

adaptable DLP trunking 105 x 50




FULLY ASSEMBLED DLP TRUNKING

Save time

Pack	Cat.Nos	Accessories
Additional accessories		
5/25	0106 98	Wall crossing
100/1000	0308 81	Cable tie base
20/500	0111 88	Aluminium earthing link
Capacity Change		
Allows to increase 15mm height of trunking to preserve the space of wiring with a flat junction or a support equipment		
40	0106 87	Raise, length 57cm
10/100	0106 88	Set of 4 accessories to change capacity of the body
5/50	0106 89	Set of 2 accessories of change height of partition (to be used)

Supports for mounting wiring accessories		
Arteor™ supports		
Clip-on supports which can be fitted side by side Supplied with finishing plate		
5/50	0109 10	1 modules - for 40 mm cover
20	0109 22	2 modules - for 85 mm cover
5/50	0109 32	3 modules - for 85 mm cover
20	0109 42	4 modules - for 85 mm cover
10	0109 62	6 modules - for 85 mm cover
10/100	0109 27	Insulation unit for 2 modules (Arteor™) can be fitted together to create 2/4/6 module supports
5/50	0109 37	Insulation unit for 3 modules (Arteor™) supports
Legrand Lexic supports		
5	0109 35	3 modules

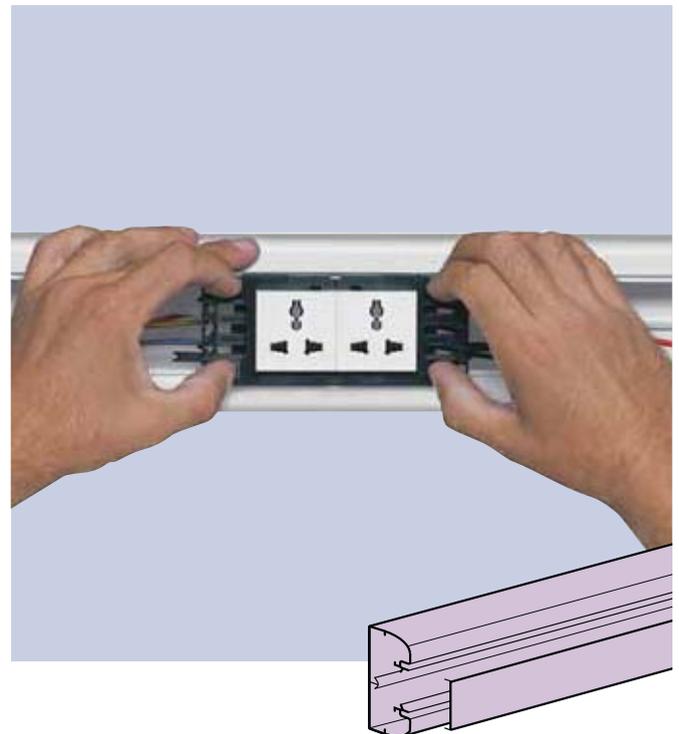

➤ For repetitive and standard installations

➤ To combine with Arteor™ sockets with support for direct mounting on trunking

DLP U-PVC adaptable trunking system and accessories 150 x 50

trunking and fittings



Selection table (p. 80-81)
Cable carrying capacity (p. 92)

Pack	Cat.Nos	Trunking
		Suitable for a wide range of requirements and applications: - Distribution: large wiring capacity and wide access to the wiring space - Installation: can be used with various ranges of wiring accessories - Flexible cover which continuous even on angles - Adjustable internal and external angles - U-PVC trunking
		Bodies Supplied without cover Length 2 m
20 ⁽¹⁾	0104 32	150 x 50 mm
		Flexible cover (Length 2 m) Fits onto the whole branch including in internal or external angles Full cover width 130 mm Full cover width 85 mm Full cover width 65 mm Full cover width 40 mm
8	0105 24	
20	0105 22	
20	0105 21	
20	0105 20	
		Partitions (Length 2 m)
24 ⁽¹⁾	0105 82	Separation partition for 105 x 50 trunking
48	0104 72	Plastic clip-on partition
12	0111 06	Aluminium clip-on partition
		Joints
20/200	0106 91	Body joint For aligning bases during installation
10/100	0108 04	Cover joint for 130 mm width
10/100	0108 02	Cover joint for 85 mm width
10/100	0108 01	Cover joint for 65 mm width
10/100	0108 00	Cover joint for 40 mm width

Pack	Cat.Nos	Angles and end caps
		Internal and external angles Include the 2 components for the top and bottom of the trunking on which the flexible cover is fitted
10/40	0106 02	Internal angle, adjustable from 80° to 100°
10/50	0106 22	External angle, adjustable from 60° to 120°

Pack	Cat.Nos	Angles and end caps (continued)
		Flat angle 90° flat angle
5	0107 89	
		End cap Left or right end cap
10/50	0107 06	
		Junctions
10	0107 32	Flat junction to tap-off a branch smaller than 50 x 105 To tap-off a branch of 150 x 50, use 2 nos of 0107 32 (2 x 0107 32)
5/25	0107 35	To tap-off to an 80 mm wide branch
5/25	0107 36	To a tap-off to a 105 mm wide branch equipped with a 85 mm cover
		Partion junction
5/50	0106 11	For internal angles
5/50	0106 32	For external angles
5/25	0107 42	For flat angles

Pack	Cat.Nos	Accessories
		Holding cables in place
50	0106 86	Clip for 130 mm width cover
50	0106 82	Clip for 65 mm width cover
		VDI accessories
5/50	0107 80	For internal angles
5/50	0107 81	For external angles
5/50	0107 82	For flat angles
5/50	0107 83	For flat junctions

(1) Number of meters in pack

Bold catalogue numbers are products normally available with Legrand (India) stockists.
Cat.Nos that are not bold - delivery within 4 - 8 weeks from the date of order.

Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) stockists in multiples of the same.

adaptable DLP trunking 150 x 50 mounting wiring accessories



FULLY ASSEMBLED U-PVC DLP TRUNKING

Segregation of power and data




Pack	Cat.Nos	Accessories
Additional accessories		
5/25	0106 98	Wall crossing
100/1000	0308 81	Cable tie base
20/500	0111 88	Earthing link
Capacity change		
Allows to increase 15mm height of trunking to preserve the space of wiring with a flat junction or a support equipment		
40	0106 87	Raise, length 57cm
10/100	0106 88	Set of 4 accessories to change capacity of the body
5/50	0106 89	Set of 2 accessories of change height of partition (to be used)

Supports for mounting wiring accessories		
Arteor™ supports		
Clip-on supports which can be fitted side by side Supplied with finishing plate		
5/50	0109 10	1 modules - for 40 mm cover
20	0109 21	2 modules - for 65 mm cover
	0109 22	2 modules - for 85 mm cover
5/50	0109 31	3 modules - for 65 mm cover
	0109 32	3 modules - for 85 mm cover
10/50	0109 41	4 modules - for 65 mm cover
20	0109 42	4 modules - for 85 mm cover
5/25	0109 61	6 modules - for 65 mm cover
10	0109 62	6 modules - for 85 mm cover
10/100	0109 27	Insulation unit for 2 modules (Arteor™) can be fitted together to create 4/6 module supports
5/50	0109 37	Insulation unit for 3 modules (Arteor™) supports
Legrand Lexic supports		
5	0109 25	For 2 modules for 65 mm cover (2 comp.)
5	0109 65	For 6 modules for 130 mm cover (1 comp.)

➤ Possible to have separation by aluminium clip-on partition, minimises the interference on data cable

DLP U-PVC adaptable trunking system and accessories 195 x 50

trunking and fittings

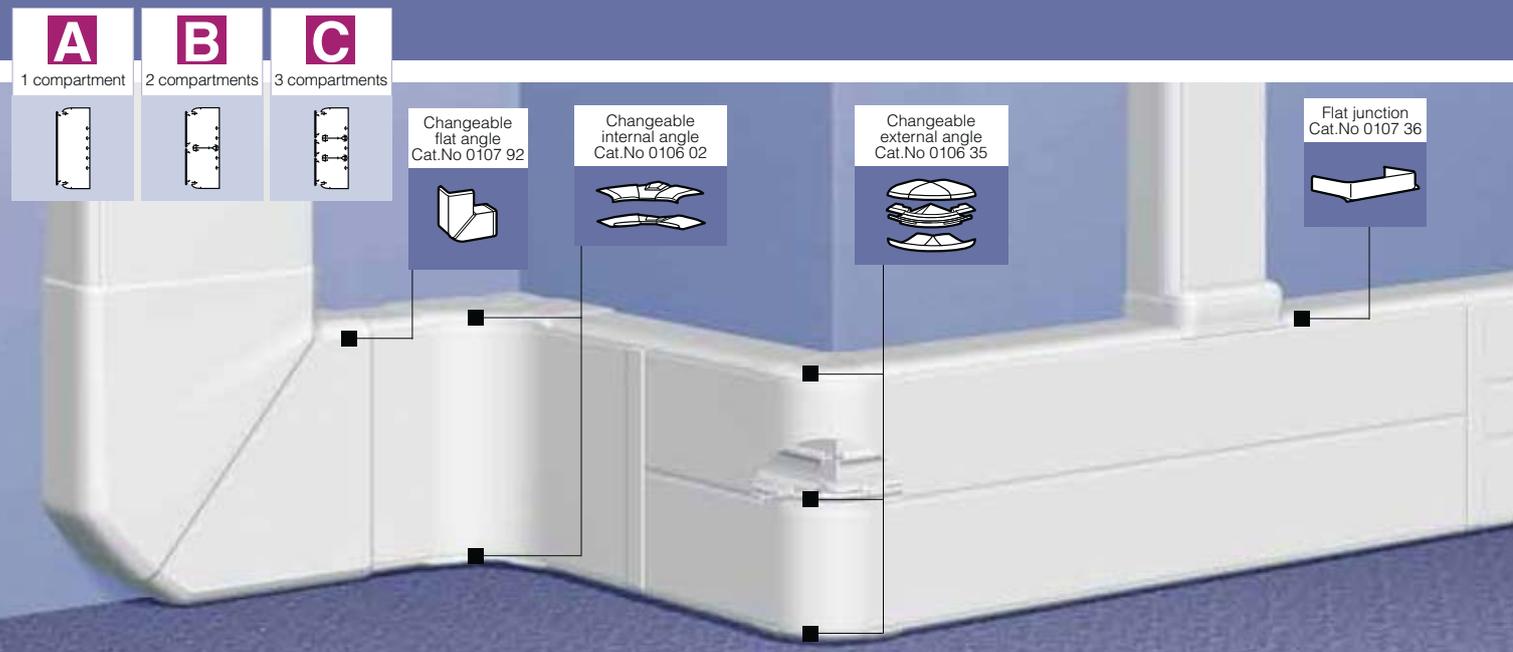

Selection table (p. 80-81)
Cable carrying capacity (p. 92)

Pack	Cat.Nos	Trunking
		Suitable for a wide range of requirements and applications: - Distribution: large wiring capacity and wide access to the wiring space - Installation: can be used with various ranges of wiring accessories - Flexible cover which continuous even on angles - Adjustable internal and external angles
		Bodies Supplied without cover Length 2 m 195 x 50 mm
8 ⁽¹⁾	0104 52	195 50
		Flexible cover (Length 2m) Fits onto the whole branch including in internal or external angles
8 ⁽¹⁾	0105 26	Full cover width 180 mm
20 ⁽¹⁾	0105 22	Full cover width 85 mm
8 ⁽¹⁾	0105 24	Full cover width 130 mm
20 ⁽¹⁾	0105 21	Full cover width 65 mm
20 ⁽¹⁾	0105 20	Full cover width 40 mm
		Partitions (Length 2m)
24 ⁽¹⁾	0105 82	Separation partition for 195 x 50 trunking
48 ⁽¹⁾	0104 72	Plastic clip-on partition
12 ⁽¹⁾	0111 06	Aluminium clip-on partition
		Joints
20/200	0106 91	Body joint For aligning bases during installation
10/100	0108 06	Cover joint for 180 mm width
10/100	0108 02	Cover joint for 85 mm width
10/100	0108 04	Cover joint for 130 mm width
10/100	0108 01	Cover joint for 65 mm width
10/100	0108 00	Cover joint for 40 mm width

Pack	Cat.Nos	Angles and end caps
		Internal and external angles Include the 2 components for the top and bottom of the trunking on which the flexible cover is fitted
10/40	0106 02	Internal angle, adjustable from 80° to 100°
10/50	0106 22	External angle, adjustable from 60° to 120°

Pack	Cat.Nos	Angles and end caps (continued)
2	0107 92	Flat angle 90° flat angle
5/50	0107 07	End cap Left or right end cap
		Junctions
10	0107 32	Flat junction to tap-off a branch smaller than 50 x 105 To tap-off a branch of 150 x 50, use 2 nos of 0107 32 (2 x 0107 32)
5/25	0107 35	To tap-off to an 80 mm wide branch
5/25	0107 36	To a tap-off to a 105 mm wide branch equipped with a 85 mm cover
		Partion junction
5/50	0106 11	For internal angles
5/50	0106 32	For external angles
5/25	0107 42	For flat angles

Pack	Cat.Nos	Accessories
		Holding cables in place
50	0106 86	Clip for 130 mm width cover
50	0106 82	Clip for 40 mm width cover
		VDI accessories
5/50	0107 80	For internal angles
5/50	0107 81	For external angles
5/50	0107 82	For flat angles
5/50	0107 83	For flat junctions

Bold catalogue numbers are products normally available with Legrand (India) stockists.
Cat.Nos that are not bold - delivery within 4 - 8 weeks from the date of order.

Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) stockists in multiples of the same.

adaptable DLP trunking 195 x 50 mounting wiring accessories



Pack	Cat.Nos	Accessories
Additional accessories		
5/25	0106 99	Wall crossing
100/1000	0308 81	Cable tie base
20/500	0111 88	Earthing link
Capacity Change		
Allows to increase 15mm height of trunking to preserve the space of wiring with a flat junction or a support equipment		
40	0106 87	Raise, length 57 cm
10/100	0106 88	Set of 4 accessories to change capacity of the body
5/50	0106 89	Set of 2 accessories of change height of partition (to be used)

Pack	Cat.Nos	Supports for mounting wiring accessories
Legrand Lexic supports		
5	0109 25	For 2 modules for 65 mm cover (3 comp.)
5	0109 35	For 3 modules for 85 mm cover (2 comp.)
10/100	0109 27	Insulation unit for 2 modules (Arteor™) can be fitted together to create 4/6 module supports
5/50	0109 37	Insulation unit for 3 modules (Arteor™) supports

Supports for mounting wiring accessories		
Arteor™ supports		
Clip-on supports which can be fitted side by side Supplied with finishing plate		
5/50	0109 10	1 modules - for 40 mm cover
20	0109 21	2 modules - for 65 mm cover
	0109 22	2 modules - for 85 mm cover
5/50	0109 31	3 modules - for 65 mm cover
	0109 32	3 modules - for 85 mm cover
10/50	0109 41	4 modules - for 65 mm cover
20	0109 42	4 modules - for 85 mm cover
5/25	0109 61	6 modules - for 65 mm cover
10	0109 62	6 modules - for 85 mm cover
10/100	0109 27	Insulation unit for 2 modules (Arteor™) can be fitted together to create 4/6 module supports
5/50	0109 37	Insulation unit for 3 modules (Arteor™) supports

capacity of U-PVC DLP trunking systems for installation

■ New standard EN 50085-2-1

Classification EN 50085-2-1		Level
6.1	Void	
6.2	Resistance to impact for installation and application	2.0 J
6.3	Minimum storage and transport temperature	- 25 °C
6.3	Minimum installation and application temperature	- 5 °C
6.3	Maximum application temperature	+ 60 °C
6.4	Resistance to flame propagation	Non-flame propagating
6.5	Electrical continuity characteristic	Without electrical continuity characteristic
6.6	Electrical insulating characteristic	With electrical insulating characteristic
6.7	Degrees of protection provided by enclosure	IP 40
6.9	System access cover retention	With a tool
6.101	Position when surface mounted	Wall fixed, ceiling fixed, wall fixed and supported by the floor or other horizontal surface
6.102	Prevention of contact between liquids and insulated conductors and live parts in case of CTS/CDS mounted in a skirting position and wet-treatment of floor	Instructions restricting the installation position
6.103	The functions provided	Type 2: 0 104 32/33/52/53, type 3: other Cat.Nos
Rated current		500 V
Against mechanical shocks		IK 07

Type 1, type 2 distribution, type 3 installation

Insulation resistance : all the DLP plastic range (including accessories) insulation resistance superior to 5 megohms

CV : Cover

1 Cross-section in mm² (or diameter for ELV cables) depending on number of conductors

Normal cross-section of cores (mm ²)	Cable									
	1 conductor		2 conductors		3 conductors		4 conductors		5 conductors	
	Usable cross-section (mm ²)	Maximum Ø (mm)	Usable cross-section (mm ²)	Maximum Ø (mm)	Usable cross-section (mm ²)	Maximum Ø (mm)	Usable cross-section (mm ²)	Maximum Ø (mm)	Usable cross-section (mm ²)	Maximum Ø (mm)
1.5	44	6.6	111	10.5	121	11.0	144	12.0	169	13.0
2.5	49	7.0	133	11.5	157	12.5	169	13.0	211	14.5
4	58	7.6	169	13.0	183	13.5	211	14.5	256	16.0
6	68	8.2	196	14.0	225	15.0	256	16.0	307	17.5
10	85	9.2	256	16.0	289	17.0	343	18.5	400	20.0
16	111	10.5	43	18.5	381	19.5	441	21.0	529	23.0
25	157	12.5	484	22.0	553	23.5	651	25.5	784	28.0
35	183	13.5	601	24.5	676	26.0	813	28.5	993	31.5
50	225	15.0	-	-	841	29.0	1 057	32.5	-	-

Example

A - Description :

- 2 cables 3 x 1.5²
- 4 cables 4 x 2.5²
- 10 cables 4 x 4²

B - Calculation of cumulative cable cross-sections : See table 1

	Theoretical cross-section (mm ²)	Practical cross-section (mm ²)
2 cables 3 x 1.5 ²	2 x 121 = 242	
4 cables 4 x 2.5 ²	4 x 169 = 676	
10 cables 4 x 4 ²	10 x 211 = 2 110	
TOTAL	3 028	3 330*

*K (filling factor) = 1.10 Section = 3 028 x 1.10 = **3 330 mm²**

C - Trunking selection See table 2

2 Capacity of trunking (CV : Cover)

	Cross-section (mm ²) Max. Ø (mm ²)	80 x 50		105 x 50			
		CV65	CV40	CV40	CV40	CV85	
Trunking only	Cross-section	3380	1930	1930	4330		
	Max. Ø	40	28	43	28		
With Arteor™ support	Cross-section	1830	1410	1410	2300		
	Max. Ø	2 x 18	2 x 21	2 x 21	2 x 24		

	Cross-section (mm ²) Max. Ø (mm ²)	150 x 50									
		CV40	CV40	CV40	CV65	CV40	CV65	CV65	CV40	CV85	CV130
Trunking only	Cross-section	2000	1570	1570	2000	3020	3020	3020	2000	4020	6470
	Max. Ø	28	28	43	43	2x43	43	28	28	28	
With Arteor™ support	Cross-section	1480	1050	1480	1470	1470	1480	1990	-	-	
	Max. Ø	24	2x17	24	18	18	24	26	-	-	

	Cross-section (mm ²) Max. Ø (mm ²)	195 x 50																	
		CV40	CV40	CV40	CV40	CV65	CV40	CV65	CV65	CV40	CV40	CV85	CV40	CV130	CV40	CV85	CV85	CV180	
Trunking only	Cross-section	2000	1570	1570	2000	3020	1570	3020	3020	2580	2000	2000	3590	2000	6040	2000	4020	4020	8470
	Max. Ø	28	28	28	28	43	28	43	43	42	28	28	42	28	2 x 42	28	43	43	3 x 42
With Arteor™ support	Cross-section	1480	1050	1050	1480	1470	1050	1470	1470	1030	1480	1480	1560	1480	-	1480	1990	1990	-
	Max. Ø	2 x 21	2 x 17	2 x 17	2 x 21	18	2 x 17	18	18	14	2 x 21	2 x 21	2 x 18	2 x 21	-	2 x 21	26	26	-

DLP U-PVC adaptable trunking installation made easy

With its new concept flexible lid, DLP stands apart from the rest... a more professional finish in less time

Installation of external angle



External angles adjustable from 600-1200



Easy to install external angles



External angles accepts flexible continuous cover on to it for professional finish (no cutting required)

Installation of internal angles



Internal angles adjustable from 800-1000



Integrated accessories for superior finish



Internal angles accepts flexible continuous cover on it for professional finish (no cutting required)

Perfect separation between power and data even in the angles



Ideal for VDI



Separation junction for external angle



VDI accessories ensures bending radius required by the standards. Bending radius should be 8 times the diameter of cable

Mounting of cover and body joint



Cover joints in 2 parts with captive links



Secured cover and base joint for superior finish



Zip lock flexible cover


Mounting of Arteor™



Frames to combine with Arteor™ sockets with support for direct mounting on trunking




Cable grip on mounting frame minimize the stress on Arteor™ terminals




Pre marked cutouts for drilling, threaded back for better wall gripping

Isolating boxes for Arteor™ mechanisms



Flat junction for tap-off to a 150, 195 or 220 width profile. For tap-offs to a profile wider than 105, use 2 base junctions (3 to 220 trunking)



Tap-off from bottom compartment As well as the base junction, insert the additional junction. Cat.Nos 107 42/43 (depending on the profile), between 2 partitions to tap off the cables from the bottom compartment



Complete installation for professional finish

Flexible angles, wall crossing accessories, capacity change, cables retention using cable-lie bases... The new DLP trunking system for installation, includes a set of clever accessories to improve installation speed and efficiency.

- Flat angle
- New internal and external angle
- Flat junctions
- Arteor frames
- Base
- Flexible cover
- Separation partition
- Clip-on partition
- Clips
- Base joint
- Joint for cover
- End caps



DLP full aluminium : excellent screening and earthing properties



- > Save time : multi-covers, removable separation, angles ready to use...
- > Ideal for VDI installations



■ To complete already equipped installations with DLP aluminium trunking, use Cat.Nos 0307 10/11/20/21/26/25, on request only

DLP aluminium adaptable trunking system Selection chart

			TRUNKINGS		
			Body	Rigid covers	Separation partitions
Nos of compartments	Cover width (mm)	Size (mm)			
	85 	50 x 105	0111 00	0111 11	0111 08
	130 	50 x 150	0111 02	0111 12	0111 08
	180 	50 x 195	0111 04	0111 13	0111 08
	65 65 	50 x 150	0111 02	2 x 0111 10	-
	85 85 	50 x 195	0111 04	2 x 0111 11	-

**DLP TRUNKING
SYSTEM ALUMINIUM
with aluminium adaptable
DLP trunking,
get better styling too !**






AND FITTINGS									SUPPORTS FOR WIRING ACCESSORIES			
Division partition	End cap	Flat angle	External angle	Internal angle	Flat junction	Body joint	Cover joint	Arteor™ supports				
								2 modules	3 modules	4 modules	6 modules	
-	0111 58	0111 43	0112 32	0112 21	0112 51	0111 66	0111 63	0112 12	0112 13	0112 14	0112 16	
-	0111 60	0111 45	0112 34	0112 42	0112 51	0111 66	0111 64	-	-	-	-	
-	0111 61	0111 47	0112 36	0112 25	0112 51	0111 66	0111 65	-	-	-	-	
0111 06	0111 60	0111 45	0112 34	0112 42	0112 51	0111 66	0111 62	0112 02	0112 03	0112 04	0112 06	
0111 06	0111 61	0111 47	0112 36	0112 25	0112 51	0111 66	0111 63	0112 12	0112 13	0112 14	0112 16	



SAVE TIME


- ☑ Flexibility : multi-covers
- ☑ Removable separation
- ☑ Angles delivered pre-cut, ready to use
- ☑ Fast fixing device support
- ☑ Uniform colours for the entire installation
- ☑ Arteor™ wiring accessories go with aluminium adaptable DLP trunking

DLP aluminium adaptable trunking system 50 x 105

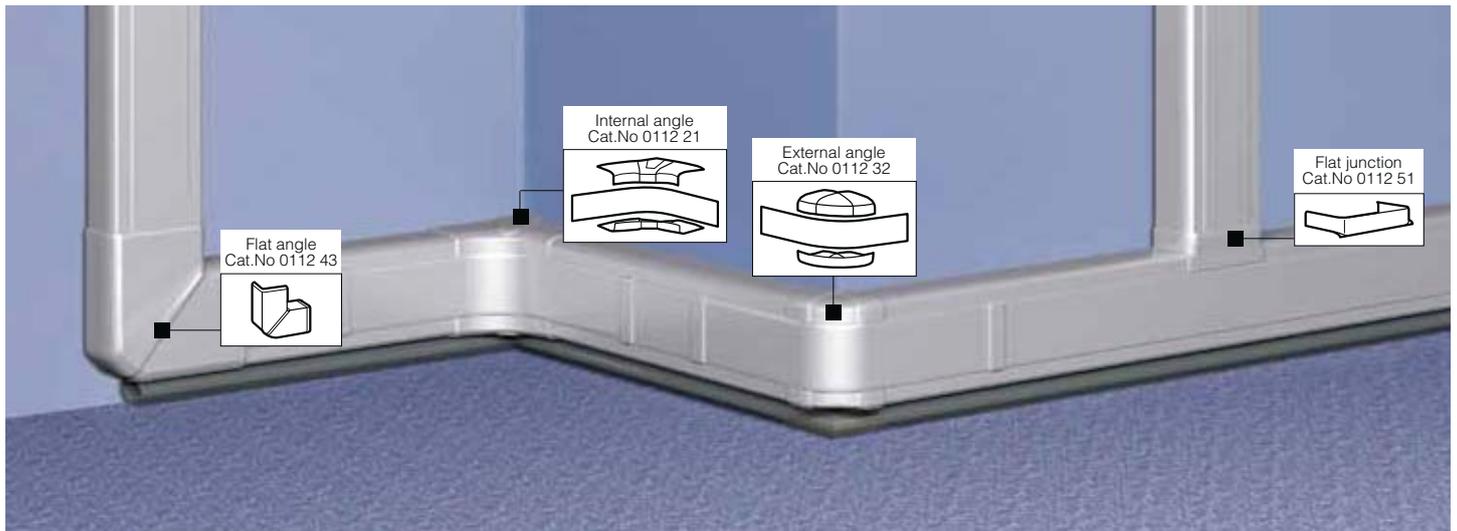

[Wiring capacity chart \(p. 99\)](#)
[Selection table \(p. 94-95\)](#)

Pack	Cat.Nos	Body
8 ⁽¹⁾	50 x 105 111 00	Supplied without cover length 2 m



Pack	Cat.Nos	Cover and partition
16 ⁽¹⁾	0111 11	Full rigid cover 85 mm width
24 ⁽¹⁾	50 x 105 0111 08	Separation partition

Pack	Cat.Nos	Supports for Arteor™ for cover 85 mm width
20	0112 12	2 modules
5/50	0112 13	3 modules
20	0112 14	4 modules
10	0112 16	6 modules

Pack	Cat.Nos	Finishing accessories
20/100	50 x 105 0111 58	End cap
1/10	0112 43	Flat angle
1	0112 32	External angle
1/5	0112 21	Internal angle
1/10	0112 51	Flat junction
20/200	0111 66	Body joint
10/100	0111 63	Cover joint


Pack	Cat.Nos	Cabling accessories
50	0106 82	Clip
20/500	0111 88	Earth link
100/1000	0308 81	Base for cable ties

(1) Number of meters in pack

Bold catalogue numbers are products normally available with Legrand (India) stockists.
Cat. nos. that are not bold - delivery within 4 - 8 weeks from the date of order.


Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) stockists in multiples of the same.

DLP aluminium adaptable trunking system 50 x 150

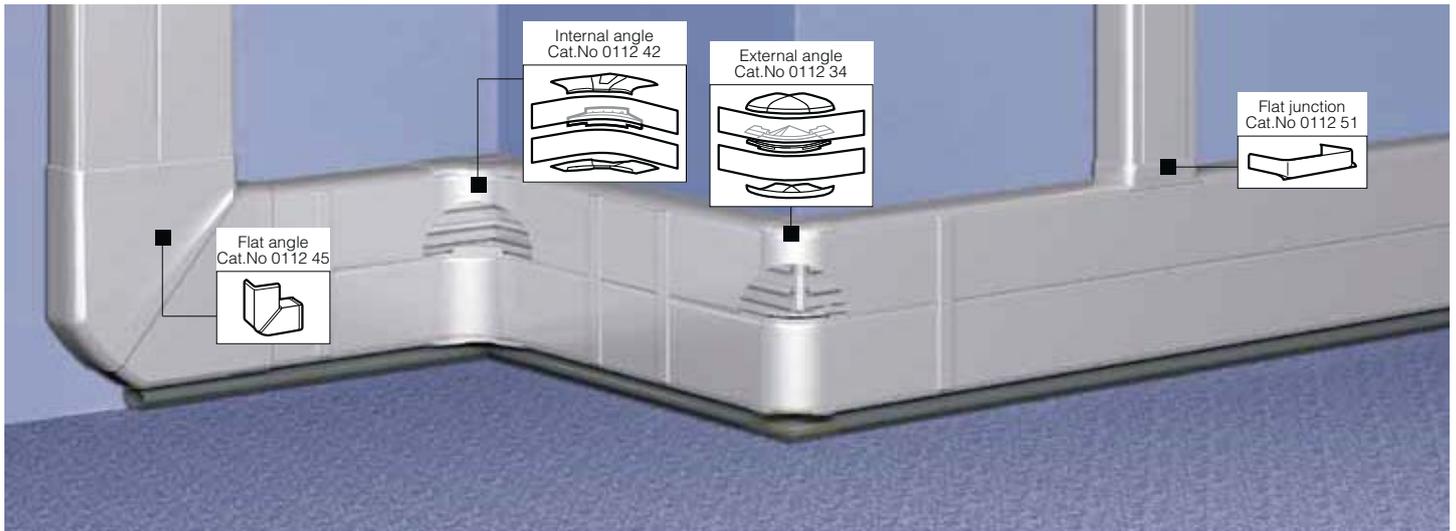

Wiring capacity chart (p. 99)
Selection table (p. 94-95)

Pack	Cat.Nos	Body
4 ⁽¹⁾	50 x 150 0111 02	Supplied without cover Allow fitting of partial covers length 2 m



Pack	Cat.Nos	Covers and partitions
16 ⁽¹⁾ 8 ⁽¹⁾	50 x 150 0111 10 0111 12	Partial rigid cover 65 mm width Full rigid cover 130 width
12 ⁽¹⁾	50 x 150 0111 06	Division partition for cover 65 mm width
24 ⁽¹⁾	0111 08	Separation partition

Pack	Cat.Nos	Finishing accessories
10/50	50 x 150 0111 60	End cap
1/5	0112 45	Flat angle
1	0112 34	External angle
1	0112 42	Internal angle
1/5	0112 51	Flat junction
20/400	0111 66	Body joint
10/100 10/100	0111 62 0111 64	Cover joint for cover 65 mm Cover joint for cover 130 mm

Pack	Cat.Nos	Supports for Arteor™ for cover 65 mm width
20	0112 02	2 modules
5	0112 03	3 modules
10	0112 04	4 modules
5	0112 06	6 modules


Pack	Cat.Nos	Supports for Arteor™ for cover 85 mm width
20	0112 12	2 modules
5/50	0112 13	3 modules
20	0112 14	4 modules
10	0112 16	6 modules

Pack	Cat.Nos	Cabling accessories
50	0106 82	Clip for 65 mm cover
50	0106 86	
20/500	0111 88	Earth link
100/1000	0308 81	Base for cable ties

(1) Number of meters in pack


DLP aluminium adaptable trunking system 50 x 195

Cat.Nos for 50 x 195 trunking

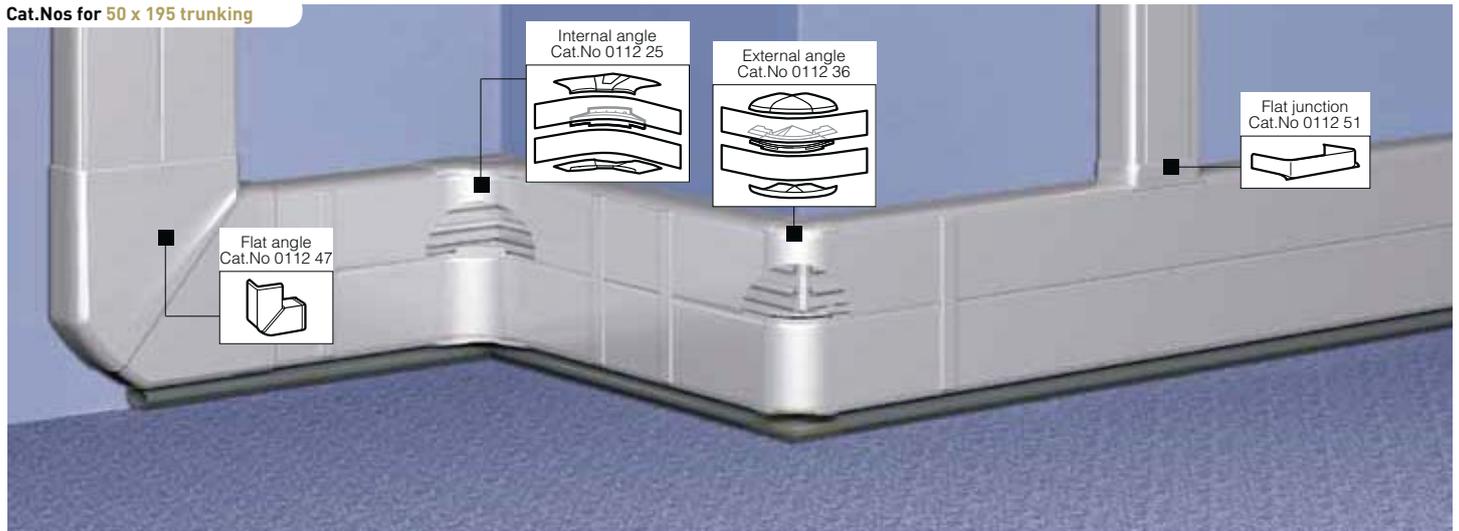

Wiring capacity chart (p. 99)
Selection table (p. 94-95)

Pack	Cat.Nos	Body
4 ⁽¹⁾	50 x 195 0111 04	Supplied without cover Allow fitting of partial covers length 2 m



Pack	Cat.Nos	Covers and partitions
16 ⁽¹⁾ 8 ⁽¹⁾	0111 11 0111 13	Partial rigid cover 85 mm width Full rigid cover 180 width
24 ⁽¹⁾	50 x 195 0111 08	Separation partition
12 ⁽¹⁾	0111 06	Division partition for cover 85 mm width

Pack	Cat.Nos	Supports for Arteor™ for cover 85 mm width
20	0112 12	2 modules
5	0112 13	3 modules
20	0112 14	4 modules
10	0112 16	6 modules

Pack	Cat.Nos	Finishing accessories
10/100	50 x 195 0111 61	End cap
1/5	0112 47	Flat angle
1	0112 36	External angle
1	0112 25	Internal angle
1/5	0112 51	Flat junction
20/400	0111 66	Body joint
10/100	0111 63	Cover joint for cover 85 mm
10/100	0111 65	Cover joint for cover 180 mm

Pack	Cat.Nos	Cabling accessories
50	0106 82	Clip for 85 mm cover
50	0106 86	Clip for 180 mm cover
20/500	0111 88	Earth link
100/1000	0308 81	Base for cable ties

(1) Number of meters in pack

Bold catalogue numbers are products normally available with Legrand (India) stockists.
Cat. nos. that are not bold - delivery within 4 - 8 weeks from the date of order.

Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) stockists in multiples of the same.

DLP aluminium adaptable trunking system

wiring capacity chart

■ Conform to NF EN 50085-2-1

The aluminium trunking range is classified under type 1 in the NF 50085-2-1

■ Calculation of the usable cross-section

Simply add together the usable cross-sections of the conductors or cables you want to run in one compartment

Type of conductor or cable (mm ²)	Usable cross-section (mm ²)	Max. diameter (mm)
1.5	9.7	3.5
2.5	13.9	4.2
4	18.1	4.8
6	31.2	6.3
FTP ⁽¹⁾	-	7

The usable cross-sections in the table opposite are theoretical, and correspond to the minimum dimensions of the conductors. You must assign a packing coefficient of 30% to get closer to the actual conditions in installations

(1) Diameter on a Legrand category 6 4 pair FTP cable

■ Choice of section

Choose your DLP trunking according to the calculated usable cross-section, the number of compartments and whether or not any wiring accessory supports are used

Cross-section	Cross section (mm ²) Max.Ø (mm ²)	50 x 105		50 x 150	
		Cover 85	Cover 65	Cover 65	Cover 130
Cross-section	4 330	3 020	3 020	6 470	
	Max. Ø	28	43	2 x 43	28
With Arteor™ support	Cross-section	2 300	1 470	1 470	-
	Max. Ø	2 x 24	18	18	-
With 60 mm fixing centres	Cross-section	1 660	-	-	2 990
	Max. Ø	2 x 18	-	-	2 x 30
With Lexic support	Cross-section	2 460	1 810	1 810	3 230
	Max. Ø	2 x 21	24	24	2 x 20

	Cross section (mm ²) Max.Ø (mm ²)	50 x 195		
		Cover 85	Cover 85	Cover 180
Trunking only	Cross-section	5 350	5 350	111 60
	Max. Ø	55	55	3 x 54
With Arteor™ support	Cross-section	3 320	3 320	-
	Max. Ø	33	33	-
With 60 mm fixing centres	Cross-section	2 680	2 680	-
	Max. Ø	24	24	-
With Lexic support	Cross-section	3 480	3 480	-
	Max. Ø	35	35	-
With Hypra support	Cross-section	-	-	-
	Max. Ø	-	-	-

Aluminium snap-on columns & mini-columns

Ideal for distribution of power and data vertically, close to the workstations. Power supply via the ceiling and/or the floor
Time saving thanks to the direct clipping system



DISCOVER THE RANGES

Aluminium columns and mini-columns

- Aluminium columns: 1 or 2 compartments and adjustable height (up to 4.7 m)
- Aluminium mini-columns: 2 compartments ; 0.68 m height



▶▶▶ Snap-on aluminium columns and mini-columns



▶▶▶ Arteor sockets for snap-on system



▶▶▶ Cablofil wire mesh cable tray

aluminium snap-on columns

NEW

aluminium columns & poles



6 038 01

Conform to EN 50085-2-4
 For distribution of power vertically
 Power supply via the ceiling and/or the floor
 To be equipped with Arteor wiring accessories (direct clipping)

Pack	Cat.Nos	Columns
		Consisting of: - Aluminium body and cover - Telescopic pole with height adjustment for installing between false ceiling and ceiling (length 1 m) - Two fixing bases with protective caps - Anodised aluminium cover
1	6038 00	74 x 80 mm - 1 compartment Height 2.70 m Can be adapted to a ceiling height up to 3.70 m
1	6038 02	Height 3.70 m Can be adapted to a ceiling height up to 4.70 m
1	6038 01	81 x 130 mm - 2 compartments Height 2.70 m Can be adapted to a ceiling height up to 3.70 m
1	6038 03	Height 3.70 m Can be adapted to a ceiling height up to 4.70 m
36 ⁽¹⁾	6038 07	Separation partition for 74 x 80 and 81 x 130 snap-on columns Height 60 mm, 2 meters
1	6038 05	Mini-column 81 x 130 mm – 2 compartments Height 0.68 m Can be associated with floor trunking range
20	0111 88	Accessory - Earth Link
10	6038 57	Fixing CLIP- Normaclip
10	6038 58	Fixing CLIP - Normaclip

⁽¹⁾ Number of meters in pack

Bold catalogue numbers are products normally available with Legrand (India) stockists. **Cat. nos. that are not bold** - delivery within 4 - 8 weeks from the date of order.
Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) stockists in multiples of the same.
 Red catalogue numbers : new products

n Material characteristics

The columns, covers and partitions are in anodized aluminium.

Plastic accessories:

The accessories (base plate for fixing, protection cover, completion cover and normaclip) below are in plastic PVC with painting grey color aluminium.

The base plate for fixing to the overhead are in polycarbonate color black.

Eco conception :


- Aluminium : material 100% recyclable
- Against mechanical shocks: IK07

aluminium snap-on columns

aluminium columns & poles

Technical characteristics

Height adjustment

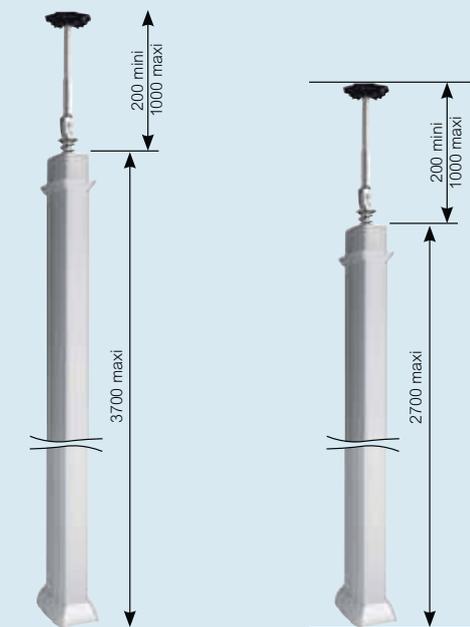


Snap-on column 3.7 m


Snap-on column 2.7 m

Fixing base

1-compartment columns

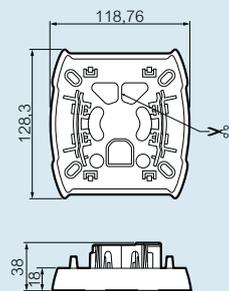

2-compartment columns

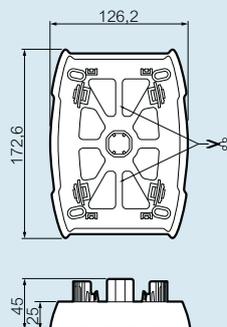

Wiring capacity

1-compartment columns


Max. capacity of conductors (for each type of conductor)	With 45 mm mechanisms	Without wiring accessories
Cross-section	2916	4150
Wire	1.5 mm ² Ø3	324
	2.5 mm ² Ø3.5	238
Cable	3 x 1.5 mm ² Ø9	36
	3 x 2.5 mm ² Ø11	24
	FTP cat. 6 or coaxial Ø7	59

2-compartment columns

Max. capacity of conductors (for each type of conductor)	With 45 mm mechanisms		Without wiring accessories	
Compartment	2	3	2	3
Cross-section	2683	2683	3900	3900
Wire	1.5 mm ² Ø3	298	298	435
	2.5 mm ² Ø3.5	219	219	319
Cable	3 x 1.5 mm ² Ø9	33	33	48
	3 x 2.5 mm ² Ø11	22	22	32
	FTP cat. 6 or coaxial Ø7	54	54	79


Technical data

Pole Cat.No 6038 05

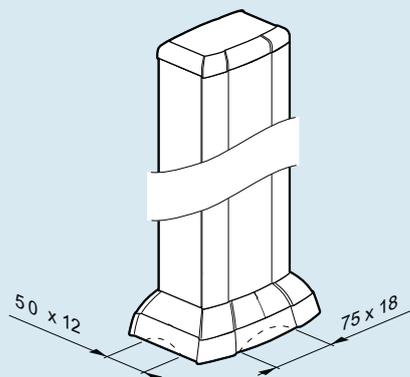

They are composed of:

- An aluminium body of 4 compartments (height=650mm).
- 2 aluminium lids anodized (height 650mm)
- 1 base plate for fixing to the ground (this base is an adapters floor raceways for 50x12 and 75x18)
- 1 protection cover.
- 1 completion cover.
- A bag with earth connection and screws (screw 6x10 and nut HM6)




The energy supply is made by the ground using technical floor or floor raceways.

Poles are not mobile.

It's possible to install a partition Cat.No 6038 07 inside each compartment.

Dimensions

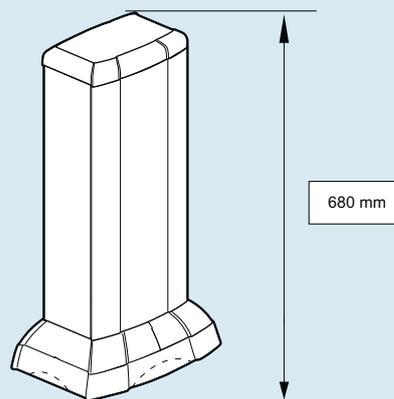


aluminium columns & poles

■ Technical data

Columns Cat.Nos 6038 00/01/02/03 (continued)

Columns 1 compartment Cat.Nos 6038 00/02

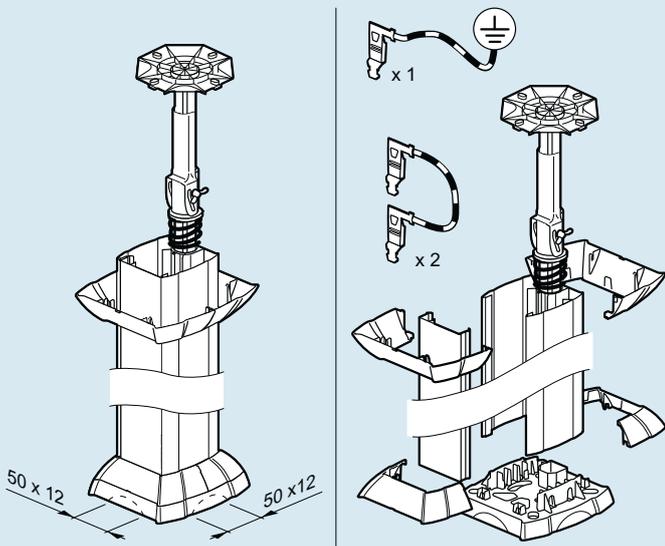


They are available in 2 dimensions following the height of the construction ceiling.

Cat.No 6038 00, Height = 2.70m and can be fixed until height of 3.70m.

Cat.No 6038 02, Height = 3.70m and can be fixed until height of 4.70m.

Note: On the base plate to fix on the ground, you can only connect floor raceways 50x12

Columns 2 compartments Cat.Nos 6038 01/03

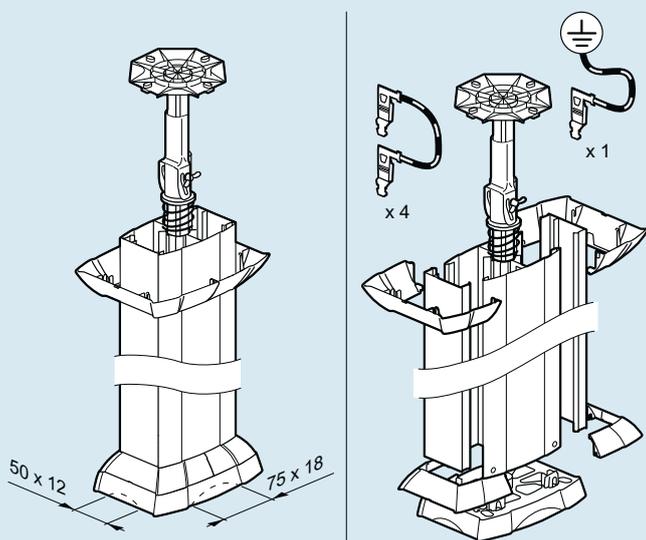

They are available in 2 dimensions following the height of the construction ceiling.

Cat.No 6038 01, Height = 2.70m and can be fixed until height of 3.70m.

Cat.No 6038 03, Height = 3.70m and can be fixed until height of 4.70m.

Note: On the base plate to fix on the ground, you can connect floor raceways 50x12 and 75x18



Accessories.

Normaclip Cat.Nos 6038 57/58

Accessory for fixing wiring devices inside the column
Aluminium color, pack by 10


Allows:

- anti-slip
- anti-pullout
- perfect finish
- respect of the degree protection (IP4X)

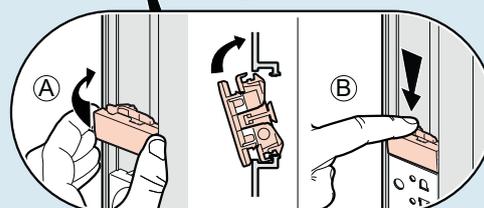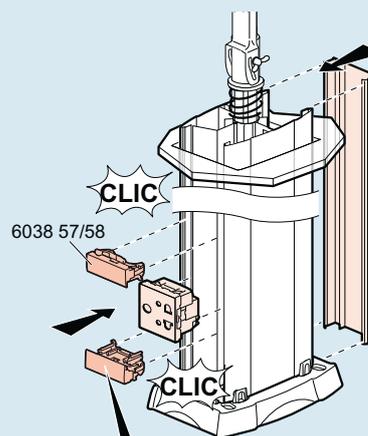

- A - put the normaclip on the body and clip it
B - push it down

After installing the wiring devices:

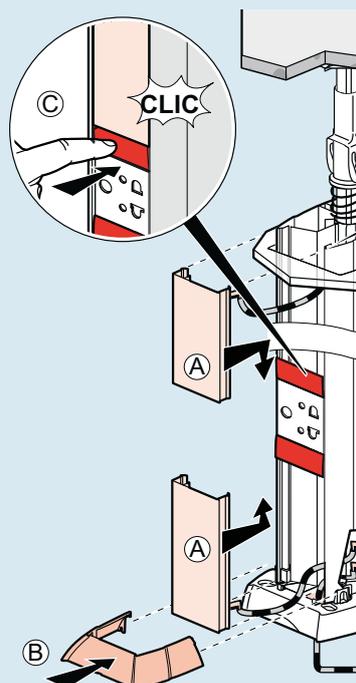


- A - fix the covers
B - clip the protection cover
C - push to lock the normaclip

aluminium columns & poles

■ Technical data


Technical characteristics

To fix columns :

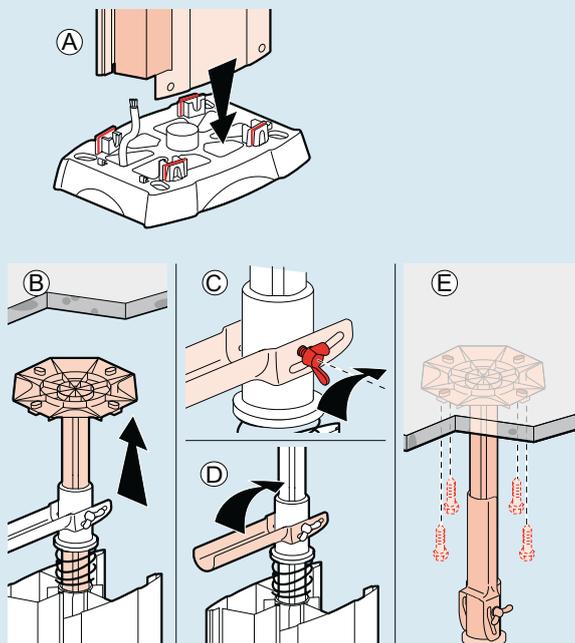

- A - fix the body on the base plate
- B - adjust the telescopic pole between ground and ceiling
- C - tighten using the screw
- D - to fold back the lever against the telescopic pole
- E - fix the base plate or fixing for the overhead to the ceiling

Attention to leave minimal 200mm between the ceiling and the body of the column allowing to correctly fold back the lever against the telescopic pole (locking, to see point 3 above)

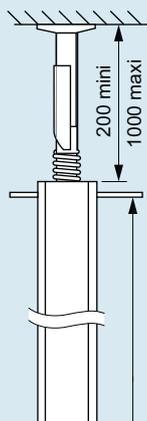

Note: Maximum mounting wiring devices per side = 2 of 8 Mosaic modules.


You can shorten the aluminium body but take care of not cutting the telescopic pole.

The energy supply is made by the ground or the over head but columns and pole are not mobile.

Accessories (continued)


Partition Cat.No 6038 07

For columns 1 or 2 compartments
It's possible to install a partition Cat.No 6038 07 inside each compartment.

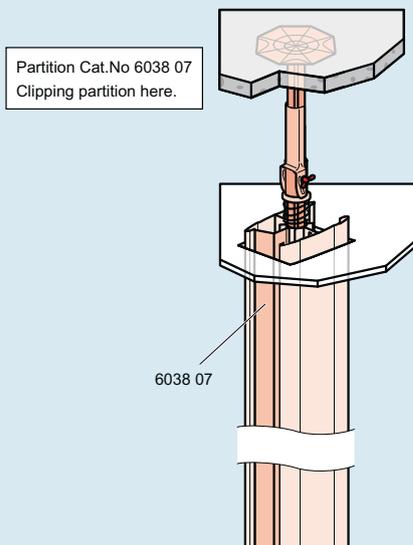



Material : PVC

Earth link Cat.No 11188



Earth link to ground the columns.

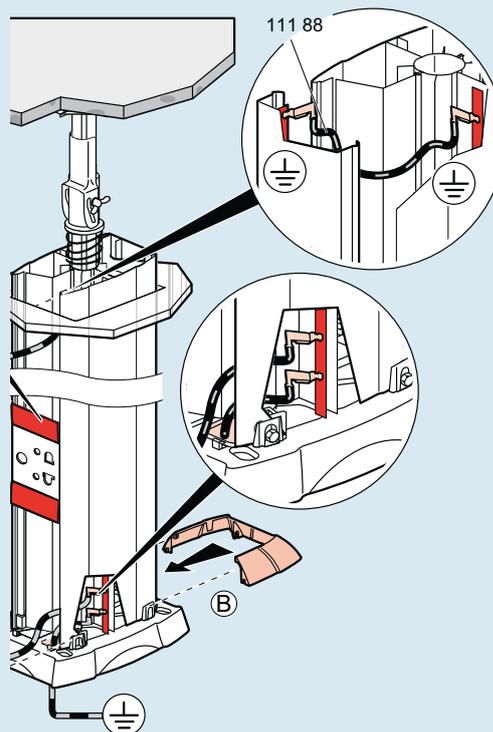

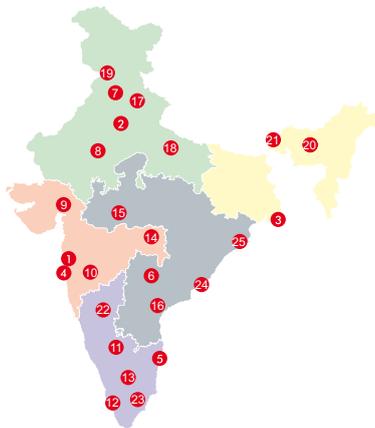

Head office

- 61 & 62, 6th Floor,
Kalpataru Square, Kondivita Road,
Off Andheri-Kurla Road, Andheri (E),
MUMBAI - 400 059.
Tel : (022) 3041 6200
Fax : (022) 3041 6201
Website : www.legrand.co.in

Regional sales offices

- A-25, Mohan Co-operative
Industrial Estate, Mathura Road,
NEW DELHI - 110 044.
Tel : (011) 2699 0028 / 29 / 30, 3990 2200
Fax : (011) 2699 0047
- Bhakta Towers, 2nd & 3rd Floor,
Plot No. KB 22, Salt Lake, Sector - 3,
KOLKATA - 700 098.
Tel : (033) 4021 3535 / 36
Fax : (033) 4021 3537
- 34, 3rd Floor, Kalpataru Square,
Kondivita Road, Off Andheri-Kurla Road,
Andheri (East),
MUMBAI - 400 059.
Tel : (022) 3385 6200
Fax : (022) 3385 6201
- Gee Gee Universal,
8th Floor, Door No. 2, 18/1 & 18/2,
McNichols Road, Chetput,
CHENNAI - 600 031.
Tel : (044) 3024 7200, 2836 4165 / 67 / 68
Fax : (044) 2836 4169
- 205-208, 2nd Floor, Block - II,
White House, Kundan Bagh, Begumpet,
HYDERABAD - 500 016.
Tel : (040) 2341 4398 / 67, 4567 1717
Fax : (040) 6636 6974

Branch offices

- SCO 1-2-3,
Second Floor, Sector 17B,
CHANDIGARH - 160 017.
Tel : (0172) 305 8631 / 32 / 33 / 34 / 35
Fax : (0172) 501 9008
- 507-510, Vth Floor, Soni Paris Point,
Jai Singh Highway, Banipark,
JAIPUR - 302 016.
Telefax : (0141) 511 3129
- 504, Sakar IV,
Opp. M. J. Library, Ellis Bridge,
AHMEDABAD - 380 006. Gujarat
Tel : (079) 2658 6561 / 2
Fax : (079) 2658 6563
- 402, Swastik Chambers,
Near Ashwamegh Marriage Hall,
Behind HP Petrol Pump,
Off Karve Road, Erandwane,
PUNE - 411 004.
Tel : (020) 6729 5600 / 601
Fax : (020) 6729 5604
- 11nd Floor, Al-Latheef Building,
2/1, Union Street, Off. Infantry Road,
BANGALORE - 560 010.
Tel : (080) 2286 1081, 4113 3293 / 4
Fax : (080) 2286 1078
- No. 36/2178, Syda Building, 2nd Floor,
Kaloor - Kadavanthra Road, Kaloor,
KOCHI - 682 017.
Tel : (0484) 234 2921, 658 0921
Fax : (0484) 233 3921
- B-15, Thirumalai Towers,
IV-D, Fourth Floor,
723, Avanashi Road,
COIMBATORE - 641 018.
Tel : (0422) 650 2728, 222 3634 / 0283
Fax : (0422) 222 3164
- Plot No.95, II Floor, Shreyash Heights,
Ramdas Peth, VIP Road,
NAGPUR - 440 010.
Tel : (0712) 662 7857 / 58
Fax : (0712) 662 7859
- 204-205, Megapolis Square,
579, M G Road,
INDORE - 452 001.
Tel : (0731) 393 1650 / 51 / 52
Fax : (0731) 393 1653
- MF-2, Datta's Lords House,
Jammi Chettu Street,
VIJAYAWADA - 520 010.
Tel : (0866) 661 1393, 664 6393
Fax : (0866) 669 9393

Area offices

- ABC Business Club 16,
Tagore Villa, Chakrata Road,
DEHRADUN - 248 001.
Uttaranchal.
Tel : (0135) 271 5189 / 248 001
- Cabin No.104/105,
Trade Point,
Ground Floor,
Saran Chamber 1,
5, Park Road, Hazratganj,
LUCKNOW - 226 001.
Tel : (0522) 223 9044 / 7285
Fax : (0522) 223 9124
- Cabin No. 9,
Second Floor,
Madhok Trade Centre,
Madhok Complex,
Ferozpur Road,
LUDHIANA - 141 001.
Tel/Fax No.: (0161) 277 0301 / 304
- House No. 97, Ground Floor,
Rajgarh Main Road,
Opp. City Heart Nursing Home,
GUWAHATI - 781 007.
Tel : (0361) 245 8498
- 94, Udham Singh Sarani,
Ground Floor, Ashrampara,
SILIGURI - 734 001.
Tel : 94341 91635 / 98009 77780
- Prime Plaza, 2nd Floor, 1st Main,
Girls High School Road,
Near PNB, Deshpande Nagar,
HUBLI - 580 029.
Mobile Nos: 98807 64338 / 98807 64339
- Aparna Towers, 1st Floor,
2/3, Bypass Road,
MADURAI - 625 010.
Telefax : (0452) 230 8414
- 404, Eshwar Plaza,
Dwaraka Nagar, Main Road,
VISHAKHAPATNAM - 530 020.
Tel : (0891) 663 5652
Fax : (0891) 663 9363
- Plot No. 359,
Saheed Nagar, 2nd Floor,
BHUBANESWAR - 751 007.
Tel : (0674) 254 0623

Technical assistance from Legrand

Telephonic technical assistance for selection of products, technical information, guidance, wiring diagrams and estimation is now made available to you at each Regional Office. Contact the Technical Officer of Legrand at the following telephone numbers

- New Delhi** : Tel.: (011) 2699 0028, 3990 2200
Kolkata : Tel.: (033) 4021 3535 / 36
Mumbai : Tel.: (022) 3385 6200
Chennai : Tel.: (044) 3024 7200, 2836 4165 / 67 / 68
Hyderabad : Tel.: (040) 2341 4398 / 67, 4567 1717

For other places, contact the nearest
Regional / Branch / Area offices

customer.care@legrand.co.in

